




# OIL ANALYSIS REPORT



Machine Id  
**412010**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### Sample Rating Trend

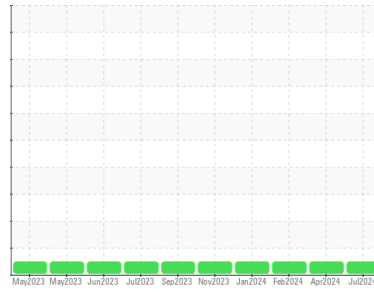

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0091885</b>	GFL0112771	GFL0112719
Sample Date	Client Info		<b>01 Jul 2024</b>	02 Apr 2024	13 Feb 2024
Machine Age	hrs	Client Info	<b>5548</b>	4884	4536
Oil Age	hrs	Client Info	<b>664</b>	4482	4482
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>2</b>	10	2
Chromium	ppm	ASTM D5185m >20	<b>0</b>	1	0
Nickel	ppm	ASTM D5185m >5	<b>0</b>	3	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	5	2
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>0</b>	3	<1
Tin	ppm	ASTM D5185m >15	<b>0</b>	1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	2	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>57</b>	86	54
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>991</b>	1429	875
Calcium	ppm	ASTM D5185m 1070	<b>1113</b>	1477	920
Phosphorus	ppm	ASTM D5185m 1150	<b>1062</b>	1421	984
Zinc	ppm	ASTM D5185m 1270	<b>1288</b>	1767	1153
Sulfur	ppm	ASTM D5185m 2060	<b>3653</b>	4319	2851

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	7	3
Sodium	ppm	ASTM D5185m	<b>3</b>	7	2
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	5	1

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.2</b>	0.3	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.3</b>	7.1	5.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.0</b>	19.0	18.1


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.5</b>	15.1	13.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.5</b>	8.1	8.9




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

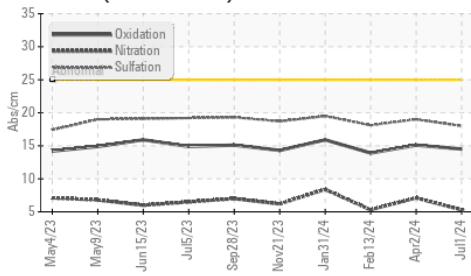

Base Number

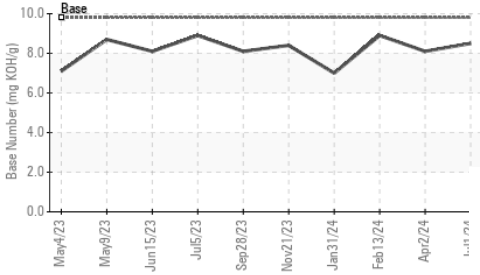

Viscosity @ 100°C

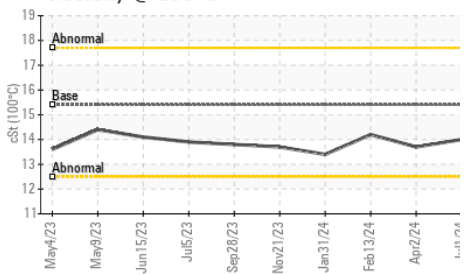


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.0	13.7

## GRAPHS


Ferrous Alloys

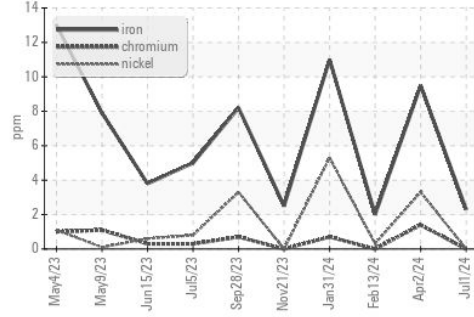


Non-ferrous Metals

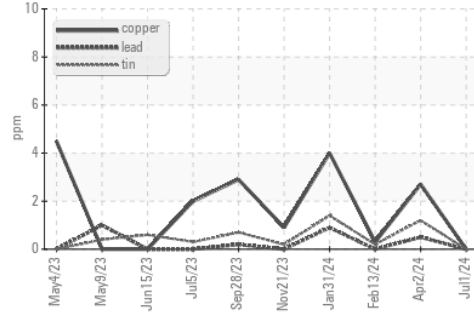

Viscosity @ 100°C

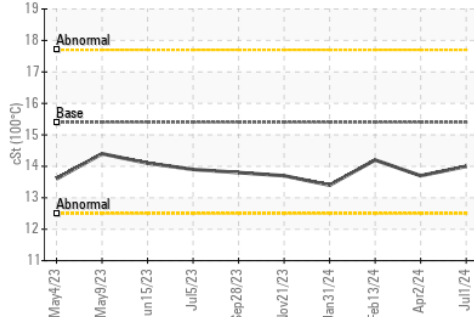

Base Number

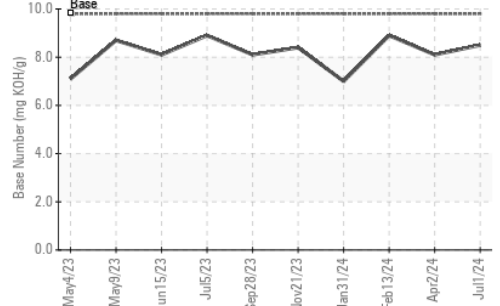

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0091885 **Received** : 05 Jul 2024  
**Lab Number** : 06229447 **Tested** : 09 Jul 2024  
**Unique Number** : 11112940 **Diagnosed** : 09 Jul 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 654 - Richmond Hauling**  
 11800 Lewis Road  
 Chester, VA  
 US 23831  
 Contact: TECHNICIAN ACCOUNT  
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)