


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

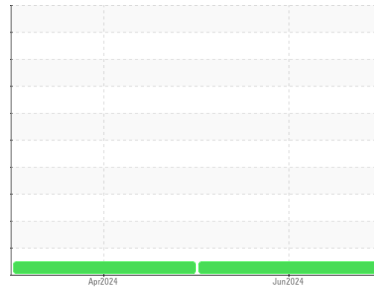

Machine Id
FORD 300 (S/N 1FM5K8D82GGC36046)
 Component
Gasoline Engine
 Fluid
PETRO CANADA SUPREME 5W20 MOTOR OIL (6 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0123148	PCA0117719	---
Sample Date	Client Info			06 Jun 2024	08 Apr 2024	---
Machine Age	mls	Client Info		55986	52042	---
Oil Age	mls	Client Info		3944	3680	---
Oil Changed	Client Info			Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<1.0	<1.0	---
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	5	7	---
Chromium	ppm	ASTM D5185m	>20	0	<1	---
Nickel	ppm	ASTM D5185m	>5	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>40	1	1	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>155	0	2	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	183	58	87	---
Barium	ppm	ASTM D5185m	0	0	2	---
Molybdenum	ppm	ASTM D5185m	36	66	66	---
Manganese	ppm	ASTM D5185m	0	<1	2	---
Magnesium	ppm	ASTM D5185m	417	624	591	---
Calcium	ppm	ASTM D5185m	1318	1305	1199	---
Phosphorus	ppm	ASTM D5185m	773	802	762	---
Zinc	ppm	ASTM D5185m	845	922	844	---
Sulfur	ppm	ASTM D5185m	2690	3395	3215	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	15	17	---
Sodium	ppm	ASTM D5185m	>400	23	14	---
Potassium	ppm	ASTM D5185m	>20	<1	1	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		0.1	0	---
Nitration	Abs/cm	*ASTM D7624	>20	9.5	9.7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.6	20.6	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.9	14.7	---
Base Number (BN)	mg KOH/g	ASTM D2896	6.5	5.0	4.1	---









OIL ANALYSIS REPORT

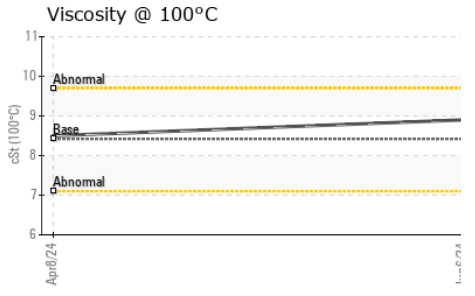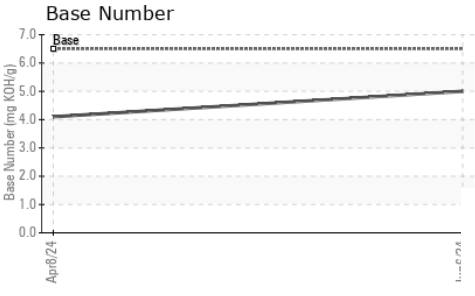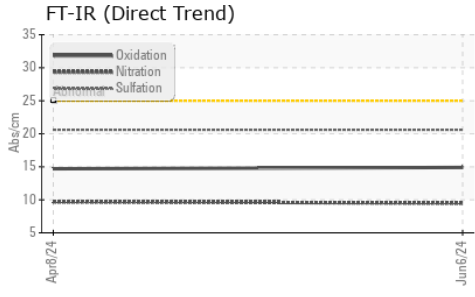

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	8.42	8.5	---

GRAPHS

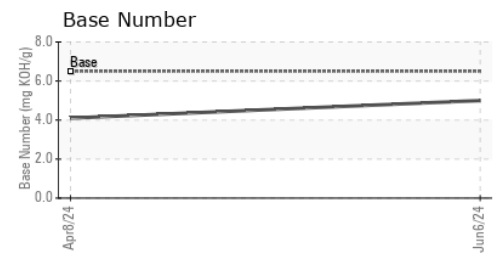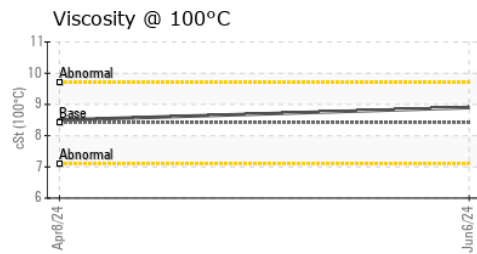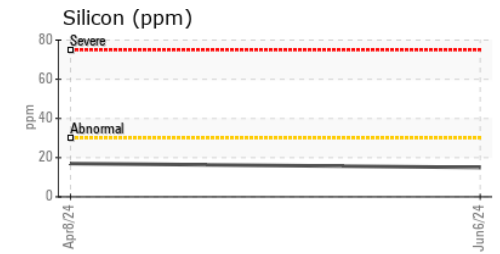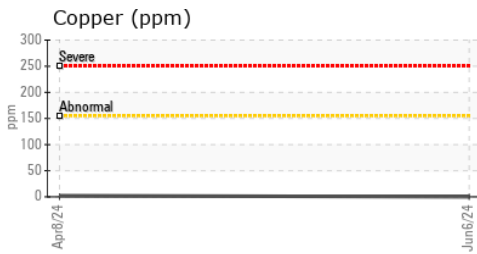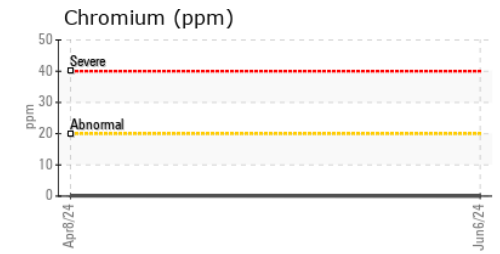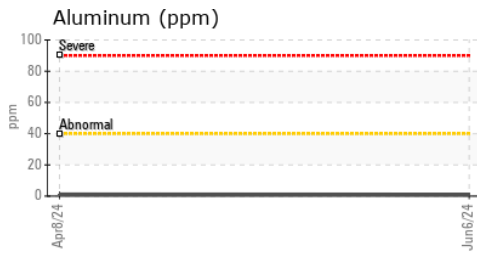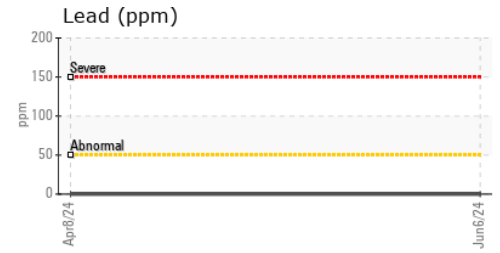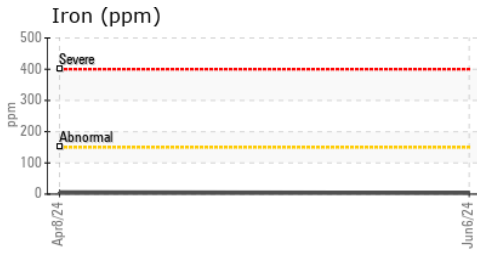

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0123148 **Received** : 05 Jul 2024
Lab Number : 06229526 **Tested** : 09 Jul 2024
Unique Number : 11113019 **Diagnosed** : 09 Jul 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

VILLAGE OF NORTH RIVERSIDE
 2345 S DESPLAINES
 NORTH RIVERSIDE, IL
 US 60546
 Contact: Service Manager
 vznrpdw@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: