




# OIL ANALYSIS REPORT

Sample Rating Trend

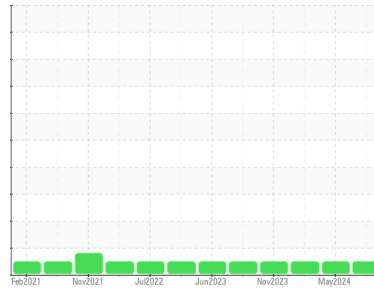

**NORMAL**



Area  
**(BB27195)**  
 Machine Id  
**528008-1107**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Pm services complete )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0116301</b>	GFL0116215	GFL0094876
Sample Date	Client Info	<b>02 Jul 2024</b>	21 May 2024	04 Jan 2024
Machine Age	hrs Client Info	<b>15739</b>	15625	14900
Oil Age	hrs Client Info	<b>841</b>	727	14420
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>57</b>	49	76
Chromium	ppm ASTM D5185m >20	<b>2</b>	1	2
Nickel	ppm ASTM D5185m >4	<b>0</b>	0	<1
Titanium	ppm ASTM D5185m	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm ASTM D5185m >20	<b>5</b>	5	15
Lead	ppm ASTM D5185m >40	<b>3</b>	2	5
Copper	ppm ASTM D5185m >330	<b>4</b>	<1	1
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>8</b>	5	4
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>64</b>	66	66
Manganese	ppm ASTM D5185m 0	<b>1</b>	<1	1
Magnesium	ppm ASTM D5185m 1010	<b>1002</b>	992	1016
Calcium	ppm ASTM D5185m 1070	<b>1222</b>	1150	1157
Phosphorus	ppm ASTM D5185m 1150	<b>1098</b>	1123	1175
Zinc	ppm ASTM D5185m 1270	<b>1346</b>	1332	1399
Sulfur	ppm ASTM D5185m 2060	<b>3122</b>	3138	2911

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>8</b>	7	11
Sodium	ppm ASTM D5185m	<b>6</b>	5	7
Potassium	ppm ASTM D5185m >20	<b>5</b>	4	24

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>1</b>	0.8	1
Nitration	Abs/cm *ASTM D7624 >20	<b>12.4</b>	11.6	11.5
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>25.7</b>	23.8	24.6

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>22.7</b>	21.2	20.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>4.9</b>	4.9	5.4







# OIL ANALYSIS REPORT

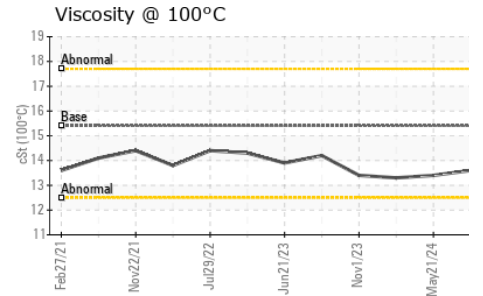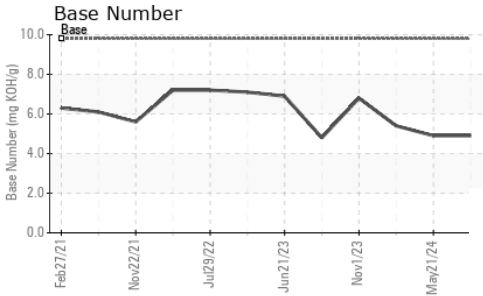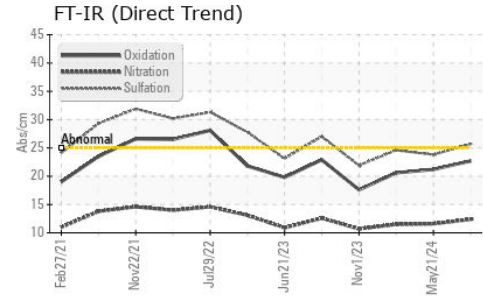

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.6</b>	13.4	13.3

## GRAPHS

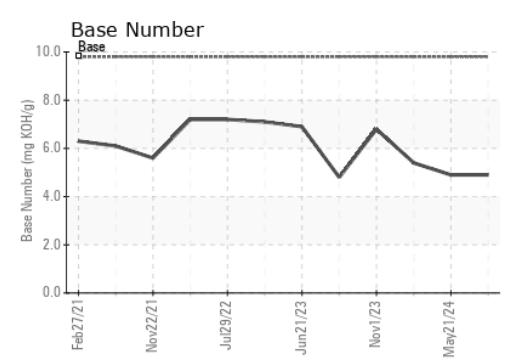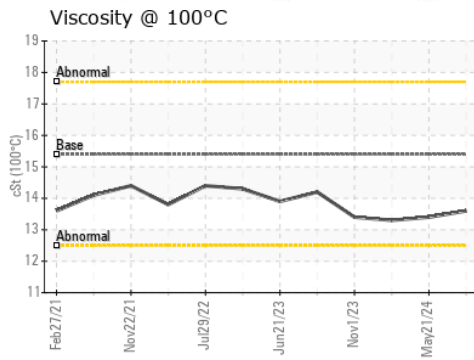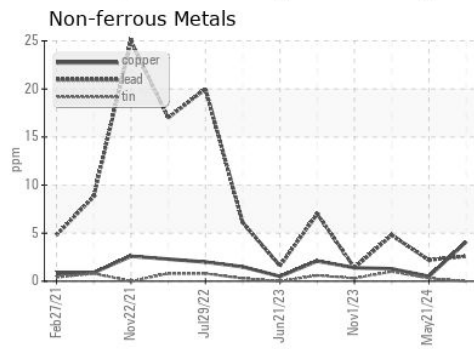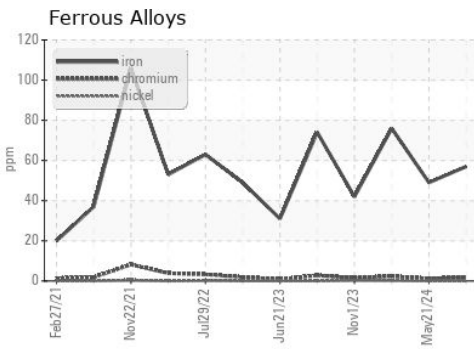

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0116301      **Received** : 05 Jul 2024  
**Lab Number** : **06229598**      **Tested** : 09 Jul 2024  
**Unique Number** : 11113091      **Diagnosed** : 09 Jul 2024 - Jonathan Hester  
**Test Package** : FLEET

**GFL Environmental - 625 - Harrison Hauling**  
 2480 S Clare Ave  
 Clare, MI 48617  
 Contact: Glenda Standen  
 gstanden@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)