

# Area **RIDGEWAY** [RIDGEWAY] DB170105E Unit 05

Natural Gas Engine

#### Fluid PETRO CANADA DURON MONOGRADE HD 40W (350 GAL)

# DIAGNOSIS

### A Recommendation

We advise that you check the fuel injection system. Resample at the next service interval to monitor.

# Wear


All component wear rates are normal.

### Contamination

There is a moderate amount of fuel present in the oil.

## **Fluid Condition**


The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid.

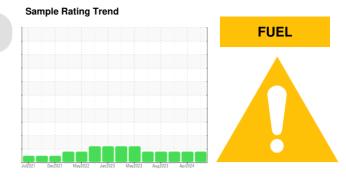



SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0094550	PCA0094548	PCA0094552
Sample Date		Client Info		01 Jul 2024	29 Apr 2024	30 Jan 2024
Machine Age	hrs	Client Info		31787	30920	30322
Oil Age	hrs	Client Info		4027	6510	5912
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				ABNORMAL	MARGINAL	MARGINAL
CONTAMINATI	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
WEAR METALS	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	10	10	9
Chromium	ppm	ASTM D5185m	>4	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m		3	3	3
Lead	ppm	ASTM D5185m	>30	3	2	3
Copper	ppm	ASTM D5185m	>35	5	6	4
Tin	ppm	ASTM D5185m	>4	0	<1	1
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		9	9	10
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		11	12	13
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		946	809	784
Calcium	ppm	ASTM D5185m		1245	1161	1067
Phosphorus		ASTM D5185m		1245	1011	1007
Zinc	ppm	ASTM D5185m		1375	1184	1196
Sulfur	ppm	ASTM D5185m			3411	2967
Sullul	ppm	ASTIVI DSTOSIII				
O ON IT AN AIN LAND	TO			3732	-	
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		current 3	history1 3	<mark>history2</mark> 5
				current	history1 3 3	history2
Silicon Sodium Potassium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>+100 >20	current 3 3 <1	history1 3 3 0	history2 5 3 <1
Silicon Sodium	ppm ppm	ASTM D5185m ASTM D5185m	>+100	current 3 3	history1 3 3	history2 5 3
Silicon Sodium Potassium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>+100 >20	current 3 3 <1	history1 3 3 0	history2 5 3 <1
Silicon Sodium Potassium Fuel	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D3524	>+100 >20 >4.0	current 3 3 <1 ▲ 4.5	history1 3 3 0 ▲ 3.3	history2 5 3 <1 ▲ 3.0
Silicon Sodium Potassium Fuel INFRA-RED	ppm ppm ppm %	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D3524 method	>+100 >20 >4.0 limit/base	current 3 3 <1 ▲ 4.5 current	history1 3 3 0 ▲ 3.3 history1	history2 5 3 <1 ▲ 3.0 history2
Silicon Sodium Potassium Fuel INFRA-RED Soot %	ppm ppm ppm %	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D3524 method *ASTM D7844	>+100 >20 >4.0 limit/base	current 3 3 <1 ▲ 4.5 current 0.1	history1 3 3 0 ▲ 3.3 history1 0.1	history2 5 3 <1 ▲ 3.0 history2 0.1
Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration	ppm ppm % % Abs/cm Abs/.1mm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D3524 <b>method</b> *ASTM D7844 *ASTM D7624	>+100 >20 >4.0 limit/base	current   3   3   <1	history1 3 3 0 ▲ 3.3 history1 0.1 4.8	history2 5 3 <1 ▲ 3.0 history2 0.1 4.8
Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation	ppm ppm % % Abs/cm Abs/.1mm	ASTM D5185m ASTM D5185m ASTM D3524 ASTM D3524 *ASTM D7844 *ASTM D7844 *ASTM D7624	>+100 >20 >4.0 limit/base >20 >30	current   3   -1   ▲ 4.5   current   0.1   5.0   14.8	history1 3 3 0 ▲ 3.3 history1 0.1 4.8 14.2	history2 5 3 <1 ▲ 3.0 history2 0.1 4.8 14.4
Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation FLUID DEGRAD	ppm ppm % % Abs/cm Abs/cm Abs/1mm	ASTM D5185m ASTM D5185m ASTM D3524 ASTM D3524 *ASTM D7844 *ASTM D7624 *ASTM D7415	>+100 >20 >4.0 limit/base >20 >30 limit/base	Current   3   3   <1	history1 3 3 0 ▲ 3.3 history1 0.1 4.8 14.2 history1	history2 5 3 <1 ▲ 3.0 history2 0.1 4.8 14.4 history2





# **OIL ANALYSIS REPORT**






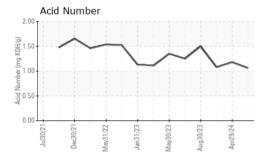



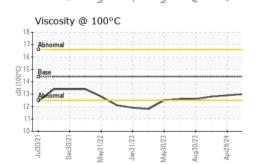

Certificate 12367

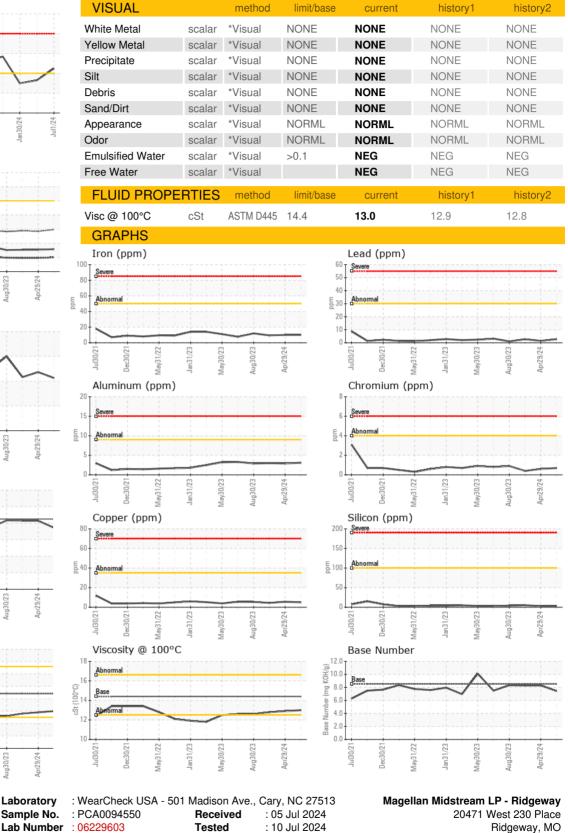

: 10 Jul 2024 - Jonathan Hester



Laboratory

Sample No.

Unique Number : 11113096

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Diagnosed

Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

Contact: Kevin Meister kevin.meister@magellanlp.com T: (660)872-6417 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) E:

Submitted By: Kevin Meister

Page 2 of 2

US 64481