




# OIL ANALYSIS REPORT

## Sample Rating Trend

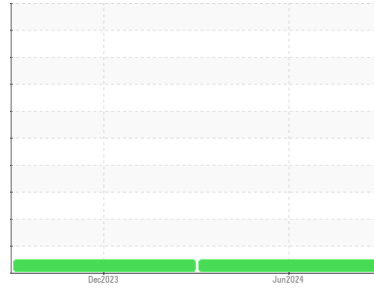

**NORMAL**



Machine Id

**413129**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0066543</b>	GFL0066523	---
Sample Date	Client Info		<b>24 Jun 2024</b>	20 Dec 2023	---
Machine Age	mls	Client Info	<b>59764</b>	44845	---
Oil Age	mls	Client Info	<b>59764</b>	44845	---
Oil Changed	Client Info		<b>Changed</b>	Not Changd	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>11</b>	11	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m	<b>1</b>	0	---
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	5	---
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m >330	<b>2</b>	0	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>33</b>	156	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 60	<b>45</b>	49	---
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m 1010	<b>52</b>	215	---
Calcium	ppm	ASTM D5185m 1070	<b>2415</b>	1851	---
Phosphorus	ppm	ASTM D5185m 1150	<b>1005</b>	1046	---
Zinc	ppm	ASTM D5185m 1270	<b>1248</b>	1210	---
Sulfur	ppm	ASTM D5185m 2060	<b>3309</b>	3304	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>11</b>	7	---
Sodium	ppm	ASTM D5185m	<b>2</b>	0	---
Potassium	ppm	ASTM D5185m >20	<b>5</b>	11	---

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.3	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.2</b>	8.4	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.4</b>	21.1	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>10.7</b>	14.8	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.7</b>	6.5	---







# OIL ANALYSIS REPORT

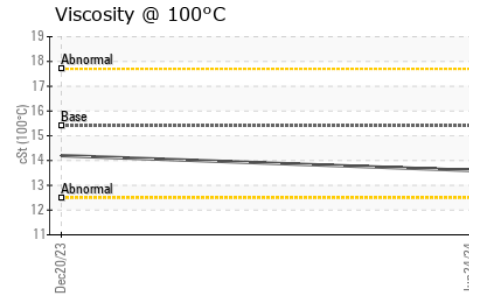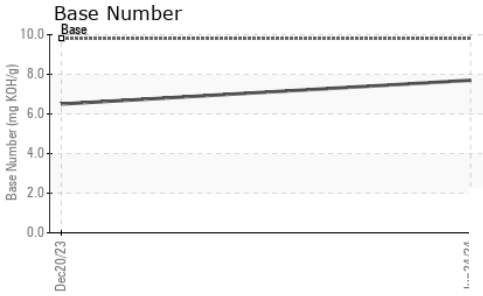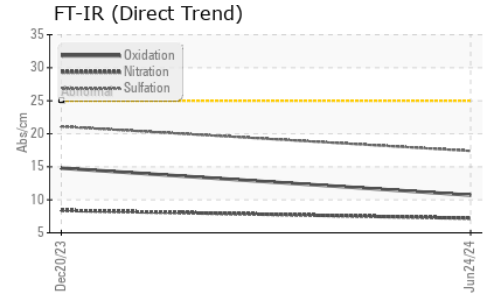

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.6</b>	14.2

## GRAPHS

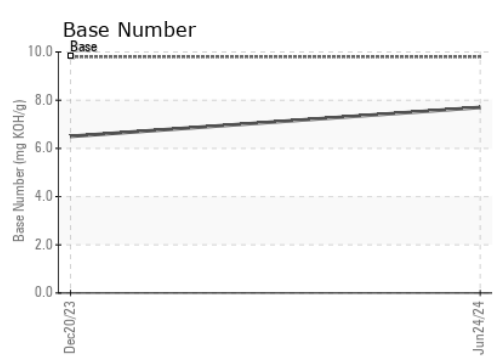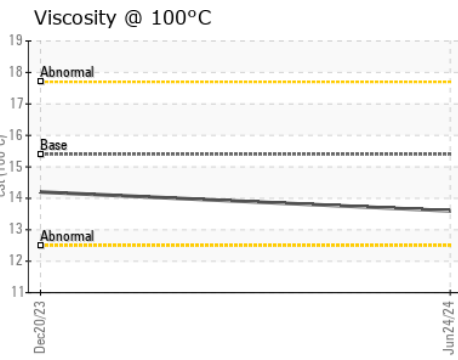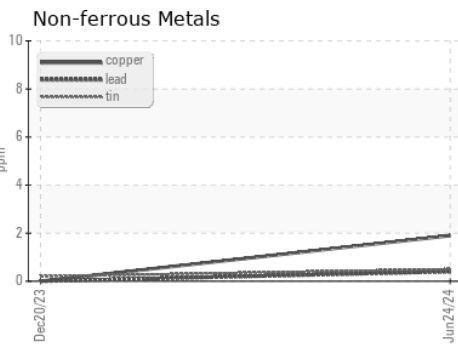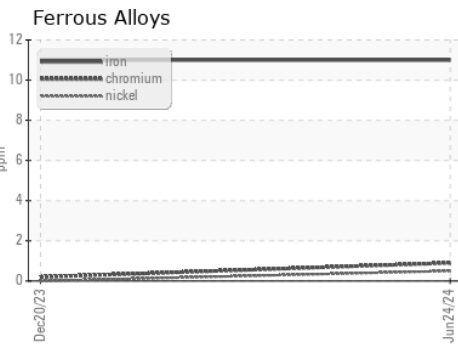

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0066543      **Received** : 08 Jul 2024  
**Lab Number** : **06229867**      **Tested** : 09 Jul 2024  
**Unique Number** : 11113360      **Diagnosed** : 09 Jul 2024 - Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 977 - Montgomery Hauling**  
 17851 Highway 105 E  
 Conroe, TX  
 US 77306  
 Contact: CHRIS YOUNG  
 christophery@gflenv.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)