




OIL ANALYSIS REPORT



Area
(61AATE6)
 Machine Id
214010
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

Sample Rating Trend

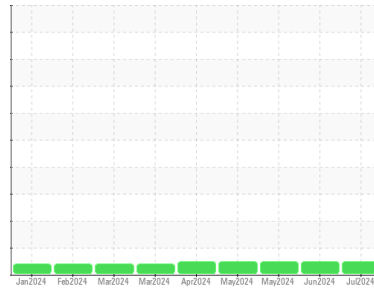

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0121440	GFL0115806	GFL0115841
Sample Date	Client Info		02 Jul 2024	25 Jun 2024	13 May 2024
Machine Age	hrs	Client Info	1113	1105	814
Oil Age	hrs	Client Info	582	574	283
Oil Changed	Client Info		Changed	Not Changd	Not Changd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	26	29	20
Chromium	ppm	ASTM D5185m >20	<1	2	3
Nickel	ppm	ASTM D5185m >5	0	<1	3
Titanium	ppm	ASTM D5185m >2	<1	<1	2
Silver	ppm	ASTM D5185m >2	0	<1	3
Aluminum	ppm	ASTM D5185m >20	7	8	6
Lead	ppm	ASTM D5185m >40	0	<1	3
Copper	ppm	ASTM D5185m >330	9	10	9
Tin	ppm	ASTM D5185m >15	0	<1	3
Vanadium	ppm	ASTM D5185m	0	<1	2
Cadmium	ppm	ASTM D5185m	0	<1	2

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	5	6	8
Barium	ppm	ASTM D5185m 0	0	2	2
Molybdenum	ppm	ASTM D5185m 60	63	66	62
Manganese	ppm	ASTM D5185m 0	<1	2	3
Magnesium	ppm	ASTM D5185m 1010	865	930	828
Calcium	ppm	ASTM D5185m 1070	1140	1158	1080
Phosphorus	ppm	ASTM D5185m 1150	1151	1049	924
Zinc	ppm	ASTM D5185m 1270	1241	1269	1106
Sulfur	ppm	ASTM D5185m 2060	2880	3075	2996

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	8	10	9
Sodium	ppm	ASTM D5185m	1	1	3
Potassium	ppm	ASTM D5185m >20	17	20	9

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	8.1	8.3	6.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.6	18.8	17.7


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.4	16.0	14.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.6	7.5	8.4




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

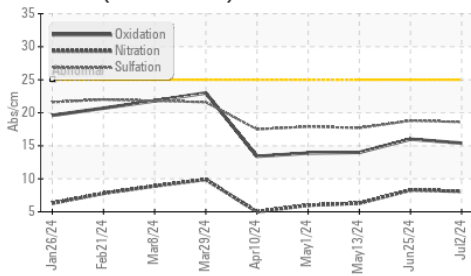

Base Number

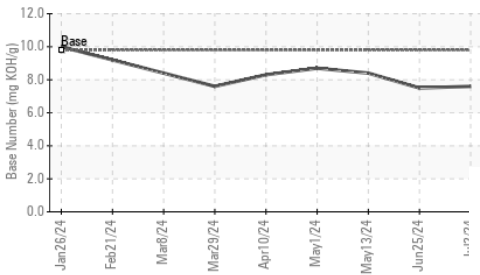





Viscosity @ 100°C

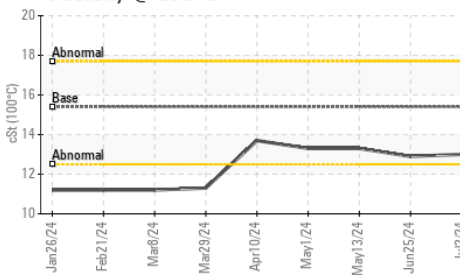

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.0	12.9

GRAPHS

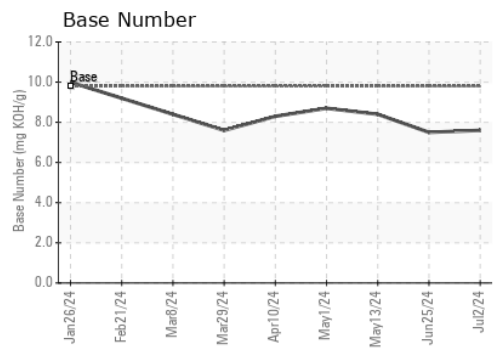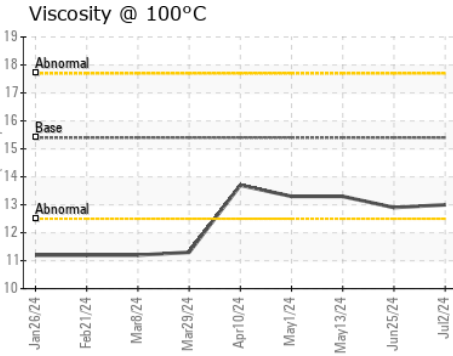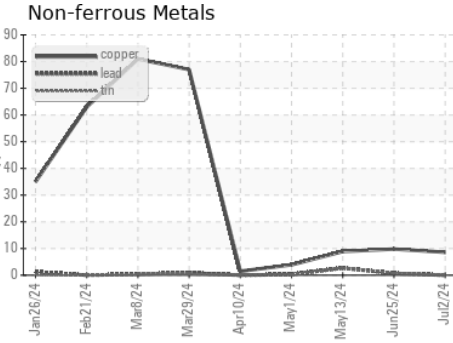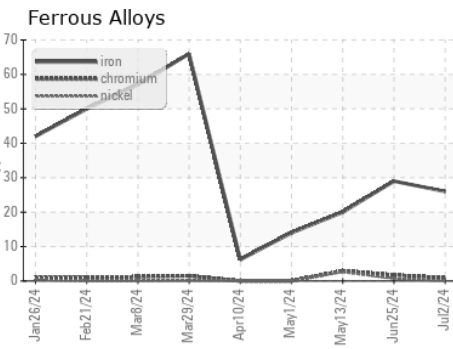

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0121440
Lab Number : 06229984
Unique Number : 11113477
Test Package : FLEET
Received : 08 Jul 2024
Tested : 09 Jul 2024
Diagnosed : 09 Jul 2024 - Wes Davis

GFL Environmental - 868 - Childersburg Fines Hauling (Alpine)
 13737 Plant Rd
 Childersburg, AL
 US 35044
 Contact: JONATHAN WILLIAMS
 jonathan.williams@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)