


OIL ANALYSIS REPORT

Machine Id
5108
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

Sample Rating Trend

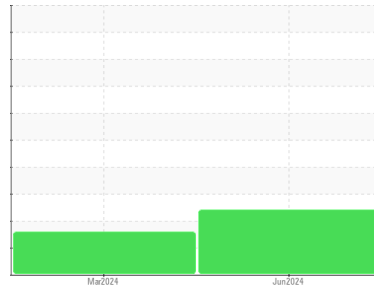

DIAGNOSIS

- Recommendation**
 No corrective action is recommended at this time. Resample at the next service interval to monitor.
- Wear**
 Cylinder, crank, or cam shaft wear is indicated. All other component wear rates are normal.
- Contamination**
 Elemental level of silicon (Si) above normal indicating ingress of seal material.
- Fluid Condition**
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0128874	PCA0120675	---
Sample Date	Client Info	29 Jun 2024	07 Mar 2024	---
Machine Age	hrs	Client Info	750	---
Oil Age	hrs	Client Info	0	---
Oil Changed	Client Info	N/A	Not Changd	---
Sample Status		ABNORMAL	ABNORMAL	---

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	---
Water	WC Method >0.2	NEG	NEG	---
Glycol	WC Method	NEG	NEG	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	▲ 129	44	---
Chromium	ppm ASTM D5185m >20	2	<1	---
Nickel	ppm ASTM D5185m >4	<1	0	---
Titanium	ppm ASTM D5185m	<1	0	---
Silver	ppm ASTM D5185m >3	<1	0	---
Aluminum	ppm ASTM D5185m >20	15	5	---
Lead	ppm ASTM D5185m >40	3	<1	---
Copper	ppm ASTM D5185m >330	271	38	---
Tin	ppm ASTM D5185m >15	6	<1	---
Vanadium	ppm ASTM D5185m	<1	0	---
Cadmium	ppm ASTM D5185m	0	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	67	195	---
Barium	ppm ASTM D5185m 0	6	3	---
Molybdenum	ppm ASTM D5185m 50	21	20	---
Manganese	ppm ASTM D5185m 0	3	2	---
Magnesium	ppm ASTM D5185m 950	187	184	---
Calcium	ppm ASTM D5185m 1050	1197	991	---
Phosphorus	ppm ASTM D5185m 995	1010	818	---
Zinc	ppm ASTM D5185m 1180	1158	934	---
Sulfur	ppm ASTM D5185m 2600	2628	2894	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	▲ 49	▲ 51	---
Sodium	ppm ASTM D5185m	3	<1	---
Potassium	ppm ASTM D5185m >20	6	4	---

INFRA-RED


method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	1.1	0.1	---
Nitration	Abs/cm *ASTM D7624 >20	10.6	4.8	---
Sulfation	Abs/.1mm *ASTM D7415 >30	23.3	18.2	---

FLUID DEGRADATION


method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	21.6	15.1	---
Base Number (BN)	mg KOH/g ASTM D2896	5.5	7.0	---

OIL ANALYSIS REPORT


▲ Ferrous Alloys

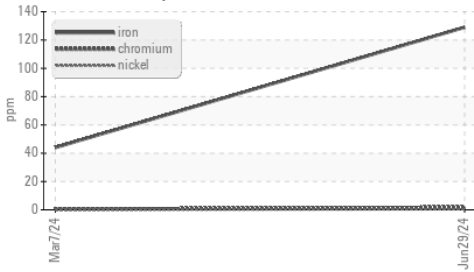


● FT-IR (Direct Trend)

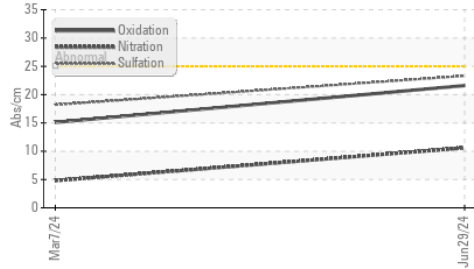


● FT-IR (Direct Trend)

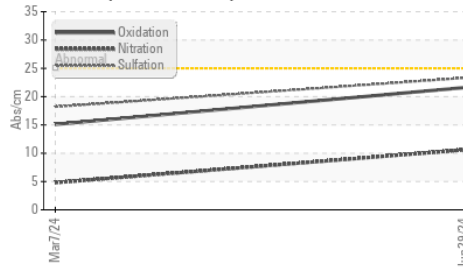

Base Number

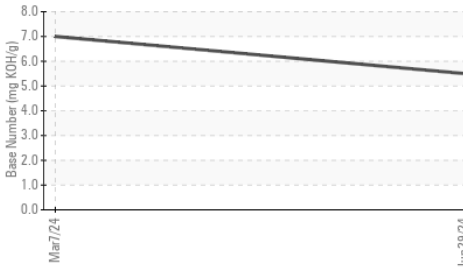

Viscosity @ 100°C

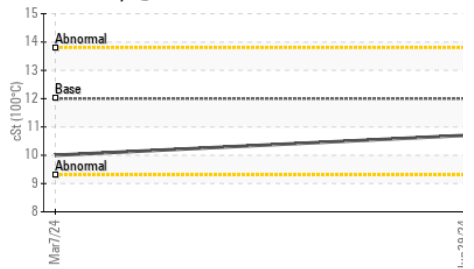


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---


PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.7	10.0

GRAPHS


▲ Iron (ppm)

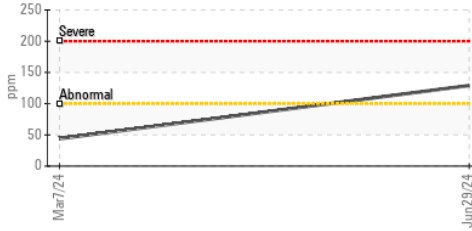

Lead (ppm)

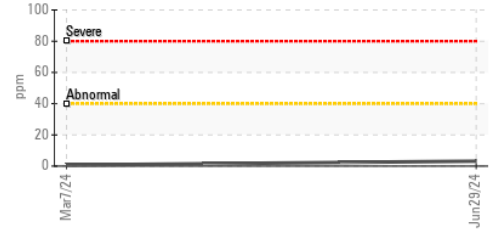


Aluminum (ppm)

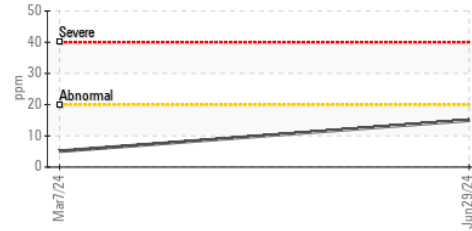


Chromium (ppm)




Copper (ppm)

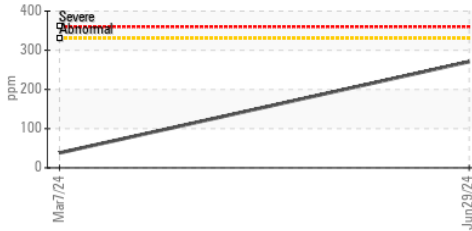


▲ Silicon (ppm)

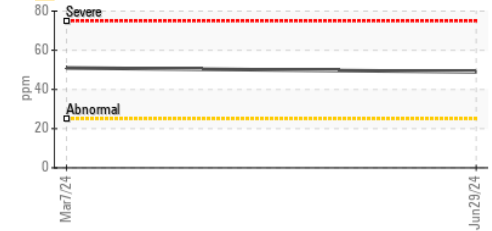

Viscosity @ 100°C

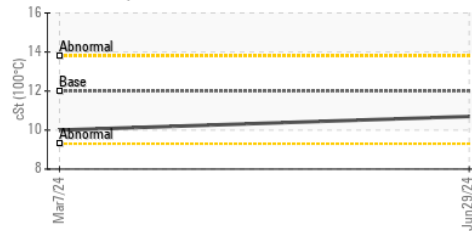

Base Number

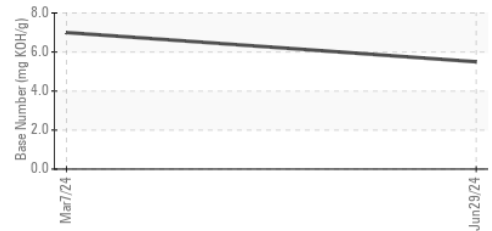

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0128874 **Received** : 08 Jul 2024
Lab Number : 06229997 **Tested** : 09 Jul 2024
Unique Number : 11113490 **Diagnosed** : 09 Jul 2024 - Don Baldrige
Test Package : MOB 1 (Additional Tests: TBN)

MILLER TRUCK LEASING #119
 39 INDUSTRIAL AVE
 HASBROUCK HEIGHTS, NJ
 US 07604
 Contact: MIKE LONGETTE
 mlongette@millertransgroup.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (201)528-7053