


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

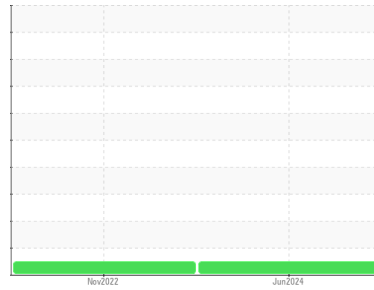

Area
Plymouth & Brockton
 Machine Id
434
 Component
Transmission (Auto)
 Fluid
BP AUTRAN SYN 295 (32 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0104513	PCA0072278	---
Sample Date	Client Info		21 Jun 2024	05 Nov 2022	---
Machine Age	mls	Client Info	316700	0	---
Oil Age	mls	Client Info	78000	0	---
Oil Changed	Client Info		Changed	N/A	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >160	70	103	---
Chromium	ppm	ASTM D5185m >5	<1	<1	---
Nickel	ppm	ASTM D5185m >5	<1	0	---
Titanium	ppm	ASTM D5185m	<1	0	---
Silver	ppm	ASTM D5185m >5	<1	0	---
Aluminum	ppm	ASTM D5185m >50	19	21	---
Lead	ppm	ASTM D5185m >50	7	24	---
Copper	ppm	ASTM D5185m >225	16	12	---
Tin	ppm	ASTM D5185m >10	3	3	---
Vanadium	ppm	ASTM D5185m	<1	0	---
Cadmium	ppm	ASTM D5185m	<1	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	84	105	---
Barium	ppm	ASTM D5185m	0	0	---
Molybdenum	ppm	ASTM D5185m	<1	<1	---
Manganese	ppm	ASTM D5185m	<1	2	---
Magnesium	ppm	ASTM D5185m	2	0	---
Calcium	ppm	ASTM D5185m	82	45	---
Phosphorus	ppm	ASTM D5185m	228	269	---
Zinc	ppm	ASTM D5185m	8	6	---
Sulfur	ppm	ASTM D5185m	1076	556	---


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	6	4	---
Sodium	ppm	ASTM D5185m	3	6	---
Potassium	ppm	ASTM D5185m >20	4	<1	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.17	1.10	---

OIL ANALYSIS REPORT

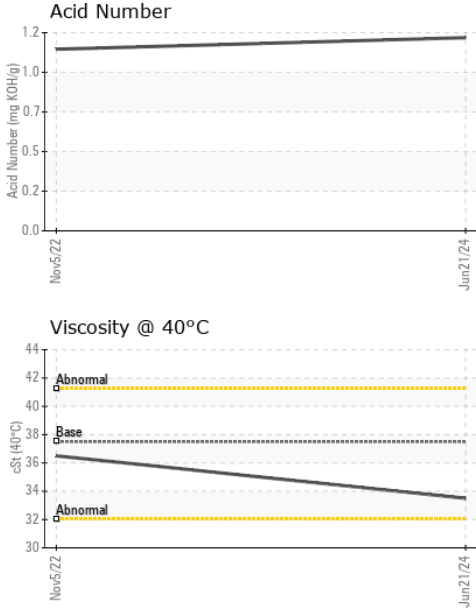


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	37.5	33.5	36.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

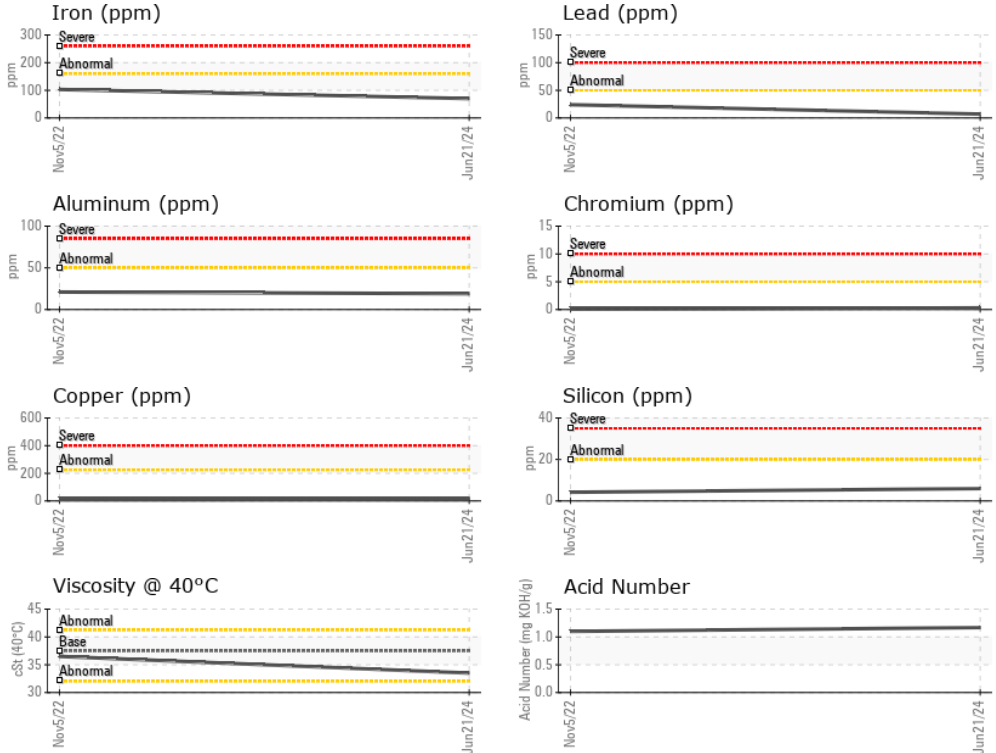

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0104513 **Received** : 08 Jul 2024
Lab Number : **06230326** **Tested** : 09 Jul 2024
Unique Number : 11113819 **Diagnosed** : 09 Jul 2024 - Wes Davis
Test Package : MOB 2

PLYMOUTH & BROCKTON
 8 INDUSTRIAL PARK RD
 PLYMOUTH, MA
 US 02360
 Contact: Donald Pelquin
 Dpelquin@P-B.com
 T: (508)732-6039
 F: (508)732-6091

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)