


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

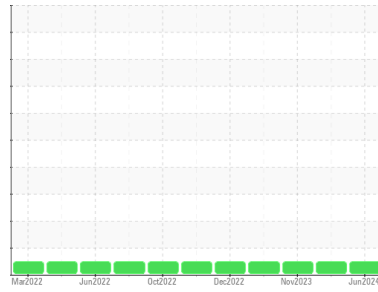

Area  
**Plymouth & Brockton**

Machine Id  
**11429**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (39 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0110104</b>	PCA0104433	PCA0104677
Sample Date	Client Info		<b>29 Jun 2024</b>	07 Mar 2024	11 Nov 2023
Machine Age	mls	Client Info	<b>376652</b>	360509	338820
Oil Age	mls	Client Info	<b>24000</b>	24000	24000
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>33</b>	42	26
Chromium	ppm	ASTM D5185m >20	<b>2</b>	2	2
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	4	3
Lead	ppm	ASTM D5185m >40	<b>19</b>	19	24
Copper	ppm	ASTM D5185m >330	<b>2</b>	2	<1
Tin	ppm	ASTM D5185m >15	<b>2</b>	<1	2
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>11</b>	8	6
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>70</b>	65	67
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>1012</b>	1029	1009
Calcium	ppm	ASTM D5185m 1070	<b>1195</b>	1178	1220
Phosphorus	ppm	ASTM D5185m 1150	<b>1044</b>	994	1126
Zinc	ppm	ASTM D5185m 1270	<b>1337</b>	1278	1394
Sulfur	ppm	ASTM D5185m 2060	<b>3019</b>	3224	2944

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>10</b>	11	8
Sodium	ppm	ASTM D5185m	<b>5</b>	9	5
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	0




## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.8</b>	0.9	0.8
Nitration	Abs/cm	*ASTM D7624 >20	<b>13.1</b>	13.7	13.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>27.2</b>	28.4	27.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>26.5</b>	28.7	26.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.69</b>	7.07	5.83









# OIL ANALYSIS REPORT

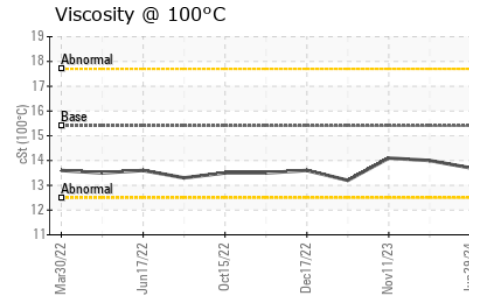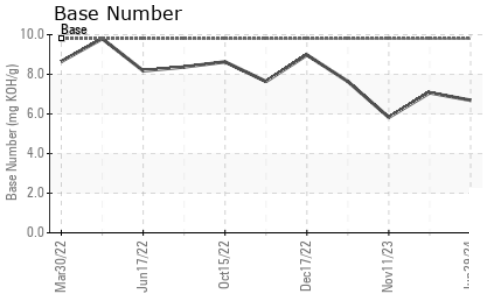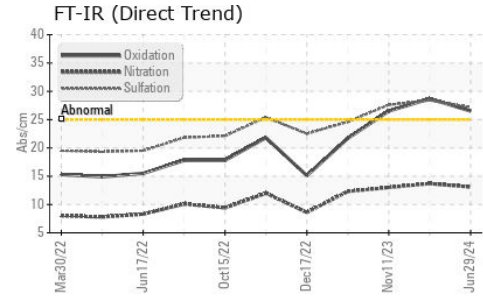

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	14.0	14.1

## GRAPHS

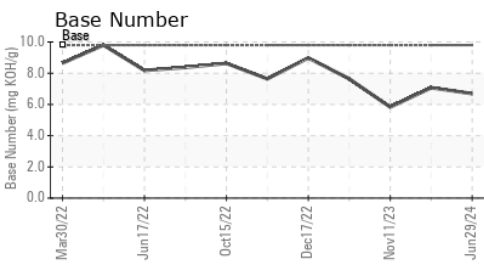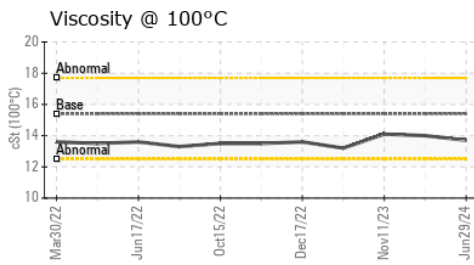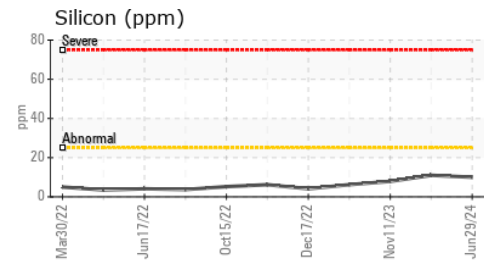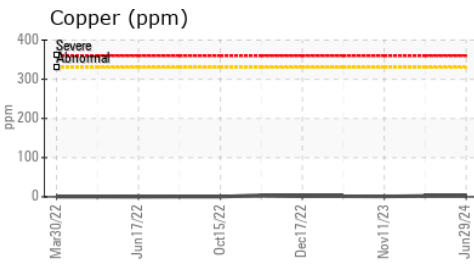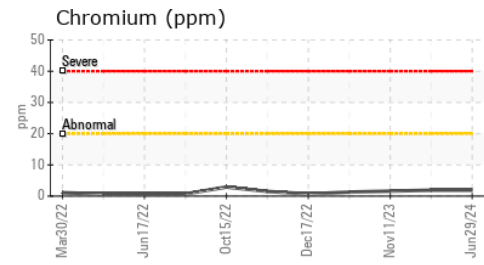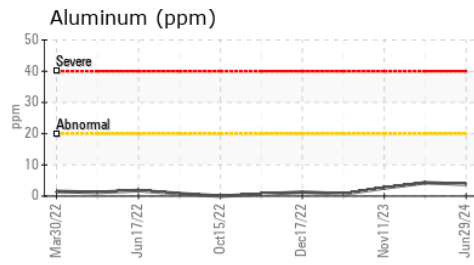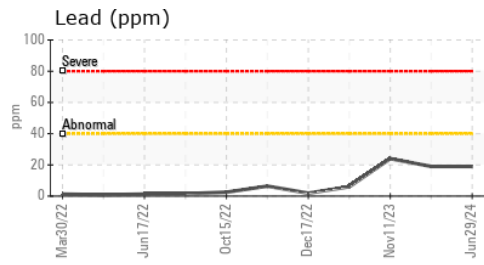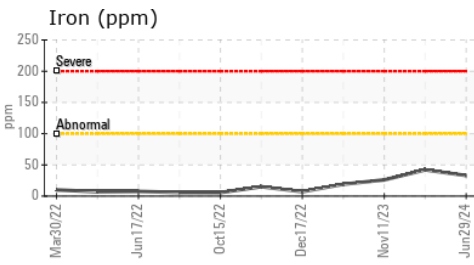

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0110104      **Received** : 08 Jul 2024  
**Lab Number** : **06230376**      **Tested** : 09 Jul 2024  
**Unique Number** : 11113869      **Diagnosed** : 10 Jul 2024 - Don Baldrige  
**Test Package** : MOB 2

**PLYMOUTH & BROCKTON**  
 8 INDUSTRIAL PARK RD  
 PLYMOUTH, MA  
 US 02360  
 Contact: Donald Pelquin  
 Dpelquin@P-B.com  
 T: (508)732-6039  
 F: (508)732-6091

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)