


# OIL ANALYSIS REPORT



Area  
**G.LOPES CONSTRUCTION INC./Off-Road**  
 Machine Id  
**L33**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### Sample Rating Trend

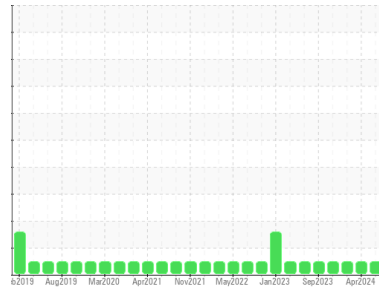

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0122718</b>	PCA0122605	PCA0018796
Sample Date	Client Info		<b>02 Jul 2024</b>	23 Apr 2024	07 Feb 2024
Machine Age	hrs	Client Info	<b>11800</b>	11001	11001
Oil Age	hrs	Client Info	<b>7263</b>	6464	6908
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>24</b>	20	5
Chromium	ppm	ASTM D5185m >20	<b>1</b>	<1	0
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	1	<1
Lead	ppm	ASTM D5185m >40	<b>9</b>	7	5
Copper	ppm	ASTM D5185m >330	<b>6</b>	4	3
Tin	ppm	ASTM D5185m >15	<b>1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>5</b>	2	8
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>68</b>	67	61
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m 1010	<b>1087</b>	1138	946
Calcium	ppm	ASTM D5185m 1070	<b>1302</b>	1361	1068
Phosphorus	ppm	ASTM D5185m 1150	<b>1098</b>	1216	1052
Zinc	ppm	ASTM D5185m 1270	<b>1436</b>	1443	1270
Sulfur	ppm	ASTM D5185m 2060	<b>3219</b>	3934	2977

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	3	0
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	3	1
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	<1




## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.3	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.7</b>	11.9	10.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>26.7</b>	26.5	23.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>26.3</b>	27.1	22.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.15</b>	8.37	9.76









# OIL ANALYSIS REPORT

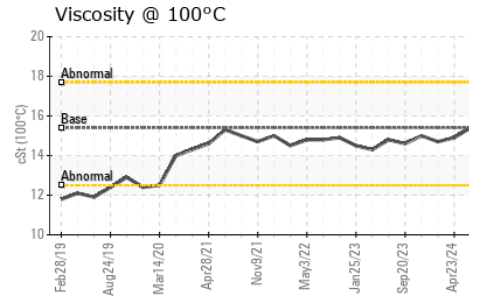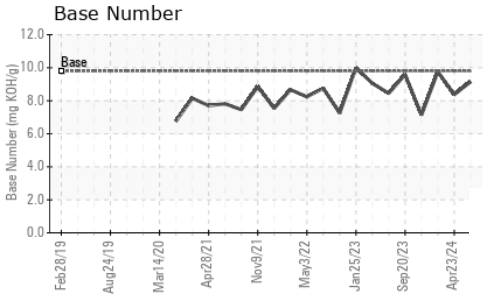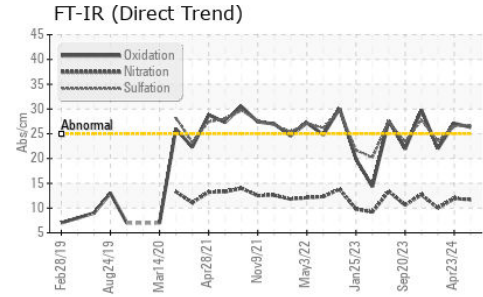

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.9	14.7

## GRAPHS

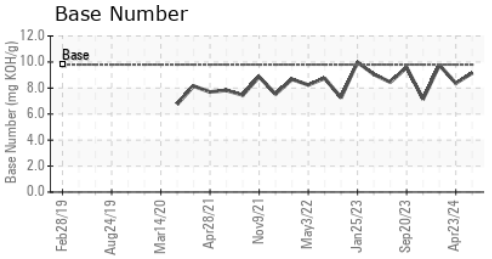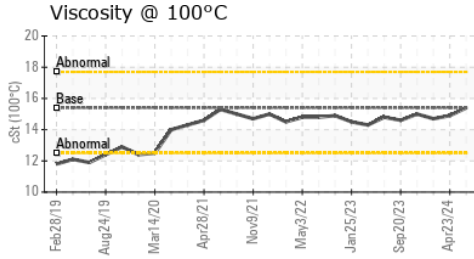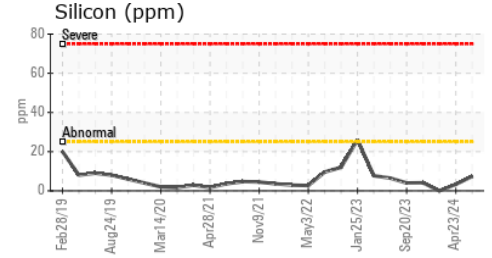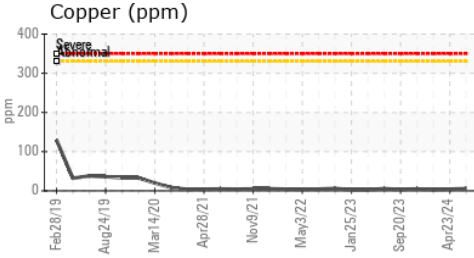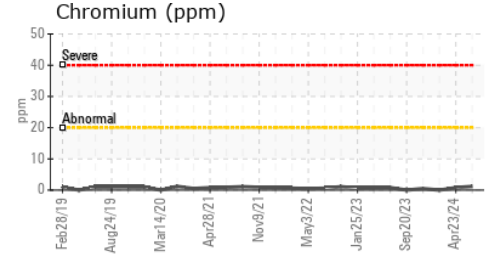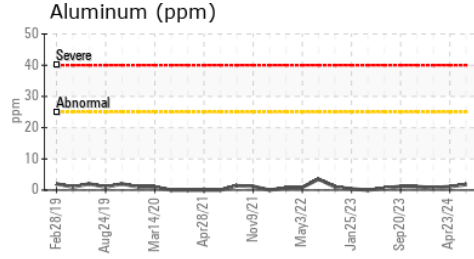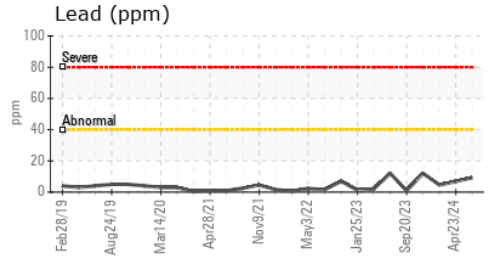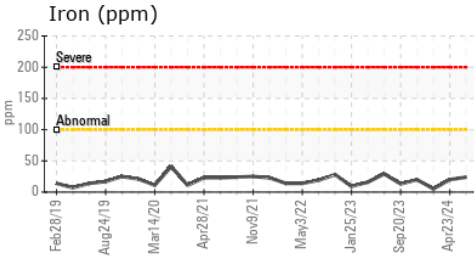

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0122718      **Received** : 08 Jul 2024  
**Lab Number** : 06230388      **Tested** : 09 Jul 2024  
**Unique Number** : 11113881      **Diagnosed** : 10 Jul 2024 - Don Baldrige  
**Test Package** : MOB 2

**G LOPES CONSTRUCTION**  
 565 WINTHROP ST  
 TAUNTON, MA  
 US 02780  
 Contact: BUTCH MCGRATH  
 bmcgrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)