


# OIL ANALYSIS REPORT



Area  
**KEMP QUARRIES / PRYOR STONE [70214]**  
 Machine Id  
**OHT085**  
 Component  
**Rear Differential**  
 Fluid  
**PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)**

### Sample Rating Trend

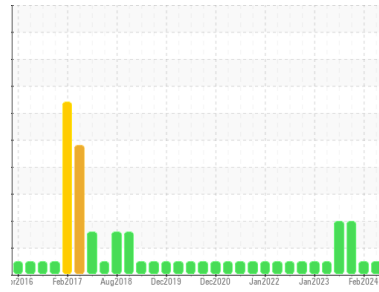

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Pm2 performed. All oil samples taken. Engine oil, transmission oil, and all filters changed. )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0108874</b>	PCA0086333	PCA0084310
Sample Date	Client Info		<b>24 Jun 2024</b>	19 Feb 2024	03 Nov 2023
Machine Age	hrs	Client Info	<b>15404</b>	14934	14433
Oil Age	hrs	Client Info	<b>971</b>	501	2162
Oil Changed	Client Info		<b>Oil Added</b>	Oil Added	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ATTENTION

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>41</b>	14	20
Chromium	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m >3	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>2</b>	2	0
Lead	ppm	ASTM D5185m >13	<b>1</b>	<1	0
Copper	ppm	ASTM D5185m >103	<b>8</b>	1	<1
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>0</b>	0	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m 9	<b>8</b>	5	0
Calcium	ppm	ASTM D5185m 3114	<b>1973</b>	1157	395
Phosphorus	ppm	ASTM D5185m 1099	<b>792</b>	533	418
Zinc	ppm	ASTM D5185m 1245	<b>897</b>	657	513
Sulfur	ppm	ASTM D5185m 7086	<b>3882</b>	2048	1198


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >100	<b>20</b>	11	6
Sodium	ppm	ASTM D5185m	<b>2</b>	0	<1
Potassium	ppm	ASTM D5185m >20	<b>1</b>	1	0

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT








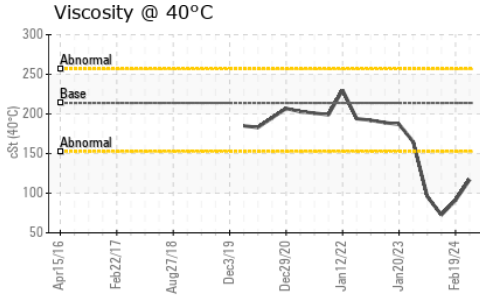


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	213.9	<b>117</b>	91.1	● 72.62

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

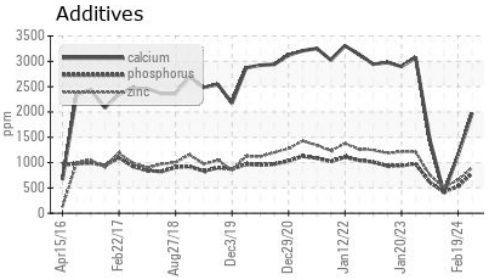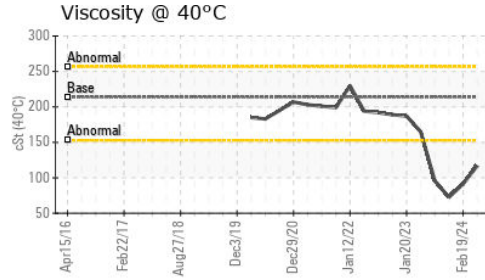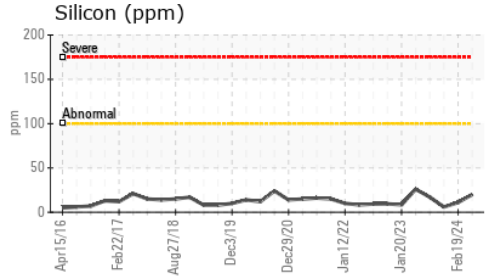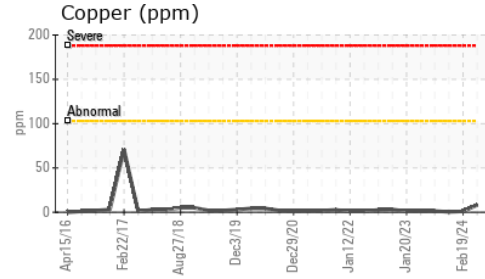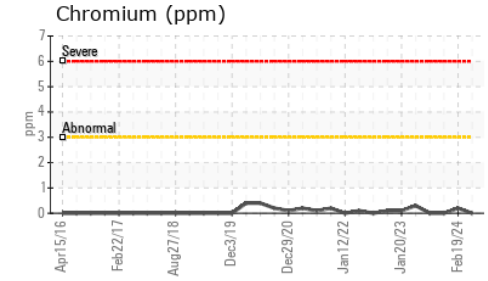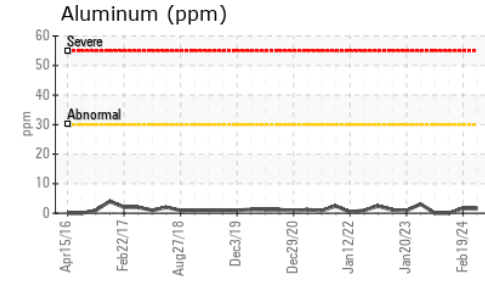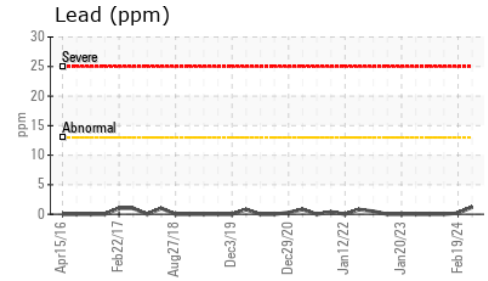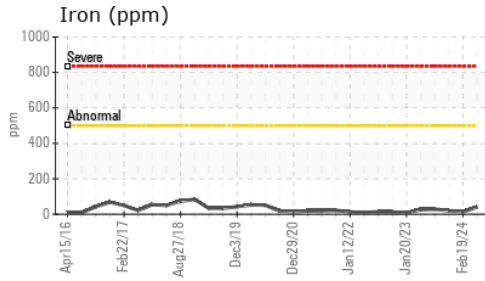

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0108874  
**Lab Number** : 06230592  
**Unique Number** : 11114085  
**Test Package** : MOB 1

**Kemp Quarries - Pryor Stone - Pryor**  
 1050 E 520 Rd  
 Pryor, OK  
 US 74361  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

pryor@pryorstone.com

T:

F: