


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

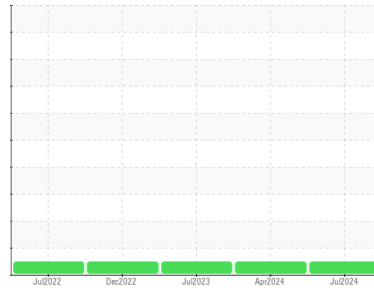

Area  
**(89649X) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A69070**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0128162</b>	PCA0123379	PCA0101028
Sample Date	Client Info	<b>02 Jul 2024</b>	10 Apr 2024	14 Jul 2023
Machine Age	mls Client Info	<b>749063</b>	722332	660338
Oil Age	mls Client Info	<b>26731</b>	61994	33638
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	0.0

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>65</b>	43	68
Chromium	ppm ASTM D5185m >5	<b>3</b>	2	3
Nickel	ppm ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m >30	<b>27</b>	19	25
Lead	ppm ASTM D5185m >30	<b>0</b>	0	0
Copper	ppm ASTM D5185m >150	<b>6</b>	5	8
Tin	ppm ASTM D5185m >5	<b>0</b>	1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>4</b>	7	1
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 50	<b>68</b>	66	80
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	1
Magnesium	ppm ASTM D5185m 950	<b>924</b>	856	1032
Calcium	ppm ASTM D5185m 1050	<b>1406</b>	1228	1283
Phosphorus	ppm ASTM D5185m 995	<b>1070</b>	1046	1103
Zinc	ppm ASTM D5185m 1180	<b>1272</b>	1215	1331
Sulfur	ppm ASTM D5185m 2600	<b>2963</b>	2869	3225

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>9</b>	9	9
Sodium	ppm ASTM D5185m	<b>28</b>	26	142
Potassium	ppm ASTM D5185m >20	<b>33</b>	32	160




### INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>1.7</b>	1.3	1.3
Nitration	Abs/cm *ASTM D7624 >20	<b>14.5</b>	12.0	12.5
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>30.8</b>	27.3	26.4

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>28.8</b>	23.9	22.1
Base Number (BN)	mg KOH/g ASTM D2896	<b>2.9</b>	4.2	4.6





# OIL ANALYSIS REPORT

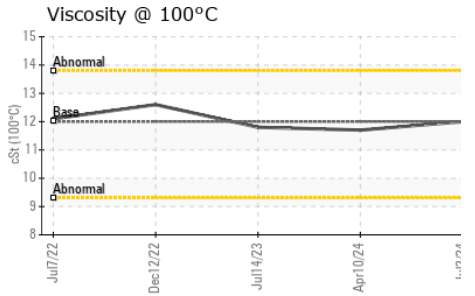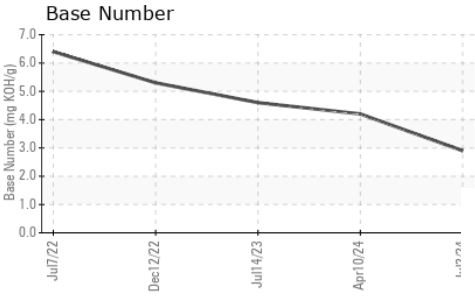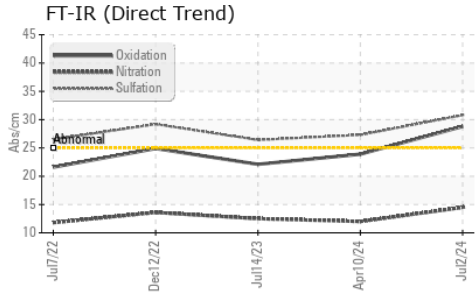

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	12.0	11.7

## GRAPHS

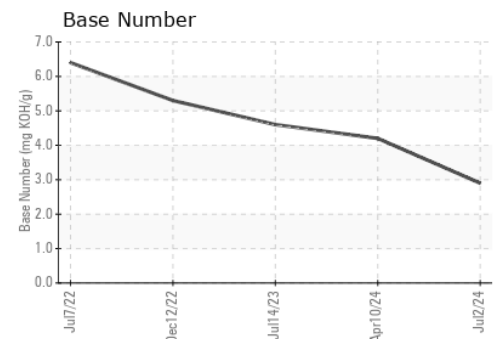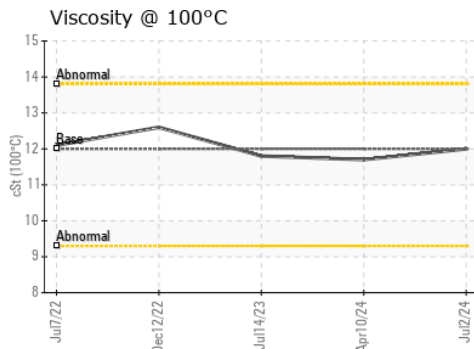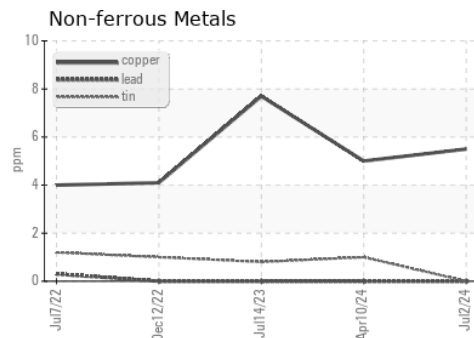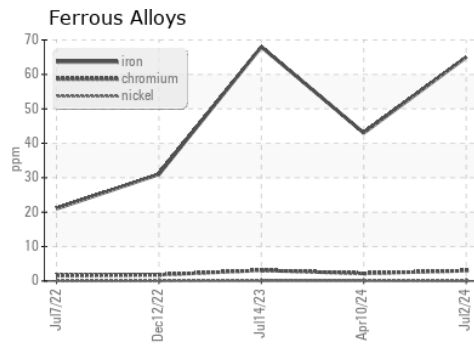

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0128162      **Received** : 08 Jul 2024  
**Lab Number** : 06230980      **Tested** : 10 Jul 2024  
**Unique Number** : 11114473      **Diagnosed** : 10 Jul 2024 - Sean Felton  
**Test Package** : FLEET

**Transervice - Shop 1373 - Berkeley-Anderson/Pendergrass**  
 101 Alliance Parkway  
 Williamston, SC  
 US 29697  
 Contact: Sonny Boucher  
 sboucher@transervice.com  
 T: (864)226-2304  
 F: (864)226-2329

To discuss this sample report, CONTACT Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)