


OIL ANALYSIS REPORT

(69962Z) Walgreens - Tractor [Walgreens - Tractor] 136A624249

Diesel Engine

PETRO CANADA DURON SHP 10W30 (11 G





DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

GAL)				Jun2024		
SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0121298		
Sample Date		Client Info		20 Jun 2024		
Machine Age	mls	Client Info		55167		
Oil Age	mls	Client Info		55167		
Oil Changed	0	Client Info		Changed		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	89		
Chromium	ppm	ASTM D5185m	>5	6		
Nickel	ppm	ASTM D5185m	>2	<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>3	<1		
Aluminum	ppm	ASTM D5185m	>30	87		
Lead	ppm	ASTM D5185m	>30	2		
Copper	ppm	ASTM D5185m	>150	239		
Tin	ppm	ASTM D5185m	>5	5		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	19		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum	ppm	ASTM D5185m	50	46		
Manganese	ppm	ASTM D5185m	0	5		
Magnesium	ppm	ASTM D5185m	950	605		
Calcium	ppm	ASTM D5185m	1050	1855		
Phosphorus	ppm	ASTM D5185m	995	785		
Zinc	ppm	ASTM D5185m	1180	922		
Sulfur	ppm	ASTM D5185m	2600	2133		
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	9		
Sodium	ppm	ASTM D5185m		10		
Potassium	ppm	ASTM D5185m	>20	221		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6		
Nitration	Abs/cm	*ASTM D7624	>20	11.3		
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.4		
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	24.9		
Base Number (BN)	mg KOH/g	ASTM D2896		6.4		



OIL ANALYSIS REPORT

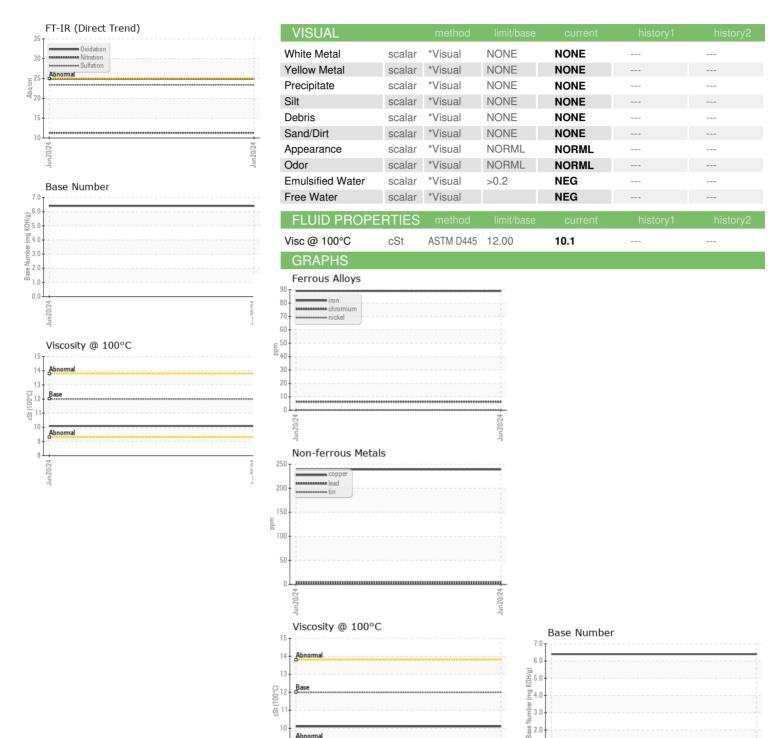





Certificate 12367

Laboratory Sample No.

Lab Number : 06230992 Unique Number : 11114485 Test Package : FLEET

: PCA0121298

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 08 Jul 2024

Tested : 10 Jul 2024

Diagnosed : 10 Jul 2024 - Sean Felton

0.0

Transervice - Shop 1369 - Berkeley-Waxahachie 710 Ovilla Road Waxahachie, TX US 75167

Contact: Robert Beal To discuss this sample report, contact Customer Service at 1-800-237-1369. rbeal@transervice.com st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (972)923-9928

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) Report Id: TSV1369 [WUSCAR] 06230992 (Generated: 07/10/2024 14:57:41) Rev: 1

Contact/Location: Robert Beal - TSV1369

F: (972)923-9919