


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

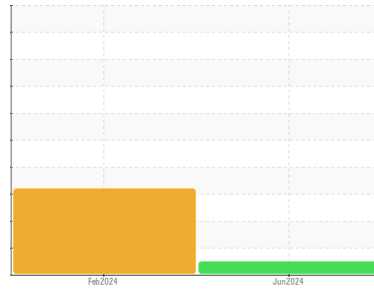

Area  
**(89785X) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A69029**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2 |
|---------------|-------------|-------------|--------------------|-------------|----------|
| Sample Number | Client Info |             | <b>PCA0121300</b>  | PCA0120857  | ---      |
| Sample Date   | Client Info |             | <b>24 Jun 2024</b> | 05 Feb 2024 | ---      |
| Machine Age   | mls         | Client Info | <b>597532</b>      | 574437      | ---      |
| Oil Age       | mls         | Client Info | <b>40000</b>       | 60000       | ---      |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Changed     | ---      |
| Sample Status |             |             | <b>NORMAL</b>      | ABNORMAL    | ---      |

### CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >5         | <b>&lt;1.0</b> | <1.0     | ---      |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | ---      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | ---      |

### WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >80  | <b>27</b>    | ▲ 81     | ---      |
| Chromium | ppm    | ASTM D5185m >5   | <b>2</b>     | 5        | ---      |
| Nickel   | ppm    | ASTM D5185m >2   | <b>0</b>     | <1       | ---      |
| Titanium | ppm    | ASTM D5185m      | <b>0</b>     | <1       | ---      |
| Silver   | ppm    | ASTM D5185m >3   | <b>&lt;1</b> | <1       | ---      |
| Aluminum | ppm    | ASTM D5185m >30  | <b>13</b>    | ● 18     | ---      |
| Lead     | ppm    | ASTM D5185m >30  | <b>0</b>     | <1       | ---      |
| Copper   | ppm    | ASTM D5185m >150 | <b>12</b>    | 16       | ---      |
| Tin      | ppm    | ASTM D5185m >5   | <b>0</b>     | 2        | ---      |
| Vanadium | ppm    | ASTM D5185m      | <b>0</b>     | <1       | ---      |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | 0        | ---      |

### ADDITIVES

|            | method | limit/base       | current      | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 2    | <b>&lt;1</b> | 0        | ---      |
| Barium     | ppm    | ASTM D5185m 0    | <b>0</b>     | 0        | ---      |
| Molybdenum | ppm    | ASTM D5185m 50   | <b>61</b>    | 89       | ---      |
| Manganese  | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | 1        | ---      |
| Magnesium  | ppm    | ASTM D5185m 950  | <b>1017</b>  | 1448     | ---      |
| Calcium    | ppm    | ASTM D5185m 1050 | <b>1213</b>  | 1616     | ---      |
| Phosphorus | ppm    | ASTM D5185m 995  | <b>1102</b>  | 1493     | ---      |
| Zinc       | ppm    | ASTM D5185m 1180 | <b>1303</b>  | 1877     | ---      |
| Sulfur     | ppm    | ASTM D5185m 2600 | <b>3448</b>  | 3907     | ---      |

### CONTAMINANTS

|           | method | limit/base      | current  | history1 | history2 |
|-----------|--------|-----------------|----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >20 | <b>6</b> | ▲ 25     | ---      |
| Sodium    | ppm    | ASTM D5185m     | <b>2</b> | 4        | ---      |
| Potassium | ppm    | ASTM D5185m >20 | <b>8</b> | 6        | ---      |




### INFRA-RED

|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >3  | <b>0.5</b>  | 0.8      | ---      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>8.7</b>  | 10.8     | ---      |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>19.9</b> | 23.9     | ---      |

### FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>16.4</b> | 21.4     | ---      |
| Base Number (BN) | mg KOH/g | ASTM D2896      | <b>7.4</b>  | 4.5      | ---      |





# OIL ANALYSIS REPORT

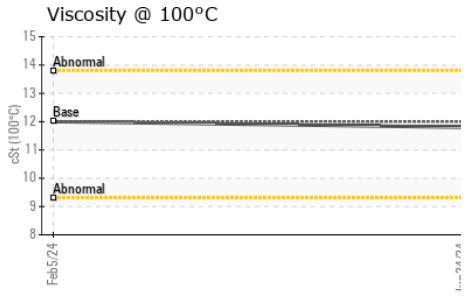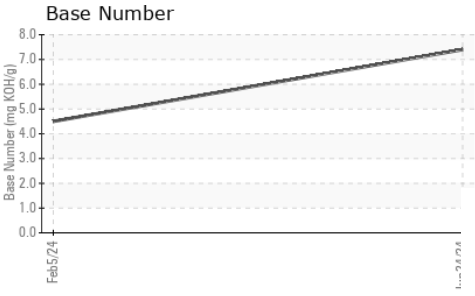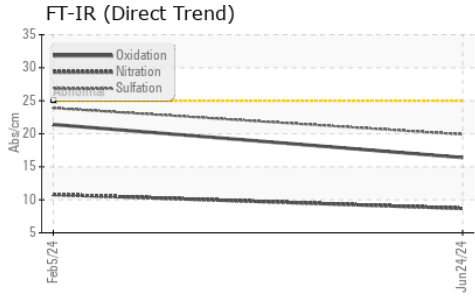

| PARAMETER        | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | ---      |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | ---      |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | ---      |
| Silt             | scalar | *Visual    | NONE    | NONE     | ---      |
| Debris           | scalar | *Visual    | NONE    | NONE     | ---      |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | ---      |
| Appearance       | scalar | *Visual    | NORML   | NORML    | ---      |
| Odor             | scalar | *Visual    | NORML   | NORML    | ---      |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | ---      |
| Free Water       | scalar | *Visual    |         | NEG      | ---      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 12.00   | 11.8     | 12.0     |

## GRAPHS

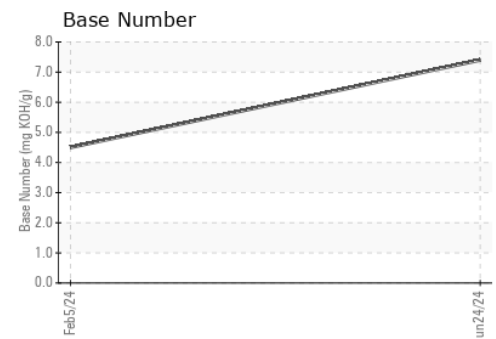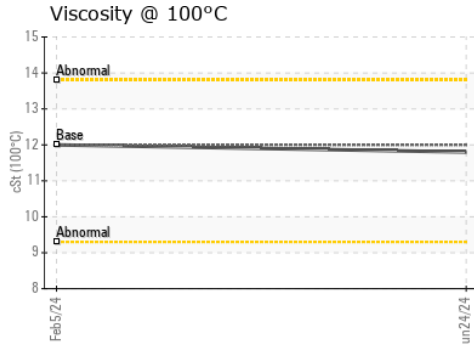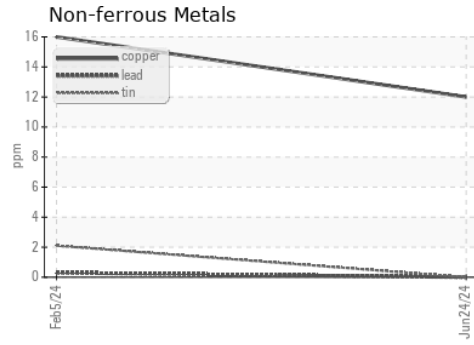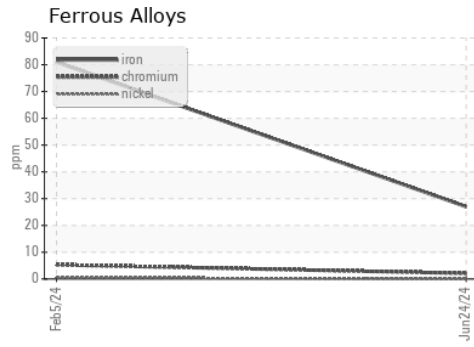

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0121300  
**Lab Number** : 06230995  
**Unique Number** : 11114488  
**Test Package** : FLEET

**Received** : 08 Jul 2024  
**Tested** : 10 Jul 2024  
**Diagnosed** : 10 Jul 2024 - Wes Davis

**Transervice - Shop 1369 - Berkeley-Waxahachie**  
 710 Ovilla Road  
 Waxahachie, TX  
 US 75167

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Robert Beal  
 rbeal@transervice.com  
 T: (972)923-9928  
 F: (972)923-9919