


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

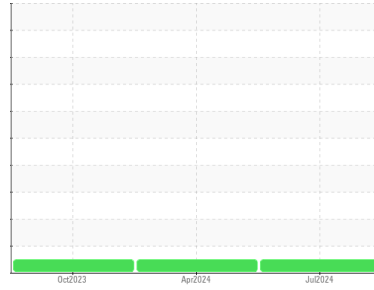

Area  
**(15590Z) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A61254**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>PCA0129472</b>	PCA0093895	PCA0093864	
Sample Date	Client Info	<b>03 Jul 2024</b>	03 Apr 2024	02 Oct 2023	
Machine Age	mls	Client Info	<b>414707</b>	403824	360439
Oil Age	mls	Client Info	<b>0</b>	403824	0
Oil Changed	Client Info	<b>Changed</b>	Not Changd	N/A	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

### CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>12</b>	10	17
Chromium	ppm ASTM D5185m >5	<b>2</b>	1	2
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>1</b>	2	<1
Silver	ppm ASTM D5185m >3	<b>&lt;1</b>	<1	0
Aluminum	ppm ASTM D5185m >30	<b>8</b>	9	10
Lead	ppm ASTM D5185m >30	<b>0</b>	0	<1
Copper	ppm ASTM D5185m >150	<b>2</b>	<1	89
Tin	ppm ASTM D5185m >5	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>6</b>	8	8
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 50	<b>63</b>	63	64
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 950	<b>983</b>	919	972
Calcium	ppm ASTM D5185m 1050	<b>1196</b>	1078	1207
Phosphorus	ppm ASTM D5185m 995	<b>1067</b>	1014	982
Zinc	ppm ASTM D5185m 1180	<b>1268</b>	1211	1282
Sulfur	ppm ASTM D5185m 2600	<b>3514</b>	3357	2449

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>4</b>	4	4
Sodium	ppm ASTM D5185m	<b>2</b>	1	1
Potassium	ppm ASTM D5185m >20	<b>12</b>	14	23




### INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.5</b>	0.4	0.5
Nitration	Abs/cm *ASTM D7624 >20	<b>7.6</b>	6.7	7.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.4</b>	18.4	19.7

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.1</b>	13.8	16.6
Base Number (BN)	mg KOH/g ASTM D2896	<b>7.3</b>	8.0	7.6





# OIL ANALYSIS REPORT

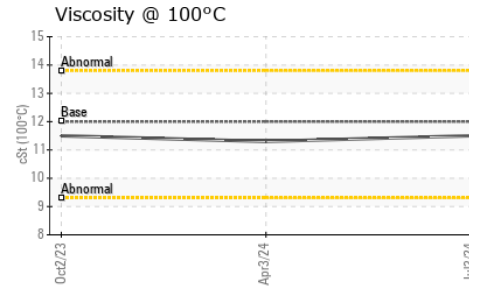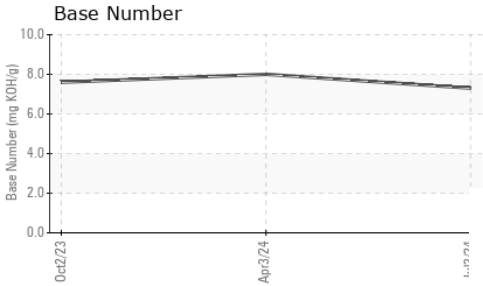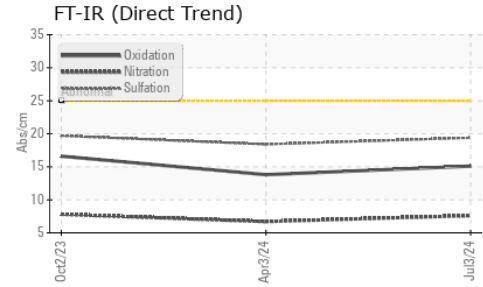

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.5	11.3

## GRAPHS

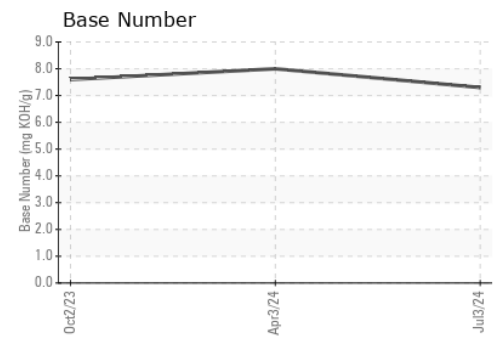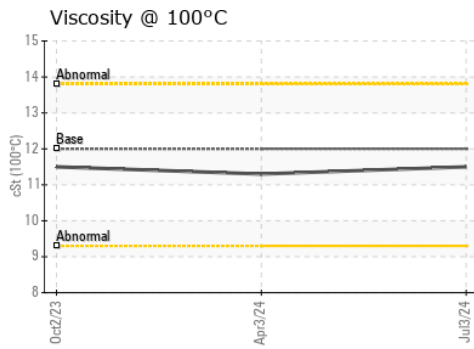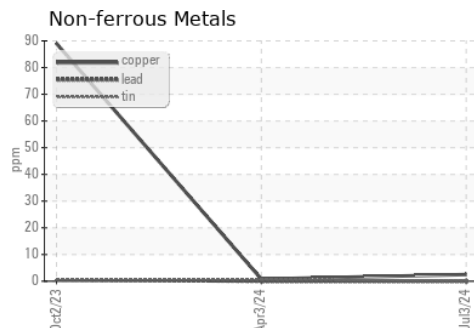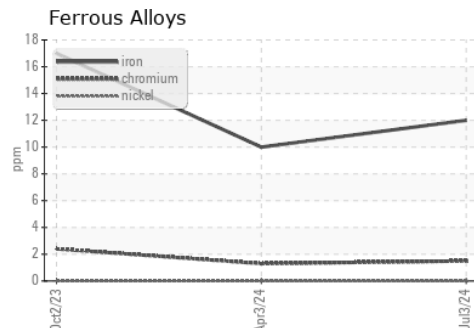

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0129472      **Received** : 08 Jul 2024  
**Lab Number** : **06231014**      **Tested** : 10 Jul 2024  
**Unique Number** : 11114507      **Diagnosed** : 10 Jul 2024 - Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1372 - Berkeley-Moreno Valley**  
 17500 Perris Blvd.  
 Moreno Valley, CA  
 US 92551  
 Contact: Ryan Cruz  
 rcruz@transervice.com  
 T: (951)924-7131  
 F: (951)924-7151

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)