




# OIL ANALYSIS REPORT

## Sample Rating Trend

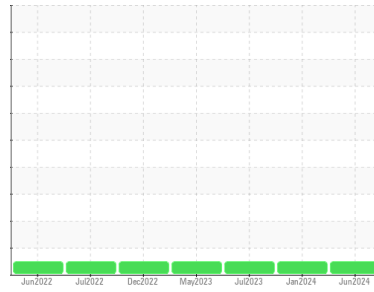

**NORMAL**



Machine Id

**220028**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0095337</b>	GFL0095366	GFL0076928
Sample Date	Client Info		<b>29 Jun 2024</b>	12 Jan 2024	24 Jul 2023
Machine Age	hrs	Client Info	<b>6556</b>	6161	5756
Oil Age	hrs	Client Info	<b>395</b>	412	238
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>39</b>	32	15
Chromium	ppm	ASTM D5185m >4	<b>2</b>	2	1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>11</b>	7	5
Lead	ppm	ASTM D5185m >45	<b>2</b>	1	<1
Copper	ppm	ASTM D5185m >85	<b>&lt;1</b>	1	<1
Tin	ppm	ASTM D5185m >4	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>8</b>	11	8
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>60</b>	59	60
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>1024</b>	923	905
Calcium	ppm	ASTM D5185m 1070	<b>1220</b>	1147	1117
Phosphorus	ppm	ASTM D5185m 1150	<b>1110</b>	1014	993
Zinc	ppm	ASTM D5185m 1270	<b>1325</b>	1237	1208
Sulfur	ppm	ASTM D5185m 2060	<b>3638</b>	2987	3239

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>7</b>	9	5
Sodium	ppm	ASTM D5185m	<b>5</b>	4	3
Potassium	ppm	ASTM D5185m >20	<b>13</b>	8	4

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	0.3	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.8</b>	9.4	7.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.7</b>	19.6	19.1


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.9</b>	15.8	14.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.5</b>	7.2	8.2




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

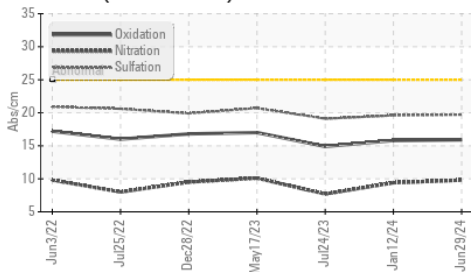

Base Number

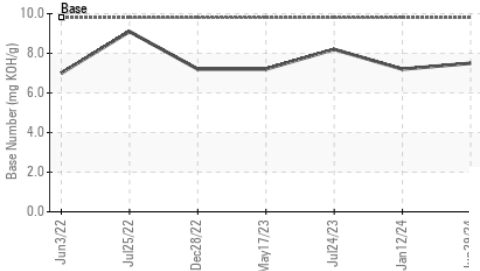

Viscosity @ 100°C

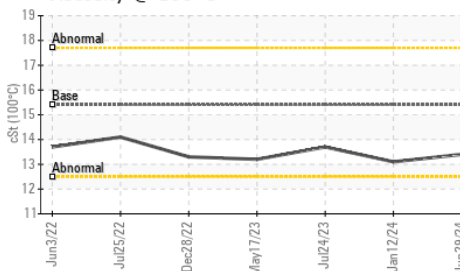


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.4	13.1

## GRAPHS


Ferrous Alloys

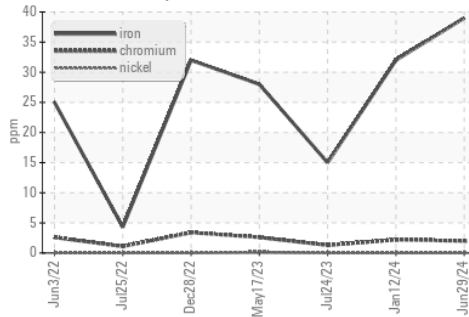


Non-ferrous Metals

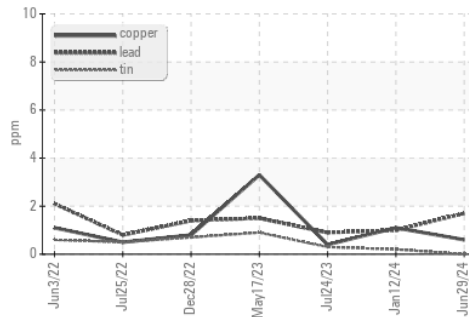

Viscosity @ 100°C

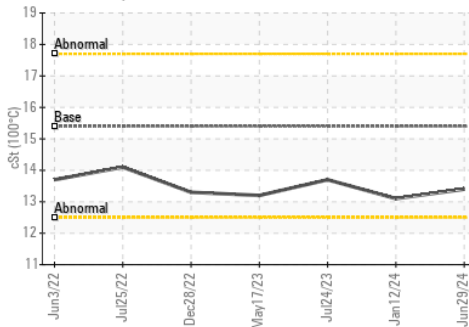

Base Number

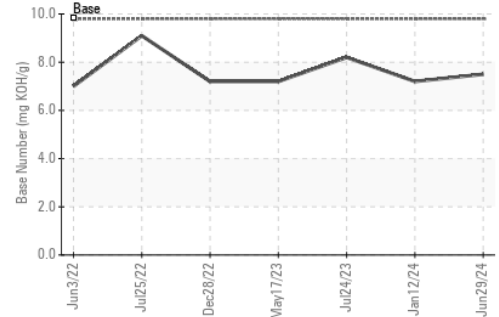

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0095337  
 Lab Number : 06231114  
 Unique Number : 11114607  
 Test Package : FLEET

Received : 08 Jul 2024  
 Tested : 10 Jul 2024  
 Diagnosed : 10 Jul 2024 - Wes Davis

GFL Environmental - 930 - Mosinee HC  
 1372 State Highway 34  
 MOSINEE, WI  
 US 54455  
 Contact: Kirk Koss

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (715)571-2784

F: