




# OIL ANALYSIS REPORT

Sample Rating Trend

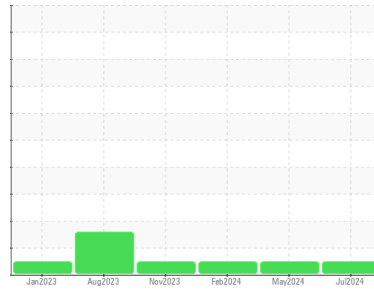

**NORMAL**



Machine Id  
**427191 - SW4738**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0123515</b>	GFL0112046	GFL0105482
Sample Date	Client Info	<b>02 Jul 2024</b>	10 May 2024	01 Feb 2024
Machine Age	mls Client Info	<b>375801</b>	360673	360673
Oil Age	mls Client Info	<b>375801</b>	360673	360673
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>11</b>	16	24
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	2	2
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	1	1
Titanium	ppm ASTM D5185m	<b>0</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>&lt;1</b>	<1	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	2	3
Lead	ppm ASTM D5185m >40	<b>3</b>	3	3
Copper	ppm ASTM D5185m >330	<b>5</b>	10	25
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	2	1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>0</b>	0	3
Barium	ppm ASTM D5185m 0	<b>0</b>	0	3
Molybdenum	ppm ASTM D5185m 60	<b>48</b>	56	70
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	1	<1
Magnesium	ppm ASTM D5185m 1010	<b>12</b>	35	22
Calcium	ppm ASTM D5185m 1070	<b>2508</b>	2600	2909
Phosphorus	ppm ASTM D5185m 1150	<b>1118</b>	1207	1227
Zinc	ppm ASTM D5185m 1270	<b>1295</b>	1339	1549
Sulfur	ppm ASTM D5185m 2060	<b>3653</b>	3888	3981

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>8</b>	11	17
Sodium	ppm ASTM D5185m	<b>4</b>	3	6
Potassium	ppm ASTM D5185m >20	<b>2</b>	4	2

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.2</b>	0.2	0.2
Nitration	Abs/cm *ASTM D7624 >20	<b>7.1</b>	7.3	7.7
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>17.0</b>	17.6	18.4


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>9.7</b>	9.8	10.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.4</b>	7.2	6.7




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

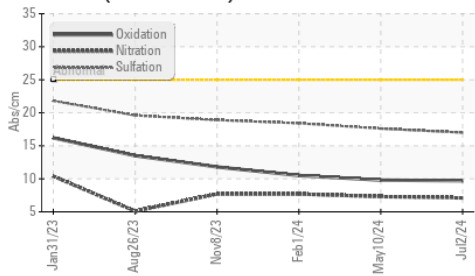

Base Number

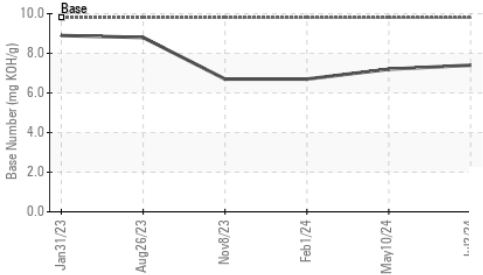

Viscosity @ 100°C

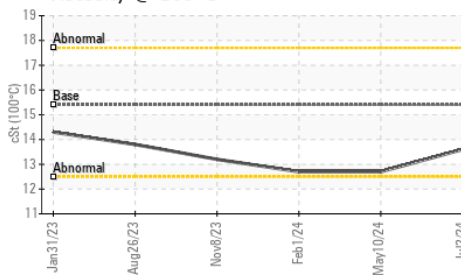


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.6	12.7

## GRAPHS


Ferrous Alloys

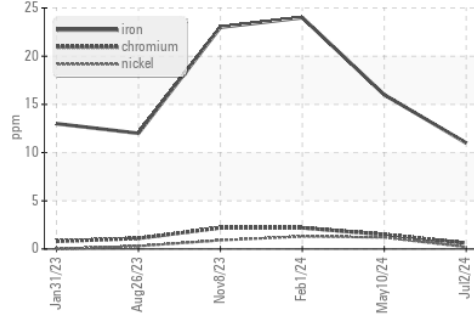


Non-ferrous Metals

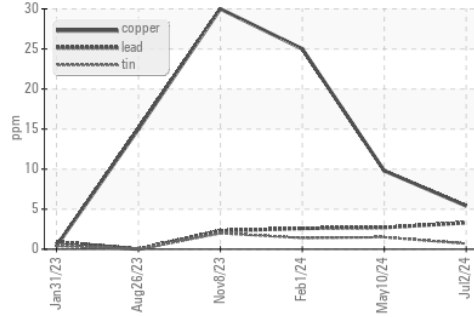

Viscosity @ 100°C

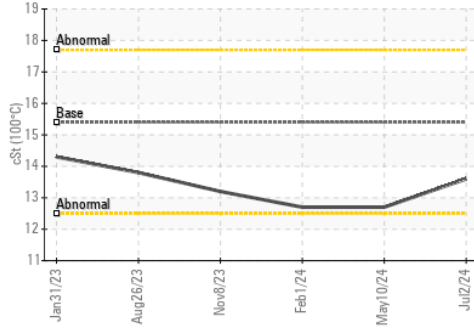

Base Number

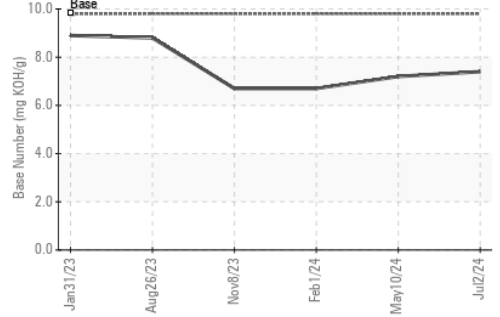

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0123515      **Received** : 09 Jul 2024  
**Lab Number** : 06231202      **Tested** : 10 Jul 2024  
**Unique Number** : 11114695      **Diagnosed** : 10 Jul 2024 - Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 983 - Sugar Land Hauling**  
 16011 West Belfort Street  
 Sugar Land, TX  
 US 77498  
 Contact: Adrian Martinez  
 adrianmartinez@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)