




OIL ANALYSIS REPORT

Sample Rating Trend

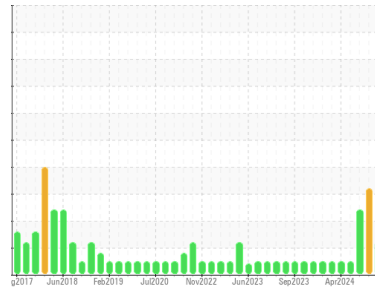

FUEL



Machine Id

10482

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (13 GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0122157	GFL0122202	GFL0122182
Sample Date	Client Info	08 Jul 2024	12 Jun 2024	28 May 2024
Machine Age	hrs	859	677	545
Oil Age	hrs	604	422	290
Oil Changed	Client Info	Changed	Not Changd	Not Changd
Sample Status		ABNORMAL	SEVERE	SEVERE

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>100	22	11	7
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	3	2
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	<1	<1	0
Tin	ppm	ASTM D5185m	>15	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	2	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	3	8	6
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	59	58	56
Manganese	ppm	ASTM D5185m	0	0	1	0
Magnesium	ppm	ASTM D5185m	1010	814	774	782
Calcium	ppm	ASTM D5185m	1070	1063	982	920
Phosphorus	ppm	ASTM D5185m	1150	966	869	860
Zinc	ppm	ASTM D5185m	1270	1153	1088	1028
Sulfur	ppm	ASTM D5185m	2060	3054	2984	2836

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	7	7	4
Sodium	ppm	ASTM D5185m		15	11	6
Potassium	ppm	ASTM D5185m	>20	1	4	0
Fuel	%	ASTM D3524	>5	▲ 5.1	0.5	▲ 14.0

INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	1.4	0.9	0.5
Nitration	Abs/cm	*ASTM D7624	>20	9.4	13.5	8.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.2	13.7	18.5


FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.8	17.2	13.7
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.0	15.8	7.5




OIL ANALYSIS REPORT


▲ Fuel Dilution

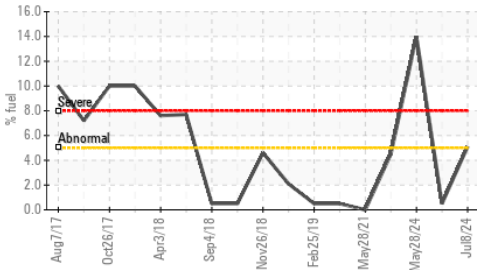


● FT-IR (Direct Trend)

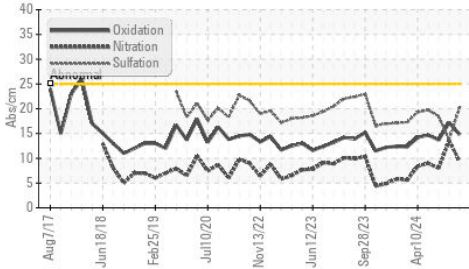

● FT-IR (Direct Trend)

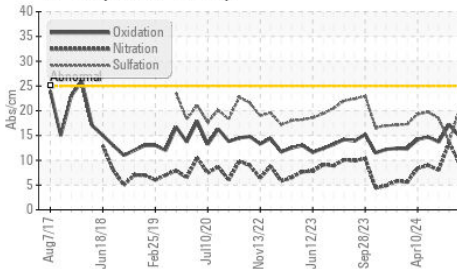

Base Number

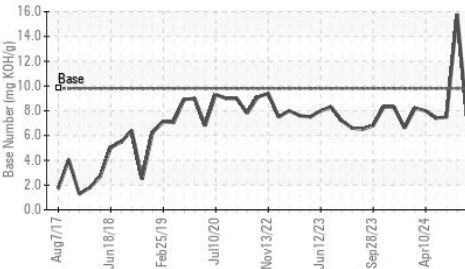


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	0.2%
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 12.1	--- ▲ 11.2

GRAPHS


Ferrous Alloys

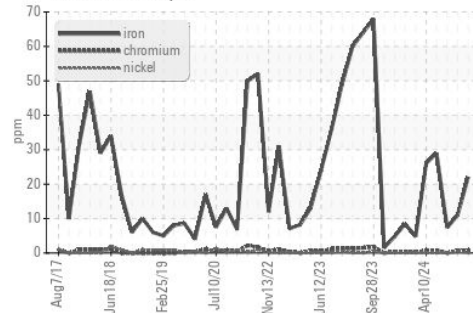


Non-ferrous Metals

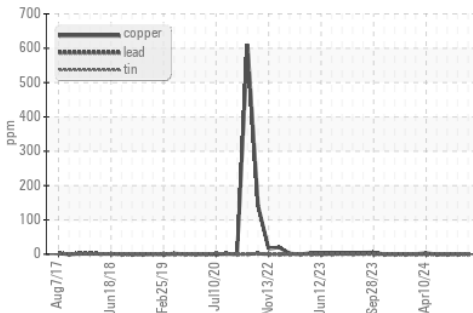

▲ Viscosity @ 100°C

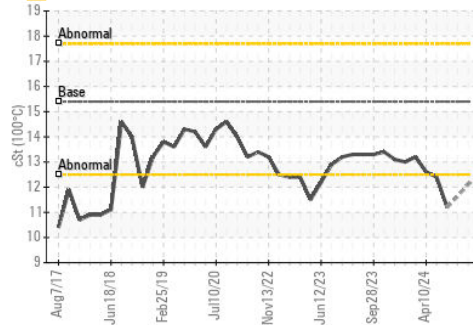

Base Number

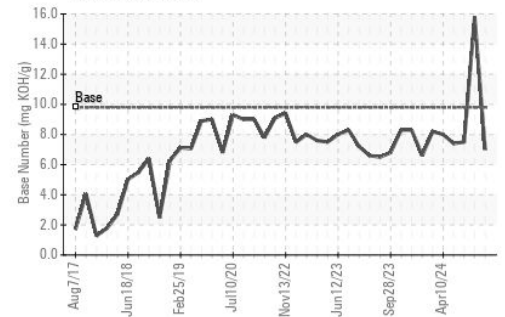

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0122157

Lab Number : 06231321

Unique Number : 11114814

Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 09 Jul 2024

Tested : 11 Jul 2024

Diagnosed : 11 Jul 2024 - Wes Davis

GFL Environmental - 010 - Stockbridge

1280 Rum Creek Parkway

Stockbridge, GA

US 30281

Contact: JOSHUA TINKER

joshuatinker@gflenv.com

T:

F: