




# OIL ANALYSIS REPORT

## Sample Rating Trend

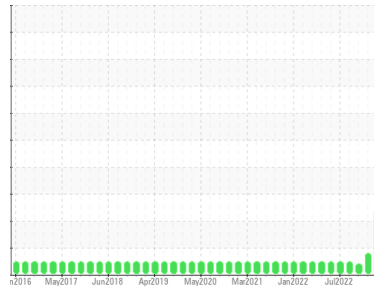

COOL CHEMICALS



Machine Id  
**2602C PETERBILT 567**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (48 QTS)**

## DIAGNOSIS

### Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0127902</b>	GFL0094741	GFL0089305
Sample Date	Client Info	<b>09 Jul 2024</b>	31 Jan 2024	21 Jul 2023
Machine Age	mls	<b>309487</b>	22156	20948
Oil Age	mls	<b>287331</b>	1208	1052
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	<b>&gt;0.1</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>50	<b>22</b>	23	11
Chromium	ppm	ASTM D5185m	>4	<b>2</b>	2	2
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>9	<b>4</b>	6	3
Lead	ppm	ASTM D5185m	>30	<b>28</b>	▲ 56	19
Copper	ppm	ASTM D5185m	>35	<b>4</b>	8	5
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	50	<b>11</b>	13	11
Barium	ppm	ASTM D5185m	5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>62</b>	57	56
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	560	<b>594</b>	645	528
Calcium	ppm	ASTM D5185m	1510	<b>1667</b>	1826	1759
Phosphorus	ppm	ASTM D5185m	780	<b>795</b>	884	722
Zinc	ppm	ASTM D5185m	870	<b>1016</b>	1106	984
Sulfur	ppm	ASTM D5185m	2040	<b>3035</b>	2655	2949

## CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>+100	<b>14</b>	19	17
Sodium	ppm	ASTM D5185m		▲ <b>54</b>	14	9
Potassium	ppm	ASTM D5185m	>20	▲ <b>518</b>	2	2

## INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844		<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>12.6</b>	12.8	11.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>25.9</b>	29.6	25.1


## FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>23.6</b>	27.3	21.8
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	<b>3.5</b>	2.6	3.9




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

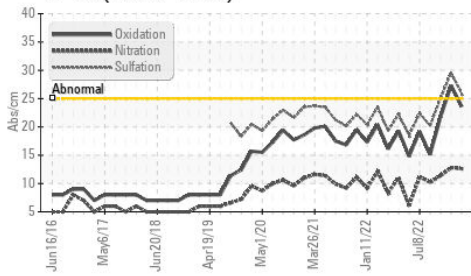


Glycol Contamination

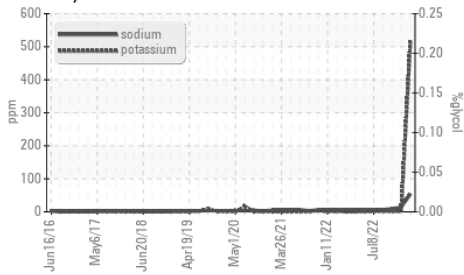

Viscosity @ 100°C

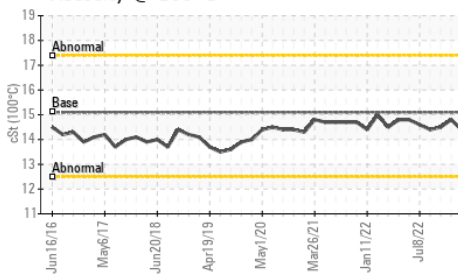

Glycol Contamination

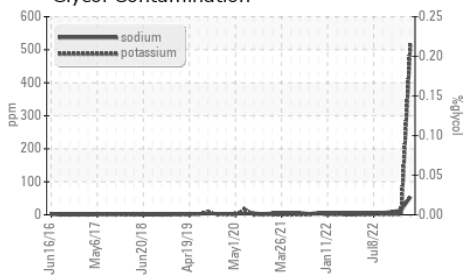


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.4	14.8

## GRAPHS


Ferrous Alloys

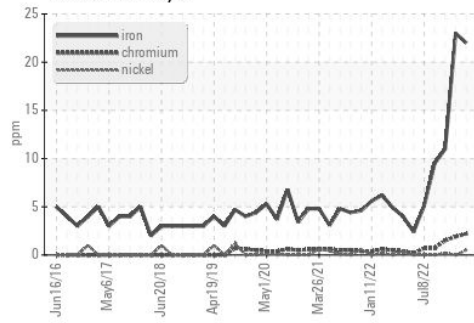


Non-ferrous Metals

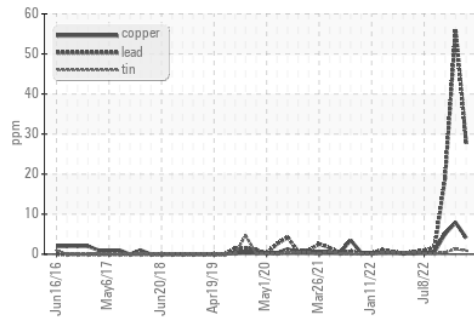

Viscosity @ 100°C

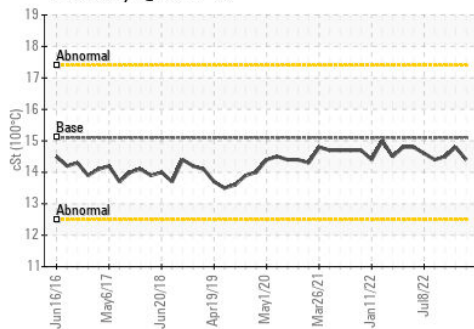

Base Number

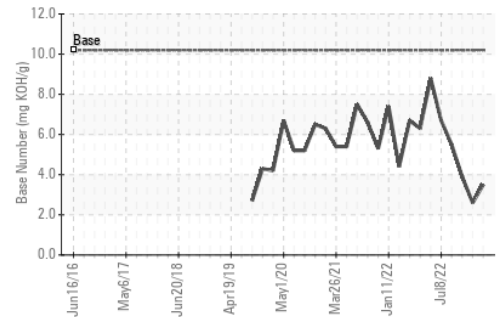

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0127902  
**Lab Number** : 06231931  
**Unique Number** : 11115424  
**Test Package** : FLEET ( Additional Tests: Glycol )  
**Received** : 10 Jul 2024  
**Tested** : 11 Jul 2024  
**Diagnosed** : 11 Jul 2024 - Jonathan Hester

**GFL Environmental - 001 - Raleigh(CNG)**  
 3741 Conquest Drive  
 Garner, NC  
 US 27529

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Craig Johnson  
 craig.johnson@gflenv.com  
 T: (919)662-7100  
 F: (919)662-7130