




# OIL ANALYSIS REPORT

Sample Rating Trend

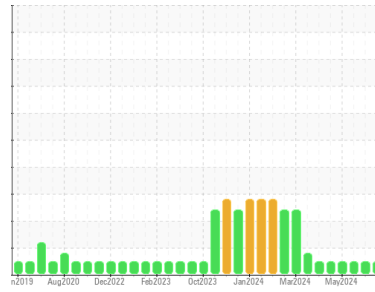

**NORMAL**



Machine Id  
**727108-310052**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0121550</b>	GFL0121541	GFL0105248
Sample Date	Client Info	<b>08 Jul 2024</b>	20 Jun 2024	10 Jun 2024
Machine Age	hrs	<b>3468</b>	3349	3215
Oil Age	hrs	<b>150</b>	150	150
Oil Changed	Client Info	<b>Not Changed</b>	Not Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >80	<b>13</b>	11	10
Chromium	ppm	ASTM D5185m >5	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >30	<b>4</b>	3	2
Lead	ppm	ASTM D5185m >30	<b>2</b>	2	<1
Copper	ppm	ASTM D5185m >150	<b>1</b>	2	1
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	<b>3</b>	<1	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m 60	<b>52</b>	53	51
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>802</b>	826	815
Calcium	ppm	ASTM D5185m 1070	<b>923</b>	952	921
Phosphorus	ppm	ASTM D5185m 1150	<b>838</b>	989	900
Zinc	ppm	ASTM D5185m 1270	<b>1046</b>	1134	1103
Sulfur	ppm	ASTM D5185m 2060	<b>2363</b>	2803	3059

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >20	<b>4</b>	4	3
Sodium	ppm	ASTM D5185m	<b>8</b>	5	5
Potassium	ppm	ASTM D5185m >20	<b>7</b>	6	2
Fuel	%	ASTM D3524 >5	<b>&lt;1.0</b>	<1.0	<1.0

## INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	0.4	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.9</b>	10.3	8.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.0</b>	20.1	18.7


## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.5</b>	18.2	16.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.8</b>	7.4	7.8




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

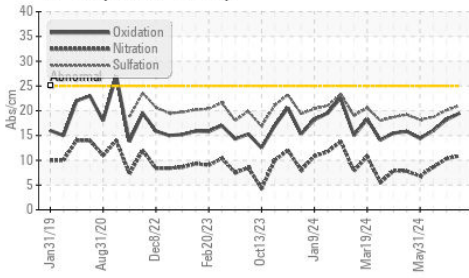


Fuel Dilution

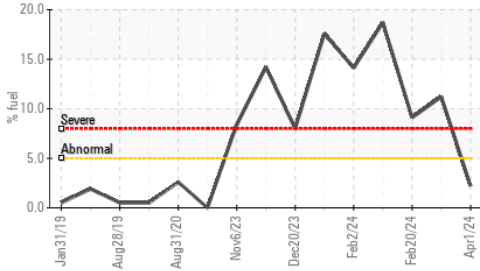

Viscosity @ 100°C

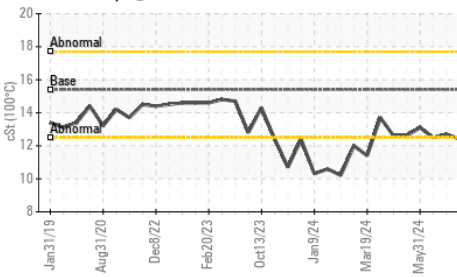

Fuel Dilution

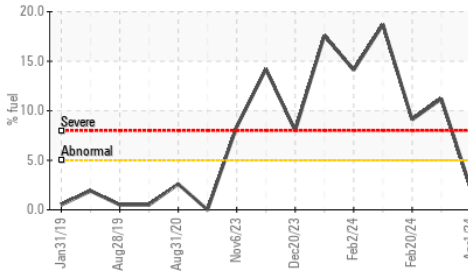


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.4	12.7

## GRAPHS


Ferrous Alloys

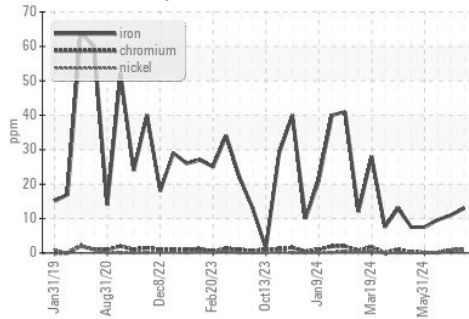


Non-ferrous Metals

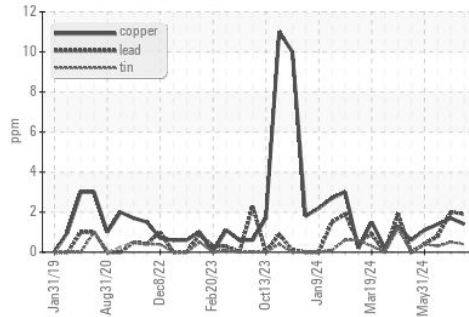

Viscosity @ 100°C

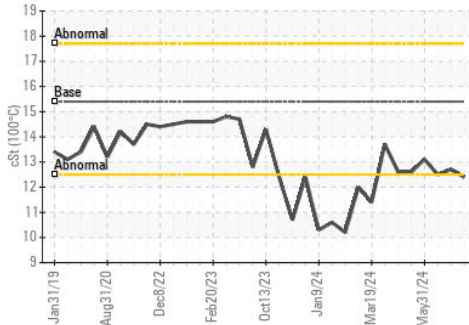

Base Number

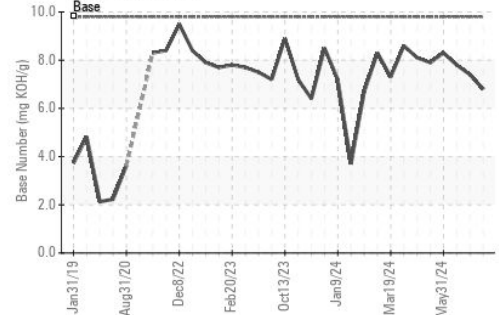

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0121550

Lab Number : 06232003

Unique Number : 11115496

Test Package : FLEET ( Additional Tests: FuelDilution, PercentFuel )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 10 Jul 2024

Tested : 12 Jul 2024

Diagnosed : 12 Jul 2024 - Sean Felton

GFL Environmental - 821 - Ozarks Hauling

33924 Olath Drive

Lebanon, MO

US 65536

Contact: Landen Johnson

landen.johnson@gflenv.com

T: (417)664-0010

F: