




# OIL ANALYSIS REPORT

## Sample Rating Trend

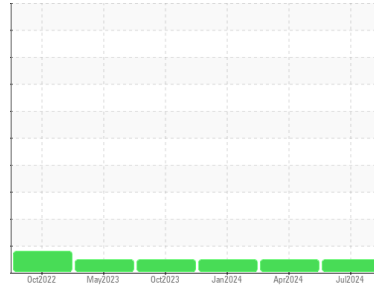

**NORMAL**



Machine Id  
**MACK LEU613 921020 (S/N 1M2AU02C7BM004733)**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0118154</b>	GFL0113953	GFL0086752
Sample Date	Client Info		<b>02 Jul 2024</b>	18 Apr 2024	02 Jan 2024
Machine Age	hrs	Client Info	<b>28597</b>	28443	27899
Oil Age	hrs	Client Info	<b>154</b>	544	523
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>5</b>	13	17
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>1</b>	0	1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	3	3
Lead	ppm	ASTM D5185m >40	<b>1</b>	<1	2
Copper	ppm	ASTM D5185m >330	<b>1</b>	2	2
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	2
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>41</b>	2	<1
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>51</b>	63	62
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>802</b>	997	1021
Calcium	ppm	ASTM D5185m 1070	<b>912</b>	1118	1102
Phosphorus	ppm	ASTM D5185m 1150	<b>1015</b>	1070	1089
Zinc	ppm	ASTM D5185m 1270	<b>1043</b>	1283	1302
Sulfur	ppm	ASTM D5185m 2060	<b>4206</b>	3367	3199

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	4	5
Sodium	ppm	ASTM D5185m	<b>4</b>	5	5
Potassium	ppm	ASTM D5185m >20	<b>4</b>	0	0

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.4</b>	1.2	1.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.2</b>	9.5	9.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.6</b>	20.7	21.3


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.9</b>	16.2	16.7
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.6</b>	8.5	8.4




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

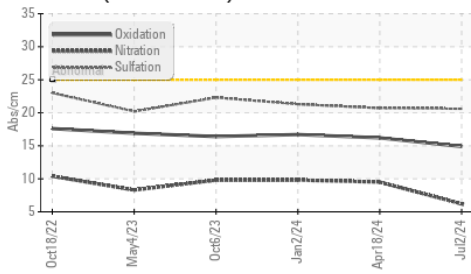

Base Number

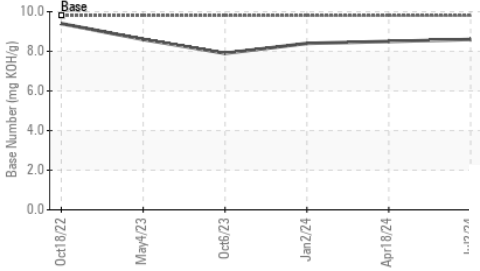

Viscosity @ 100°C

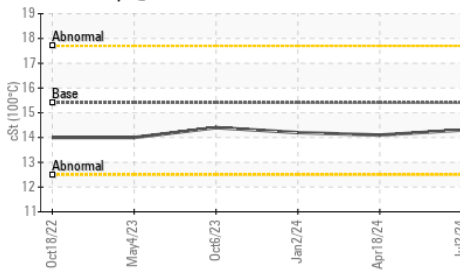


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.3	14.1

## GRAPHS


Ferrous Alloys

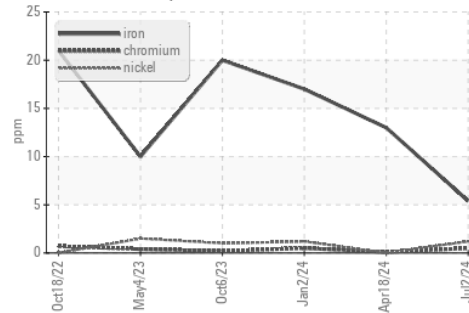


Non-ferrous Metals

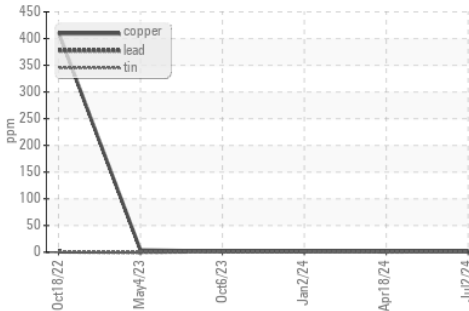

Viscosity @ 100°C

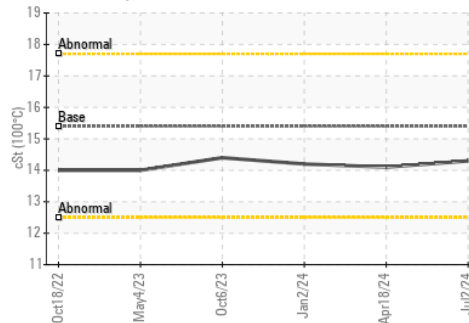

Base Number

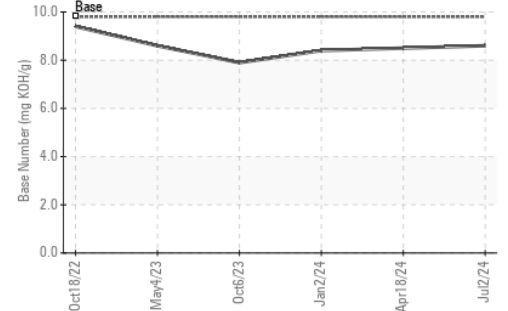

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0118154  
 Lab Number : 06232009  
 Unique Number : 11115502  
 Test Package : FLEET

Received : 10 Jul 2024  
 Tested : 10 Jul 2024  
 Diagnosed : 10 Jul 2024 - Wes Davis

GFL Environmental - 932 - Muskego HC  
 W144 S6400 College Ct.  
 Muskego, WI  
 US 53150

Contact: Brian Schломann  
 brian.schlomann@gflenv.com  
 T: (262)510-4586

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: