




# OIL ANALYSIS REPORT

Sample Rating Trend

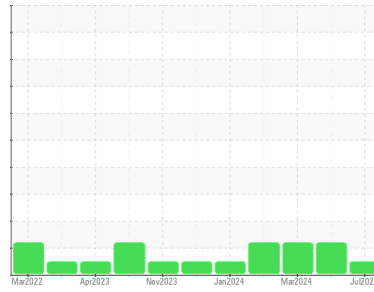

**NORMAL**



Area  
**(V16514)**  
 Machine Id  
**222046-630251**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0122563</b>	GFL0117951	GFL0111942
Sample Date	Client Info		<b>05 Jul 2024</b>	25 Apr 2024	28 Mar 2024
Machine Age	hrs	Client Info	<b>8909</b>	8774	8738
Oil Age	hrs	Client Info	<b>0</b>	600	0
Oil Changed	Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	ATTENTION	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>11</b>	31	33
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	3	2
Lead	ppm	ASTM D5185m >40	<b>2</b>	8	8
Copper	ppm	ASTM D5185m >330	<b>1</b>	2	2
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>7</b>	11	16
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>60</b>	68	73
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>924</b>	974	972
Calcium	ppm	ASTM D5185m 1070	<b>1082</b>	1109	1150
Phosphorus	ppm	ASTM D5185m 1150	<b>971</b>	1054	969
Zinc	ppm	ASTM D5185m 1270	<b>1191</b>	1195	1234
Sulfur	ppm	ASTM D5185m 2060	<b>3102</b>	3640	3272

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	8	7
Sodium	ppm	ASTM D5185m	<b>20</b>	146	161
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	4

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.3	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.0</b>	6.2	6.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.6</b>	17.7	17.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.3</b>	13.4	13.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.2</b>	9.0	9.2







# OIL ANALYSIS REPORT

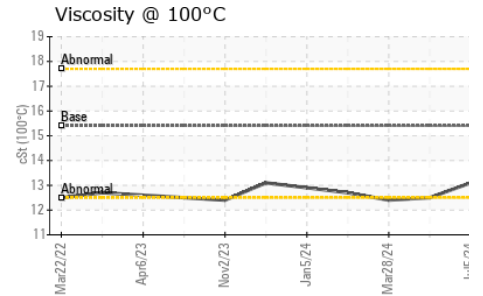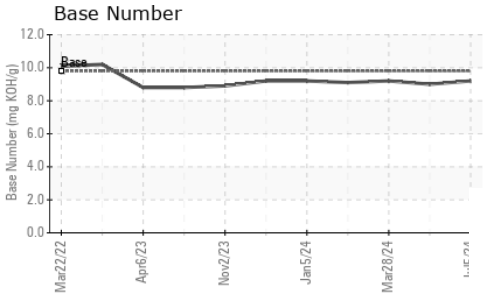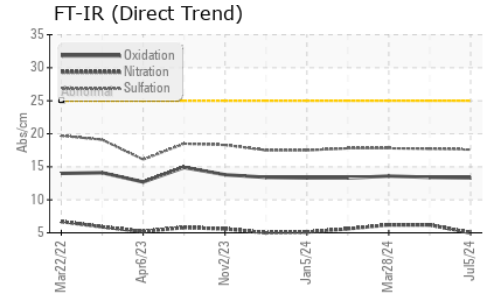

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.1</b>	12.5	12.4

## GRAPHS

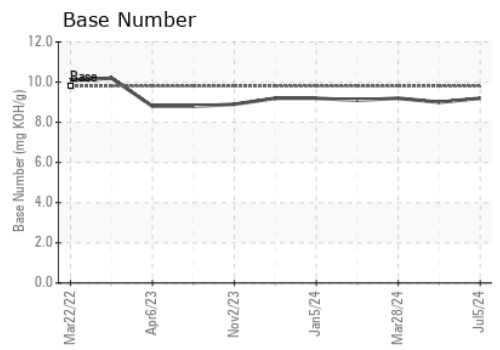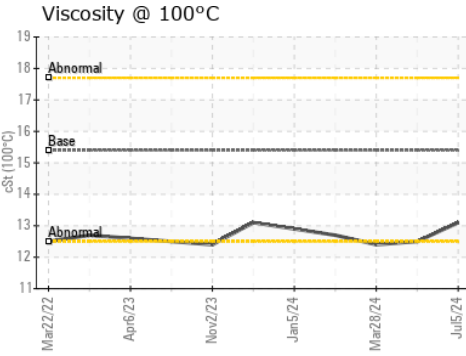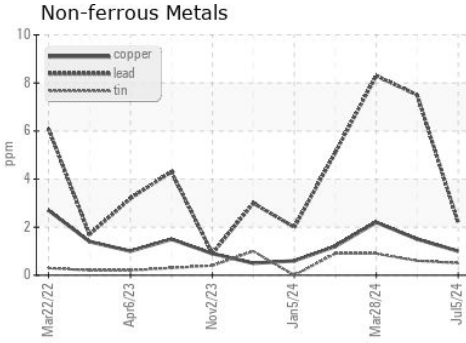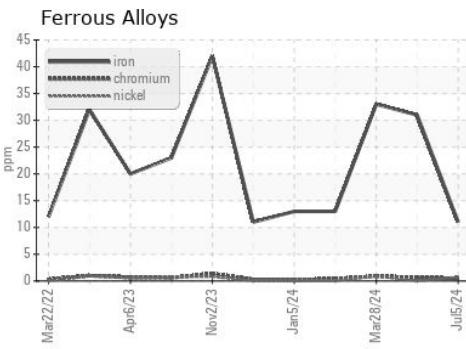

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0122563      **Received** : 10 Jul 2024  
**Lab Number** : 06232140      **Tested** : 11 Jul 2024  
**Unique Number** : 11115633      **Diagnosed** : 11 Jul 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 893 - OK East Hauling**  
 2100 Lilly Street  
 Seminole, OK  
 US 74868  
 Contact: Roger Barlow  
 rbarlow@gflenv.com  
 T: (405)204-6183  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)