


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

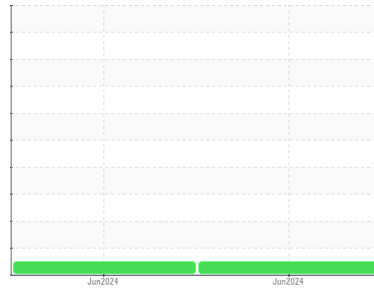

Area  
**(53564Z) Supreme Leasing-Tractor**  
 Machine Id  
**[Supreme Leasing-Tractor] 149A149344**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0128850</b>	PCA0128856	---
Sample Date	Client Info		<b>24 Jun 2024</b>	08 Jun 2024	---
Machine Age	mls	Client Info	<b>36692</b>	1720	---
Oil Age	mls	Client Info	<b>1979</b>	1720	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.0	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>11</b>	5	---
Chromium	ppm	ASTM D5185m >20	<b>1</b>	<1	---
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	---
Lead	ppm	ASTM D5185m >40	<b>2</b>	<1	---
Copper	ppm	ASTM D5185m >330	<b>1</b>	<1	---
Tin	ppm	ASTM D5185m >15	<b>1</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>8</b>	16	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 50	<b>58</b>	58	---
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185m 950	<b>868</b>	877	---
Calcium	ppm	ASTM D5185m 1050	<b>1008</b>	1011	---
Phosphorus	ppm	ASTM D5185m 995	<b>912</b>	889	---
Zinc	ppm	ASTM D5185m 1180	<b>1144</b>	1154	---
Sulfur	ppm	ASTM D5185m 2600	<b>2863</b>	3232	---

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	3	---
Sodium	ppm	ASTM D5185m	<b>1</b>	2	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	1	---




### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.1	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.2</b>	6.5	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.9</b>	18.7	---

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.4</b>	15.9	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>8.0</b>	8.1	---





# OIL ANALYSIS REPORT

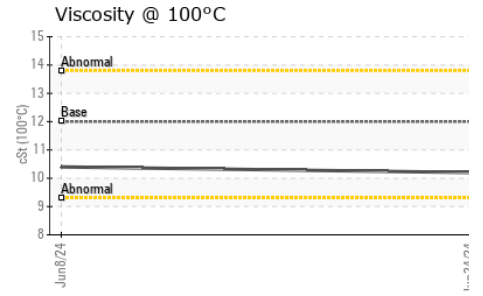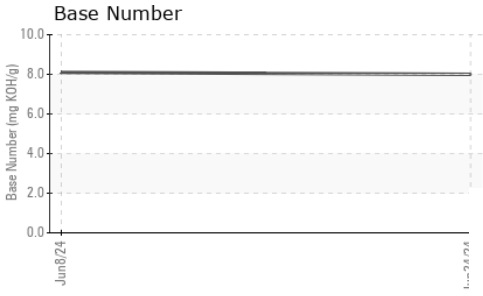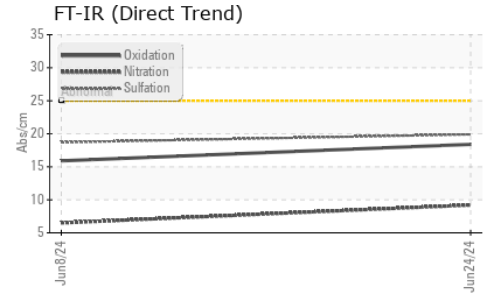

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.2	10.4

## GRAPHS

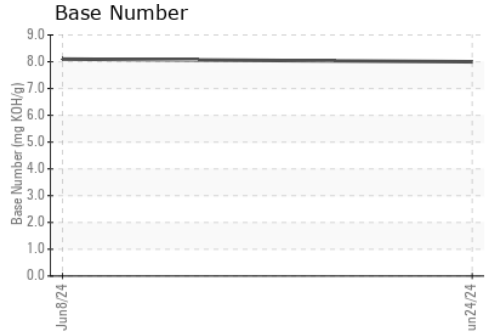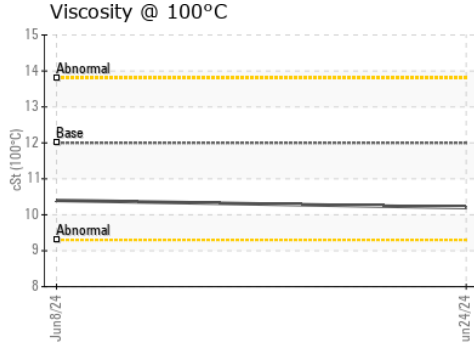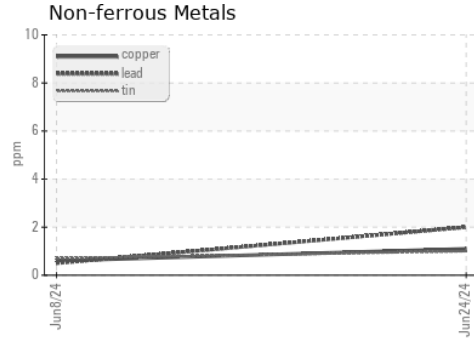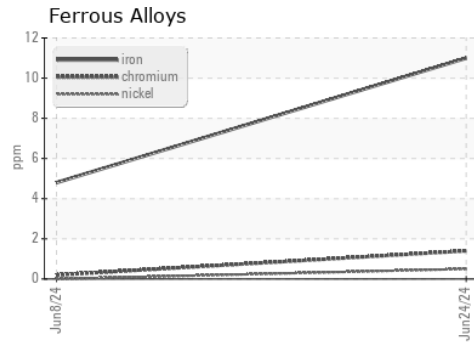

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0128850  
**Lab Number** : 06232153  
**Unique Number** : 11115646  
**Test Package** : FLEET

**Received** : 10 Jul 2024  
**Tested** : 11 Jul 2024  
**Diagnosed** : 11 Jul 2024 - Wes Davis

**Transervice - Shop 1490 - Supreme Leasing**  
 11601 W. Touhy Avenue, Bldg. 895  
 Chicago, IL  
 US 60666

Contact: Nick Liberto  
 nliberto@transervice.com  
 T: (773)686-8013

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)