




# OIL ANALYSIS REPORT



Area  
**(YA163151) {UNASSIGNED}**  
 Machine Id  
**2841**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON HP 15W40 (10 GAL)**

Sample Rating Trend

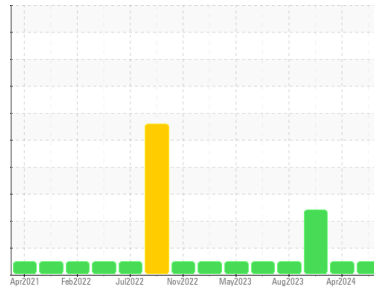

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0115923</b>	GFL0090020	GFL0080525
Sample Date	Client Info		<b>10 Jul 2024</b>	04 Apr 2024	17 Oct 2023
Machine Age	hrs	Client Info	<b>10497</b>	10497	10497
Oil Age	hrs	Client Info	<b>0</b>	0	10497
Oil Changed	Client Info		<b>Not Changed</b>	Not Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	<b>35</b>	35	75
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	4	8
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>15</b>	12	12
Lead	ppm	ASTM D5185m	>30	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>30	<b>8</b>	9	8
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	2	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>4</b>	10	3
Barium	ppm	ASTM D5185m		<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m		<b>58</b>	58	59
Manganese	ppm	ASTM D5185m		<b>0</b>	1	1
Magnesium	ppm	ASTM D5185m		<b>973</b>	871	930
Calcium	ppm	ASTM D5185m		<b>1119</b>	1124	1025
Phosphorus	ppm	ASTM D5185m		<b>1068</b>	966	1011
Zinc	ppm	ASTM D5185m		<b>1337</b>	1174	1258
Sulfur	ppm	ASTM D5185m		<b>3429</b>	2920	2863

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>30	<b>18</b>	22	31
Sodium	ppm	ASTM D5185m		<b>2</b>	3	1
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	5	2

## INFRA-RED




	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.3	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.4</b>	6.5	7.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.2</b>	18.6	18.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.0</b>	14.3	14.0
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.5</b>	8.5	8.1







# OIL ANALYSIS REPORT

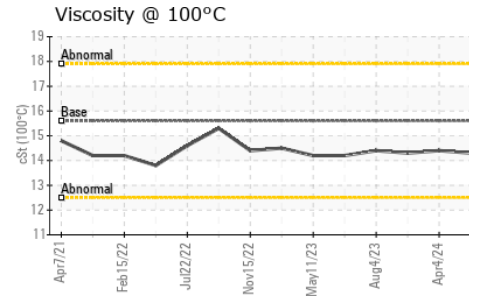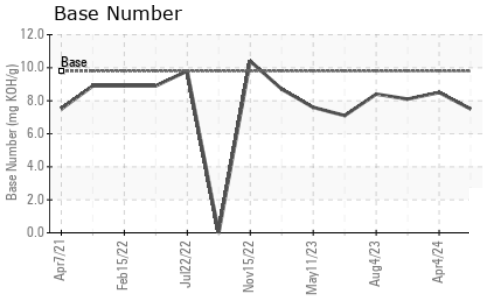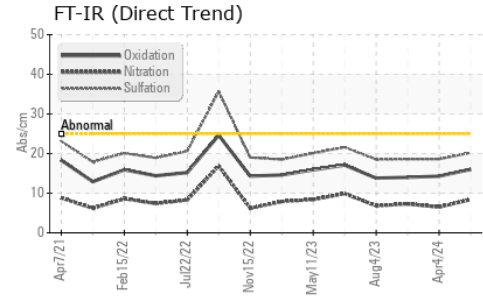

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.6	14.3	14.4

## GRAPHS

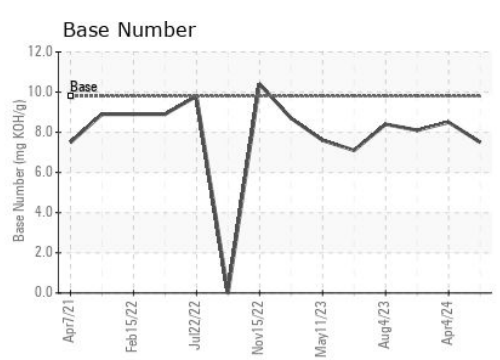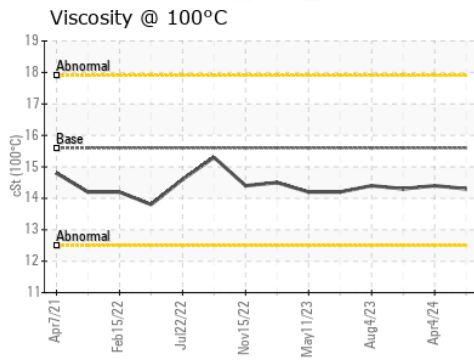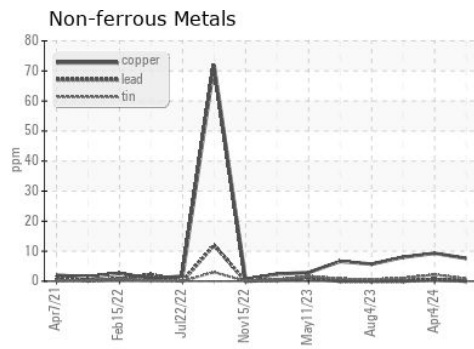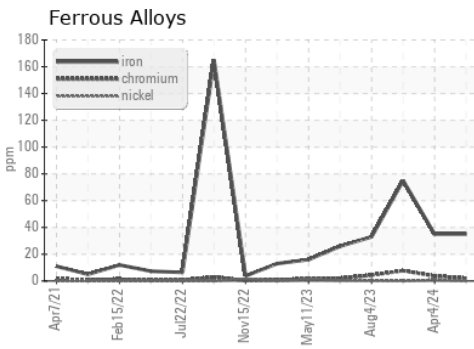

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0115923      **Received** : 11 Jul 2024  
**Lab Number** : 06232912      **Tested** : 11 Jul 2024  
**Unique Number** : 11116405      **Diagnosed** : 11 Jul 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 018 - Fayetteville**  
 4621 Marracco Drive  
 Hope Mills, NC  
 US 28348

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Robert Carter  
 robert.carter@gflenv.com  
 T: (910)596-1170  
 F: