


# OIL ANALYSIS REPORT

## Sample Rating Trend



ISO

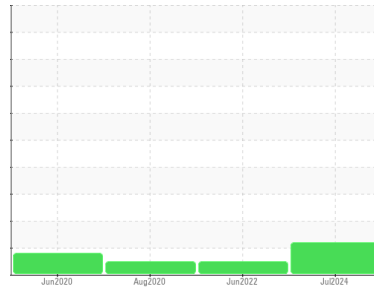

Area

**STUFF ROOM A [99031149]**

Machine Id

**KR-GR-003478 - FEED SCREW (S/N STUFF A - 11513096)**

Component

**Gearbox**

Fluid

**SCHAEFFER 293A SUPREME GEAR LUBE NO TACK 220 (--- GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. ( Customer Sample Comment: 99031149 )

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0118010</b>	PCA0071641	PCA0025977
Sample Date	Client Info	<b>09 Jul 2024</b>	14 Jun 2022	06 Aug 2020
Machine Age	hrs	<b>0</b>	0	48
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>Not Chngd</b>	N/A	Changed
Sample Status		<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>200	<b>19</b>	16	87
Chromium	ppm	ASTM D5185m	>15	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>15	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m		<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	0
Lead	ppm	ASTM D5185m	>100	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>200	<b>0</b>	<1	0
Tin	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Antimony	ppm	ASTM D5185m	>5	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m		<b>12</b>	15	8
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	1	0
Molybdenum	ppm	ASTM D5185m		<b>175</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>7</b>	0	0
Calcium	ppm	ASTM D5185m		<b>18</b>	5	5
Phosphorus	ppm	ASTM D5185m		<b>794</b>	342	412
Zinc	ppm	ASTM D5185m		<b>26</b>	17	0
Sulfur	ppm	ASTM D5185m		<b>19611</b>	16478	1136

## CONTAMINANTS


method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>50	<b>2</b>	<1	4
Sodium	ppm	ASTM D5185m		<b>2</b>	2	0
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	0

## FLUID CLEANLINESS


method	limit/base	current	history1	history2	
Particles >4µm	ASTM D7647	>10000	<b>▲ 22179</b>	---	---
Particles >6µm	ASTM D7647	>2500	<b>▲ 3239</b>	---	---
Particles >14µm	ASTM D7647	>640	<b>57</b>	---	---
Particles >21µm	ASTM D7647	>160	<b>6</b>	---	---
Particles >38µm	ASTM D7647	>40	<b>0</b>	---	---
Particles >71µm	ASTM D7647	>10	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>20/18/16	<b>▲ 22/19/13</b>	---	---

# OIL ANALYSIS REPORT


### ▲ Particle Trend

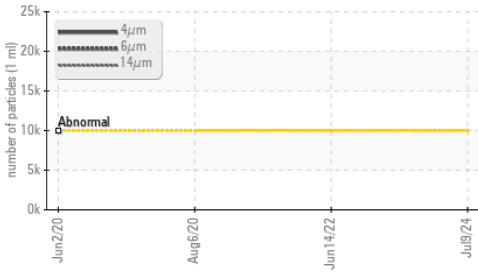


### ▲ Particle Trend

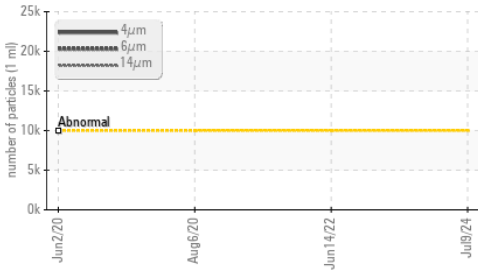

### Acid Number

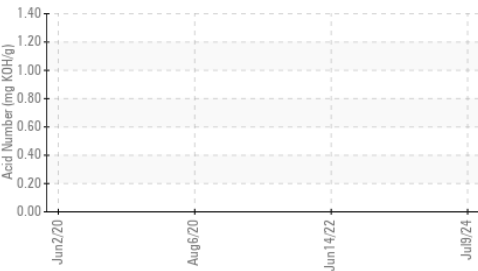

### Viscosity @ 40°C

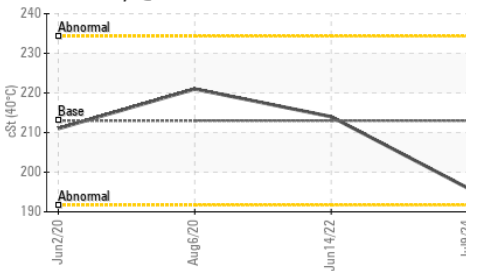

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045		<b>1.39</b>	---	---


### VISUAL

method	limit/base	current	history1	history2
White Metal scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Silt scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Debris scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Odor scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water scalar *Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water scalar *Visual		<b>NEG</b>	NEG	NEG

### FLUID PROPERTIES


method	limit/base	current	history1	history2
Visc @ 40°C cSt ASTM D445	213	<b>196</b>	214	221

### SAMPLE IMAGES

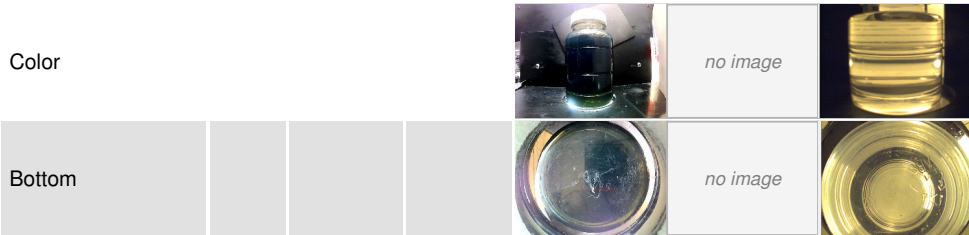


### GRAPHS


#### Ferrous Alloys

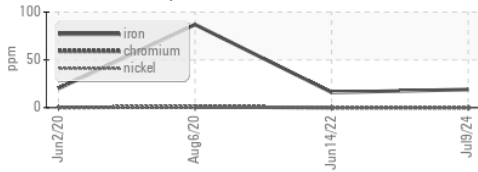


#### Non-ferrous Metals

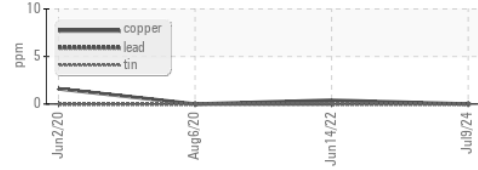

#### Viscosity @ 40°C

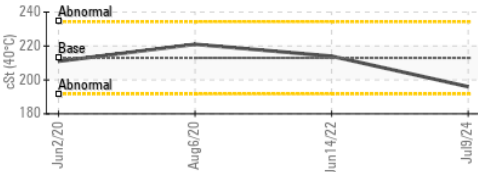

#### ▲ Particle Count

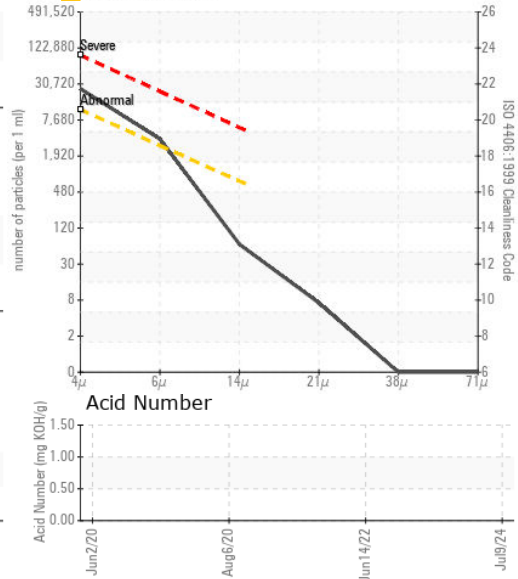

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : PCA0118010

**Lab Number** : 06233239

**Unique Number** : 11116732

**Test Package** : IND 2 ( Additional Tests: PrtCount )

**Received** : 11 Jul 2024

**Tested** : 12 Jul 2024

**Diagnosed** : 12 Jul 2024 - Don Baldrige

**KraftHeinz - Kirksville - Plant 8333 PCA**

2504 INDUSTRIAL DR

KIRKSVILLE, MO

US 63501

Contact: WALLACE WARD

wallace.ward@kraftheinzcompany.com

T: (660)627-1031

F: (660)627-5887

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)