

OIL ANALYSIS REPORT

Sample Rating Trend

Machine Id

811045

Component Diesel Engine Fluid DETRO CANADA DUBON SHP 15W40 (--

PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

🔺 Wear

The aluminum level is abnormal. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


AL)							
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		GFL0128565	GFL0123024	GFL0119413	
Sample Date		Client Info		06 Jul 2024	31 May 2024	02 May 2024	
lachine Age	hrs	Client Info		7626	7476	7277	
Dil Age	hrs	Client Info		150	199	171	
Dil Changed		Client Info		Changed	Changed	Changed	
Sample Status				ABNORMAL	NORMAL	NORMAL	
CONTAMINAT	ION	method	limit/base	current	history1	history2	
Fuel		WC Method	>5	<1.0	<1.0	<1.0	
Water		WC Method	>0.2	NEG	NEG	NEG	
Glycol		WC Method		NEG	NEG	NEG	
WEAR METAL	S	method	limit/base	current	history1	history2	
ron	ppm	ASTM D5185m	>100	20	8	25	
Chromium	ppm	ASTM D5185m	>20	<1	<1	1	
Nickel	ppm	ASTM D5185m	>4	0	0	<1	
Fitanium	ppm	ASTM D5185m		<1	<1	<1	
Silver	ppm	ASTM D5185m	>3	0	0	<1	
Aluminum	ppm	ASTM D5185m	>20	<u> </u>	8	16	
_ead	ppm	ASTM D5185m	>40	0	0	<1	
Copper	ppm	ASTM D5185m	>330	<1	<1	<1	
Гin	ppm	ASTM D5185m	>15	0	<1	<1	
Vanadium	ppm	ASTM D5185m		0	0	<1	
Cadmium	ppm	ASTM D5185m		0	0	0	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	8	15	19	
Barium	ppm	ASTM D5185m	0	0	1	0	
Molybdenum	ppm	ASTM D5185m	60	62	64	58	
Vanganese	ppm	ASTM D5185m	0	<1	0	0	
Magnesium	ppm	ASTM D5185m	1010	1009	935	868	
Calcium	ppm	ASTM D5185m	1070	1164	1103	1161	
Phosphorus	ppm	ASTM D5185m	1150	1067	1011	1135	
Zinc	ppm	ASTM D5185m	1270	1289	1242	1217	
Sulfur	ppm	ASTM D5185m	2060	3657	3416	3422	
CONTAMINAN	ITS	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	6	4	6	
Sodium	ppm	ASTM D5185m	-	5	0	7	
Potassium	ppm	ASTM D5185m	>20	37	17	25	
INFRA-RED		method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.8	0.4	0.3	
Nitration	Abs/cm	*ASTM D7624	>20	7.4	6.0	6.4	
Sulfation	Abs/.1mm	*ASTM D7415		19.8	18.6	18.6	
FLUID DEGRA		method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.2	13.9	14.1	


WEAR




OIL ANALYSIS REPORT







VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.0	14.3	13.8
GRAPHS						

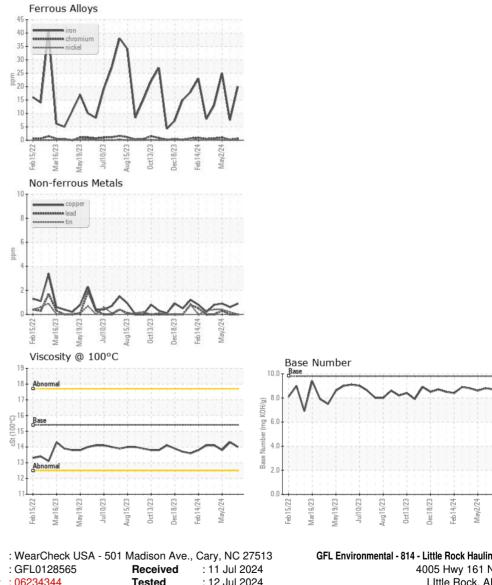

Laboratory GFL Environmental - 814 - Little Rock Hauling Sample No. 4005 Hwy 161 N. Lab Number : 06234344 Tested : 12 Jul 2024 LIttle Rock, AR Unique Number : 11123178 Diagnosed : 14 Jul 2024 - Don Baldridge US 72117 Contact: Brad Koenig Test Package : FLEET Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369. bkoenig@gflenv.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F:

Report Id: GFL814 [WUSCAR] 06234344 (Generated: 07/14/2024 12:18:18) Rev: 1