

OIL ANALYSIS REPORT



Machine Id 530753 Component Diesel Engine Fluid PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

Metal levels are typical for a components first oil change.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

āAL)				Jul2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0129050		
Sample Date		Client Info		05 Jul 2024		
Machine Age	mls	Client Info		87965		
Oil Age	mls	Client Info		87965		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	33		
Chromium	ppm	ASTM D5185m	>20	3		
Nickel	ppm	ASTM D5185m	>4	<1		
Titanium	ppm	ASTM D5185m		10		
Silver	ppm	ASTM D5185m	>3	<1		
Aluminum	ppm	ASTM D5185m	>20	28		
Lead	ppm	ASTM D5185m	>40	0		
Copper	ppm	ASTM D5185m	>330	95		
Tin	ppm	ASTM D5185m	>15	2		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	18		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum	ppm	ASTM D5185m	50	46		
Manganese	ppm	ASTM D5185m	0	<1		
Magnesium	ppm	ASTM D5185m	950	748		
Calcium	ppm	ASTM D5185m	1050	1351		
Phosphorus	ppm	ASTM D5185m	995	952		
Zinc	ppm	ASTM D5185m	1180	1208		
Sulfur	ppm	ASTM D5185m	2600	3144		
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	6		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	68		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.7		
Nitration	Abs/cm	*ASTM D7624	>20	9.3		
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.4		
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.7		
Base Number (BN)	mg KOH/g	ASTM D2896		6.6		



OIL ANALYSIS REPORT

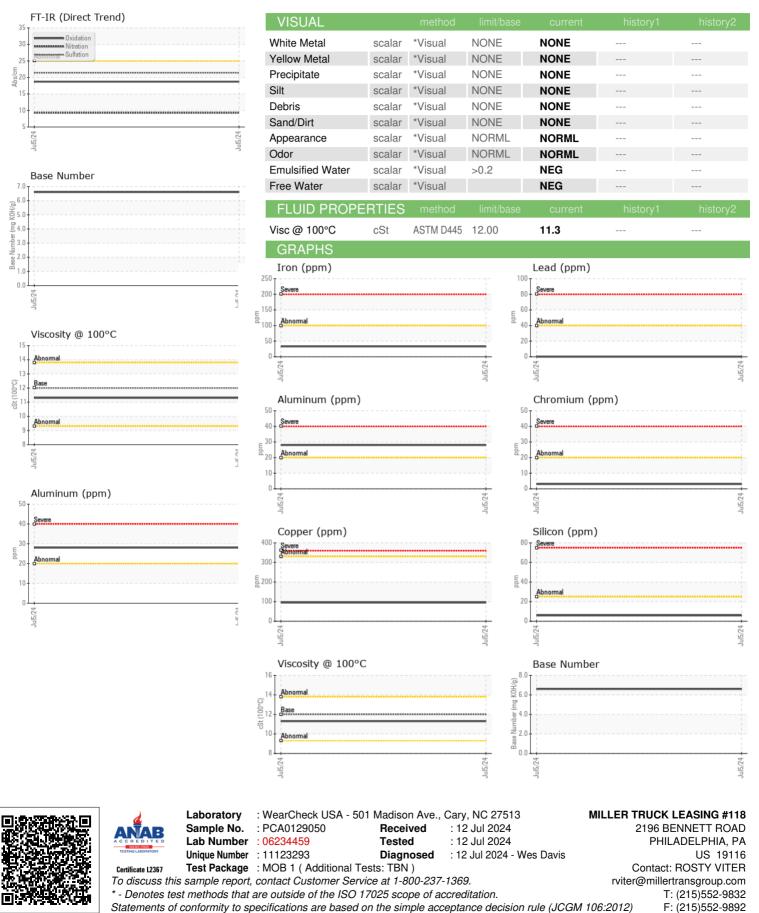

Report Id: MILPHINE [WUSCAR] 06234459 (Generated: 07/12/2024 17:31:46) Rev: 1

Contact/Location: ROSTY VITER - MILPHINE