




OIL ANALYSIS REPORT

Sample Rating Trend

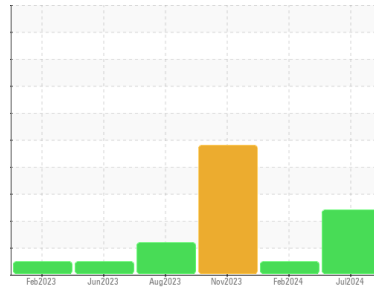

DEGRADATION



Machine Id
424033-402093
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (10 GAL)

DIAGNOSIS

Recommendation

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

Wear

All component wear rates are normal.

Contamination

There is an abnormal amount of solids and carbon present in the oil.

Fluid Condition

The oil viscosity is higher than normal. The BN level is low.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0110869	GFL0088460	GFL0088457
Sample Date	Client Info	10 Jul 2024	06 Feb 2024	30 Nov 2023
Machine Age	hrs	33070	32548	32237
Oil Age	hrs	600	600	600
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		ABNORMAL	NORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	21	6	52
Chromium	ppm ASTM D5185m >20	<1	<1	3
Nickel	ppm ASTM D5185m >5	0	1	1
Titanium	ppm ASTM D5185m >2	<1	<1	<1
Silver	ppm ASTM D5185m >2	0	<1	<1
Aluminum	ppm ASTM D5185m >20	2	2	▲ 60
Lead	ppm ASTM D5185m >40	3	<1	<1
Copper	ppm ASTM D5185m >330	2	2	▲ 222
Tin	ppm ASTM D5185m >15	0	<1	5
Vanadium	ppm ASTM D5185m	<1	<1	0
Cadmium	ppm ASTM D5185m	0	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	64	140	36
Barium	ppm ASTM D5185m 0	0	13	0
Molybdenum	ppm ASTM D5185m 0	2	6	46
Manganese	ppm ASTM D5185m	0	<1	4
Magnesium	ppm ASTM D5185m 0	18	34	576
Calcium	ppm ASTM D5185m	2395	1849	1687
Phosphorus	ppm ASTM D5185m	1027	893	775
Zinc	ppm ASTM D5185m	1249	1057	962
Sulfur	ppm ASTM D5185m	3206	3361	2589

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	2	4	8
Sodium	ppm ASTM D5185m	1	0	2
Potassium	ppm ASTM D5185m >20	8	8	▲ 159
Fuel	% ASTM D3524 >3.0	<1.0	<1.0	<1.0

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	▲ 4.2	0.4	▲ 4.2
Nitration	Abs/cm *ASTM D7624 >20	12.9	7.3	11.7
Sulfation	Abs/.1mm *ASTM D7415 >30	30.8	21.3	30.3


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	20.9	16.7	19.2
Base Number (BN)	mg KOH/g ASTM D2896 9.4	▲ 2.9	7.0	▲ 3.8




OIL ANALYSIS REPORT


▲ FT-IR (Direct Trend)

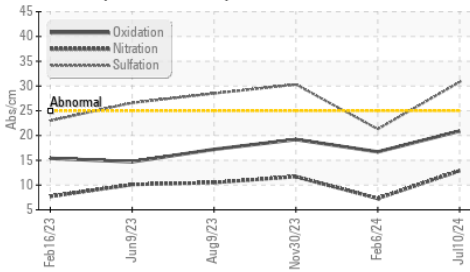


▲ Soot %

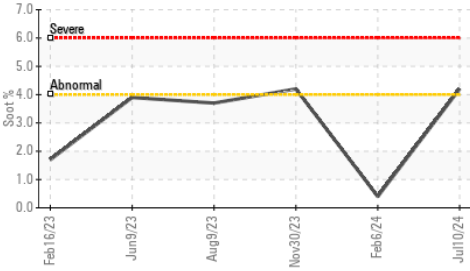

▲ Viscosity @ 100°C

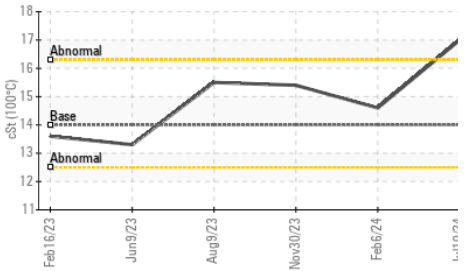





▲ Soot %

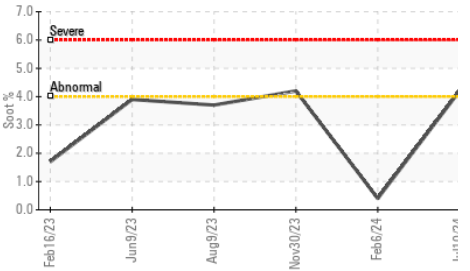

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	▲ 17.0	14.6	15.4

GRAPHS

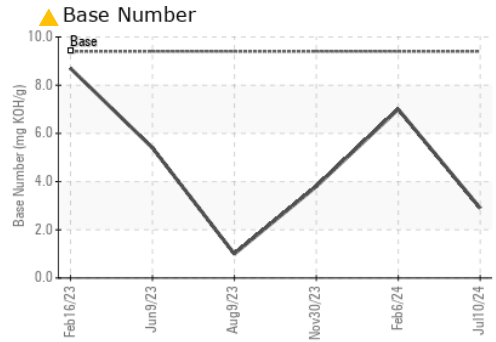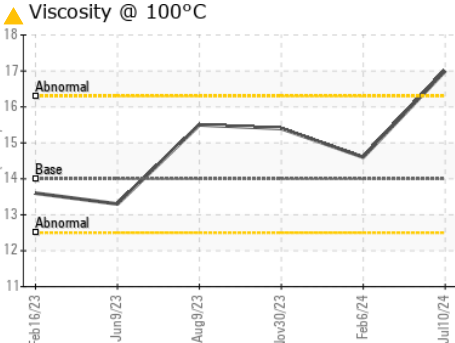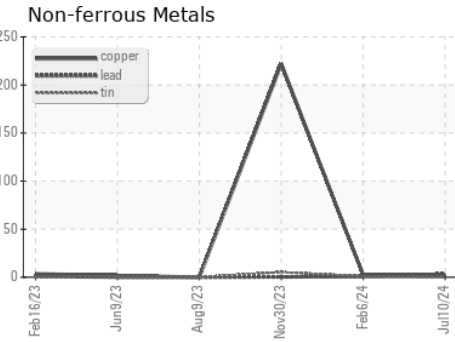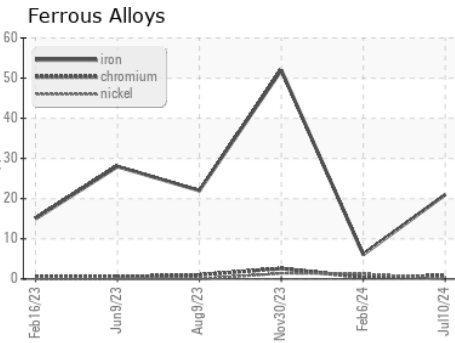

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0110869 **Received** : 12 Jul 2024
Lab Number : 06234552 **Tested** : 15 Jul 2024
Unique Number : 11123386 **Diagnosed** : 15 Jul 2024 - Don Baldrige
Test Package : FLEET (Additional Tests : FuelDilution)

GFL Environmental - 146 - Augusta
 1064 Franke Industrial
 Augusta, GA
 US 30909
 Contact: JEFFERY WASHINGTON
 jeff.washington@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: