




# OIL ANALYSIS REPORT

Sample Rating Trend

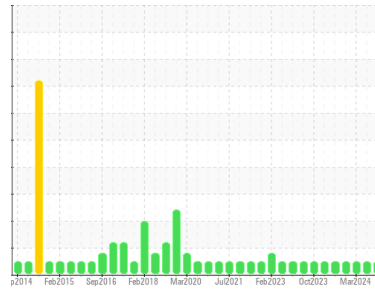

**NORMAL**



Machine Id  
**11077**  
 Component  
**Diesel Engine**  
 Fluid

**PETRO CANADA DURON SHP 15W40 (25 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0127784</b>	GFL0098923	GFL0098881	
Sample Date	Client Info	<b>02 Jul 2024</b>	21 May 2024	21 Mar 2024	
Machine Age	hrs	Client Info	<b>97623</b>	0	97523
Oil Age	hrs	Client Info	<b>97523</b>	0	97523
Oil Changed	Client Info	<b>N/A</b>	Not Changd	N/A	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >130	<b>26</b>	23	12
Chromium	ppm ASTM D5185m >10	<b>1</b>	1	<1
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm ASTM D5185m >20	<b>3</b>	3	2
Lead	ppm ASTM D5185m >20	<b>0</b>	<1	<1
Copper	ppm ASTM D5185m >125	<b>&lt;1</b>	<1	<1
Tin	ppm ASTM D5185m >4	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>0</b>	3	<1
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>53</b>	60	56
Manganese	ppm ASTM D5185m 0	<b>0</b>	0	<1
Magnesium	ppm ASTM D5185m 1010	<b>831</b>	837	863
Calcium	ppm ASTM D5185m 1070	<b>1045</b>	1055	1076
Phosphorus	ppm ASTM D5185m 1150	<b>951</b>	1004	980
Zinc	ppm ASTM D5185m 1270	<b>1151</b>	1130	1126
Sulfur	ppm ASTM D5185m 2060	<b>2550</b>	2943	3090

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>3</b>	4	4
Sodium	ppm ASTM D5185m	<b>1</b>	0	<1
Potassium	ppm ASTM D5185m >20	<b>2</b>	2	2

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>0.4</b>	0.3	0.1
Nitration	Abs/cm *ASTM D7624 >20	<b>7.8</b>	6.6	5.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.3</b>	17.7	16.8


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.3</b>	13.2	12.8
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.6</b>	8.1	8.1




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

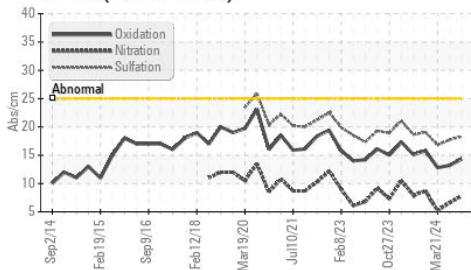

Base Number

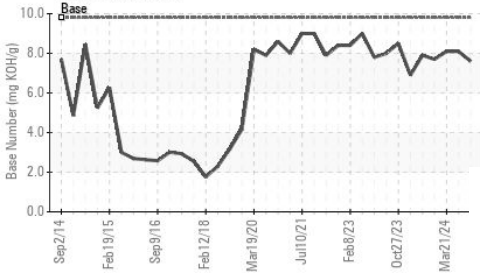

Viscosity @ 100°C

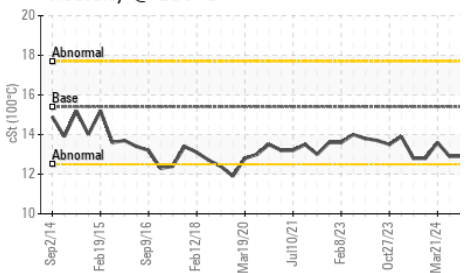


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.9	13.6

## GRAPHS


Ferrous Alloys

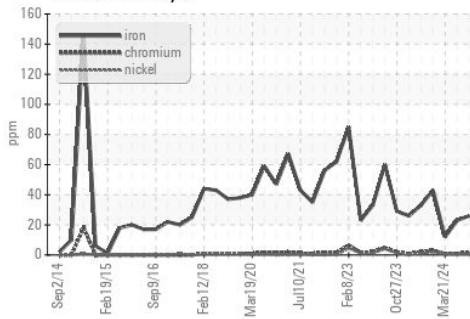


Non-ferrous Metals

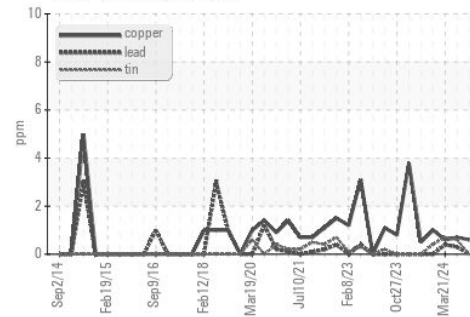

Viscosity @ 100°C

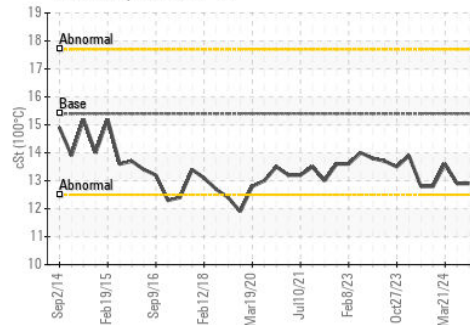

Base Number

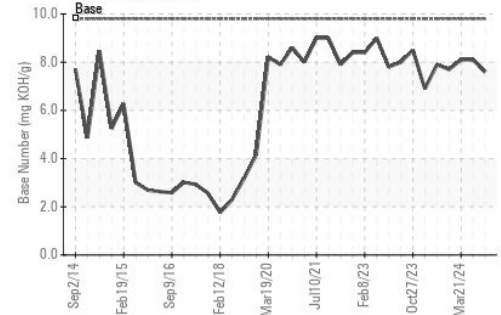

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0127784  
 Lab Number : 06234577  
 Unique Number : 11123411  
 Test Package : FLEET

Received : 12 Jul 2024  
 Tested : 12 Jul 2024  
 Diagnosed : 12 Jul 2024 - Wes Davis

GFL Environmental - 084 - Clarksville  
 699 Jack Miller Boulevard  
 Clarksville, TN  
 US 37042

Contact: ROBERT THIBAUT  
 robert.thibault@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (931)552-7276

F: (931)572-9674