


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

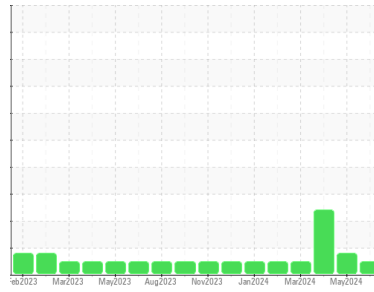

Area
(TEMP) Walgreens - Yard Horse
 Machine Id
[Walgreens - Yard Horse] 136A81258
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Top Up Amount: GAL)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0119130	PCA0119054	PCA0119123
Sample Date	Client Info			28 Jun 2024	15 May 2024	18 Apr 2024
Machine Age	hrs	Client Info		6581	6358	6202
Oil Age	hrs	Client Info		200	156	400
Oil Changed	Client Info			Oil Added	N/A	Changed
Sample Status				NORMAL	MARGINAL	SEVERE

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	▲ 3.3	▲ 8.2
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	10	9	46
Chromium	ppm	ASTM D5185m	>20	<1	<1	2
Nickel	ppm	ASTM D5185m	>4	1	0	1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	<1	0
Aluminum	ppm	ASTM D5185m	>20	7	6	8
Lead	ppm	ASTM D5185m	>40	0	<1	0
Copper	ppm	ASTM D5185m	>330	7	<1	1
Tin	ppm	ASTM D5185m	>15	0	<1	2
Vanadium	ppm	ASTM D5185m		<1	<1	<1
Cadmium	ppm	ASTM D5185m		0	0	1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<1	1	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	50	54	57	57
Manganese	ppm	ASTM D5185m	0	0	0	<1
Magnesium	ppm	ASTM D5185m	950	859	904	938
Calcium	ppm	ASTM D5185m	1050	1023	1012	1084
Phosphorus	ppm	ASTM D5185m	995	1005	1056	996
Zinc	ppm	ASTM D5185m	1180	1173	1177	1272
Sulfur	ppm	ASTM D5185m	2600	2765	3240	3461


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2	4	5
Sodium	ppm	ASTM D5185m		<1	2	3
Potassium	ppm	ASTM D5185m	>20	7	2	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.4	0.2	1.3
Nitration	Abs/cm	*ASTM D7624	>20	7.0	8.9	11.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.9	23.1	22.9


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.3	18.2	20.4
Base Number (BN)	mg KOH/g	ASTM D2896		8.8	6.8	6.1

OIL ANALYSIS REPORT


FT-IR (Direct Trend)

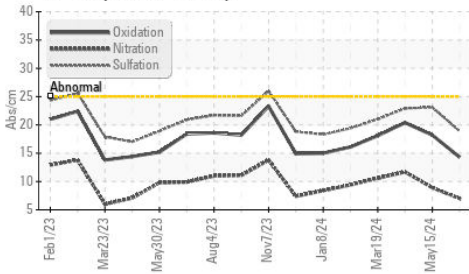

Base Number

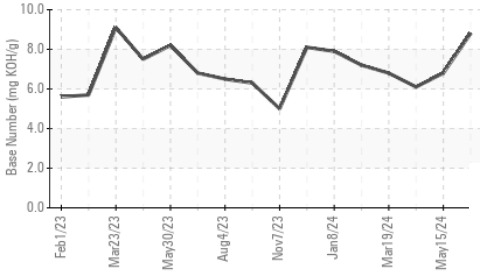

Viscosity @ 100°C

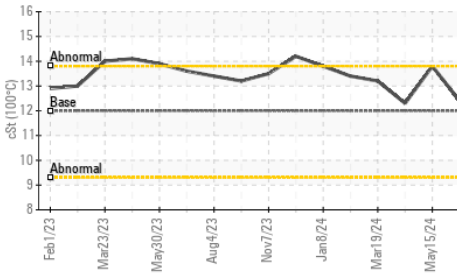


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	12.4	13.8 ▲ 12.3

GRAPHS


Ferrous Alloys

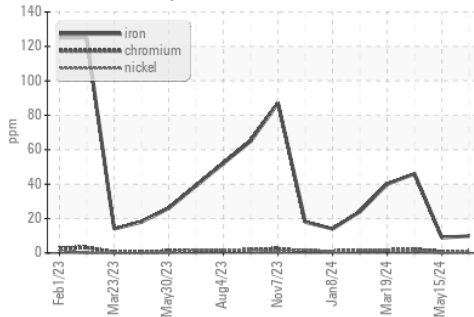


Non-ferrous Metals

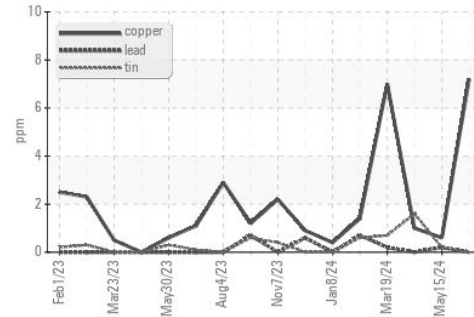

Viscosity @ 100°C

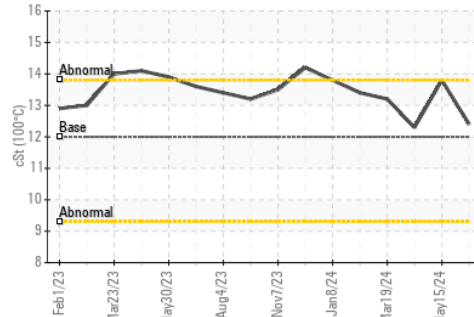

Base Number

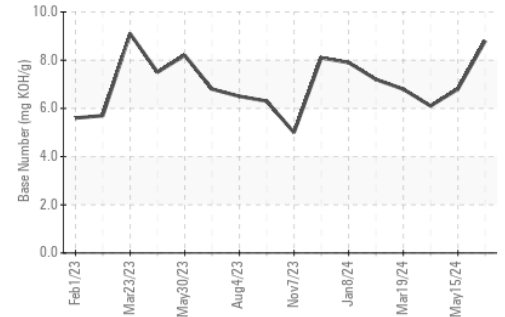

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : PCA0119130

Lab Number : 06234656

Unique Number : 11123490

Test Package : FLEET

Received : 12 Jul 2024

Tested : 15 Jul 2024

Diagnosed : 15 Jul 2024 - Don Baldrige

Transervice - Shop 1361 - Berkeley-Windsor

4400 State Road 19

Windsor, WI

US 53598

Contact: Mike Hurda

mhurda@transervice.com

T: (608)846-2726

F: (608)846-0389

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)