


OIL ANALYSIS REPORT

Sample Rating Trend





Machine Id RC-7 (S/N 63284)

Reciprocating Compressor

CHEVRON REFRIGERATION OIL WF 68 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable.


Fluid Condition

The oil viscosity is higher than normal. The AN level is acceptable for this fluid.

- GAL)		Mar2020	Sep 2020 Mar 2021	Sep.2021 May2023 Oct2023	Jul2024	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0125479	PCA0115279	PCA0106630
Sample Date		Client Info		01 Jul 2024	23 Feb 2024	09 Oct 2023
Machine Age	hrs	Client Info		35402	34056	33634
Oil Age	hrs	Client Info		2144	800	379
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Sample Status				ATTENTION	ATTENTION	ATTENTION
WEAR METALS	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	0
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	0	0	0
Tin	ppm	ASTM D5185m	>15	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	1
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		0	0	2
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		271	194	201
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1	0	<1
Sodium	ppm	ASTM D5185m		0	0	<1
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water	%	ASTM D6304	>0.1	0.002	0.003	0.001
ppm Water	ppm	ASTM D6304	>1000	19	35	12.5
FLUID CLEANL	INESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	493	822	499
Particles >6µm		ASTM D7647	>320	131	146	150
Particles >14µm		ASTM D7647	>40	9	6	18
Particles >21µm		ASTM D7647	>10	2	1	6
Particles >38µm		ASTM D7647	>3	0	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>18/15/12	16/14/10	17/14/10	16/14/11
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.014	0.014	0.014



OIL ANALYSIS REPORT

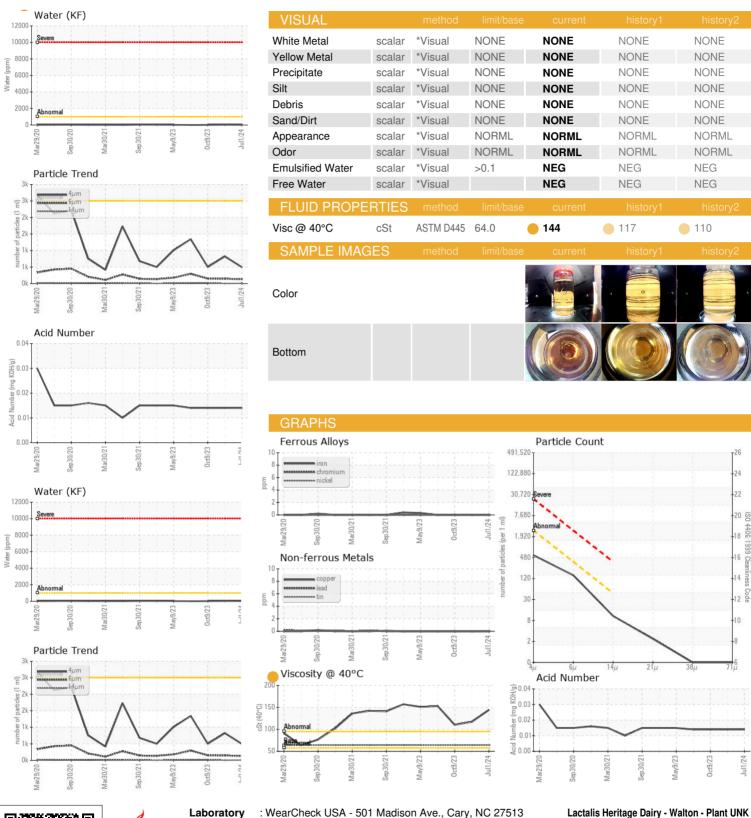





Certificate 12367

Laboratory Sample No.

Lab Number Unique Number : 11123865

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PCA0125479 : 06235031

Received **Tested** Diagnosed Test Package : IND 2 (Additional Tests: KF, PrtCount)

: 12 Jul 2024 : 15 Jul 2024 : 15 Jul 2024 - Don Baldridge

Walton, NY US 13856 Contact: Cindy Scofield cindy.scofield@kraft.com T: (607)865-2330

261 Delaware St.

To discuss this sample report, contact Customer Service at 1-800-237-1369. st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (607)865-8863 Contact/Location: Cindy Scofield - KRAWAL