


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

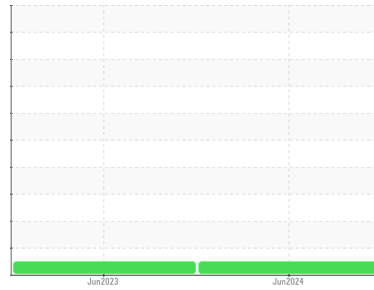

Area  
**(63156PC) Feldman Lumber-Tractor**  
 Machine Id  
**[Feldman Lumber-Tractor] 196A319**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0106065</b>	PCA0098276	---
Sample Date	Client Info			<b>25 Jun 2024</b>	23 Jun 2023	---
Machine Age	mls	Client Info		<b>105234</b>	91310	---
Oil Age	mls	Client Info		<b>13924</b>	7228	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>10</b>	6	---
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>30	<b>5</b>	<1	---
Lead	ppm	ASTM D5185m	>30	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>150	<b>7</b>	10	---
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>13</b>	10	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	50	<b>70</b>	63	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	950	<b>914</b>	942	---
Calcium	ppm	ASTM D5185m	1050	<b>1119</b>	1186	---
Phosphorus	ppm	ASTM D5185m	995	<b>1059</b>	1007	---
Zinc	ppm	ASTM D5185m	1180	<b>1234</b>	1272	---
Sulfur	ppm	ASTM D5185m	2600	<b>3407</b>	3617	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>7</b>	6	---
Sodium	ppm	ASTM D5185m		<b>2</b>	1	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	3	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.4</b>	7.7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.7</b>	19.0	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.5</b>	14.6	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.5</b>	8.5	---





# OIL ANALYSIS REPORT

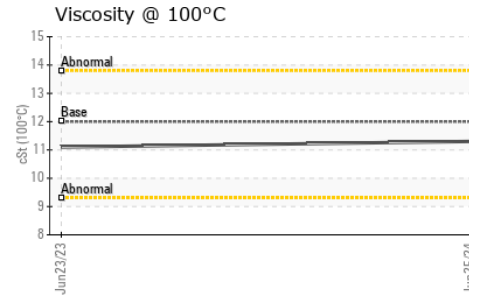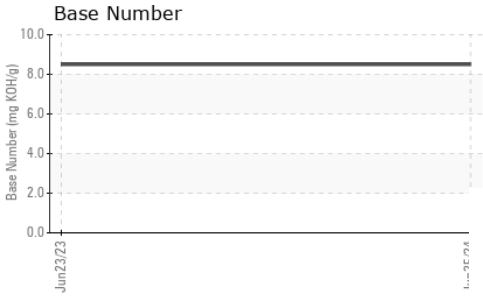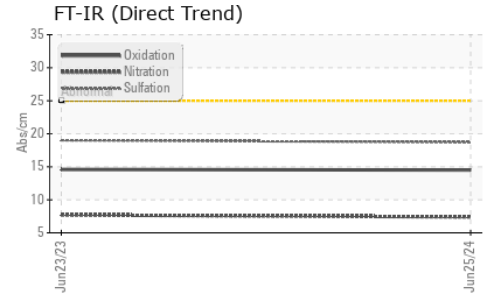

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.3</b>	11.1	---

## GRAPHS

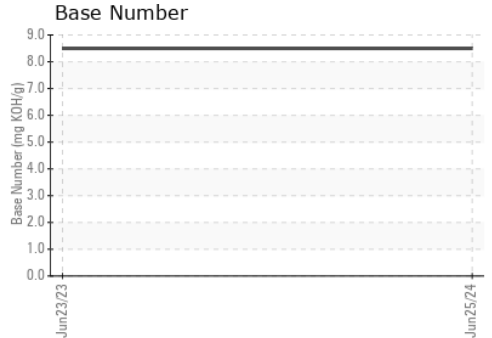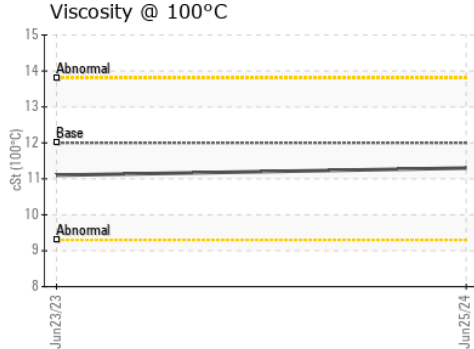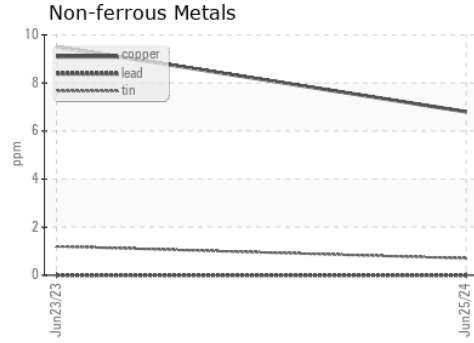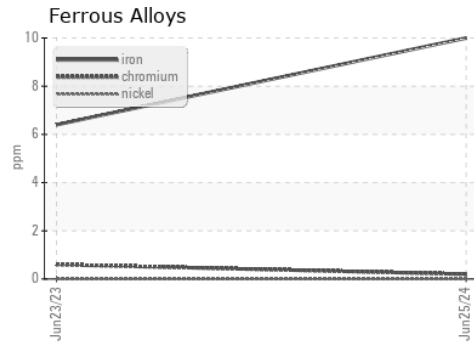

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0106065  
**Lab Number** : 06235373  
**Unique Number** : 11124207  
**Test Package** : FLEET

**Received** : 15 Jul 2024  
**Tested** : 15 Jul 2024  
**Diagnosed** : 15 Jul 2024 - Wes Davis

**Transervice - Shop 1960 - Feldman Lumber Service**  
 1281 Metropolitan Avenue  
 Brooklyn, NY  
 US 11237  
 Contact: Marc Fried  
 mfried@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: