


OIL ANALYSIS REPORT



Area
(77595PC) Feldman Lumber-Tractor
 Machine Id
[Feldman Lumber-Tractor] 196D258
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

Sample Rating Trend

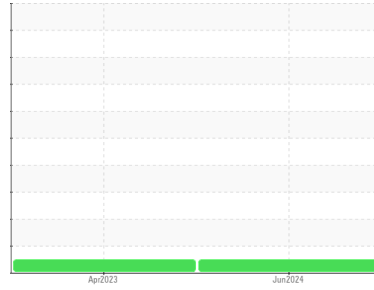

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|----------|
| Sample Number | Client Info | | PCA0098285 | PCA0089310 | --- |
| Sample Date | Client Info | | 11 Jun 2024 | 14 Apr 2023 | --- |
| Machine Age | mls | Client Info | 49023 | 39254 | --- |
| Oil Age | mls | Client Info | 9769 | 5901 | --- |
| Oil Changed | Client Info | | Changed | Changed | --- |
| Sample Status | | | NORMAL | NORMAL | --- |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >5 | <1.0 | <1.0 | --- |
| Water | WC Method | >0.2 | NEG | NEG | --- |
| Glycol | WC Method | | NEG | NEG | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >80 | 21 | 4 | --- |
| Chromium | ppm | ASTM D5185m >5 | 2 | <1 | --- |
| Nickel | ppm | ASTM D5185m >2 | 0 | 0 | --- |
| Titanium | ppm | ASTM D5185m | 0 | 0 | --- |
| Silver | ppm | ASTM D5185m >3 | 0 | 0 | --- |
| Aluminum | ppm | ASTM D5185m >30 | 18 | 3 | --- |
| Lead | ppm | ASTM D5185m >30 | 0 | 0 | --- |
| Copper | ppm | ASTM D5185m >150 | 15 | 8 | --- |
| Tin | ppm | ASTM D5185m >5 | <1 | <1 | --- |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | --- |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m 2 | 15 | 11 | --- |
| Barium | ppm | ASTM D5185m 0 | 0 | 0 | --- |
| Molybdenum | ppm | ASTM D5185m 50 | 64 | 58 | --- |
| Manganese | ppm | ASTM D5185m 0 | <1 | <1 | --- |
| Magnesium | ppm | ASTM D5185m 950 | 841 | 899 | --- |
| Calcium | ppm | ASTM D5185m 1050 | 1130 | 1094 | --- |
| Phosphorus | ppm | ASTM D5185m 995 | 1003 | 947 | --- |
| Zinc | ppm | ASTM D5185m 1180 | 1175 | 1191 | --- |
| Sulfur | ppm | ASTM D5185m 2600 | 3129 | 3496 | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|-----------|----------|----------|
| Silicon | ppm | ASTM D5185m >20 | 5 | 3 | --- |
| Sodium | ppm | ASTM D5185m | 2 | <1 | --- |
| Potassium | ppm | ASTM D5185m >20 | 36 | <1 | --- |

INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 >3 | 0.5 | 0.2 | --- |
| Nitration | Abs/cm | *ASTM D7624 >20 | 8.5 | 6.1 | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | 20.4 | 17.9 | --- |


FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 >25 | 15.7 | 13.2 | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 6.9 | 8.9 | --- |




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

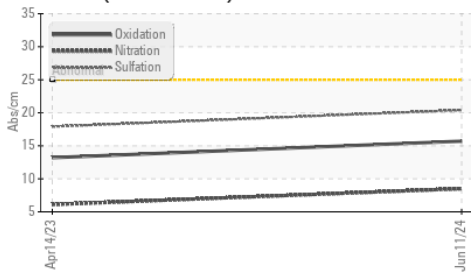

Base Number

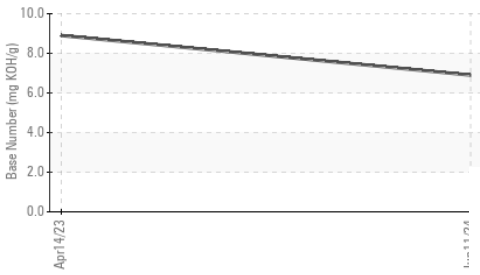

Viscosity @ 100°C

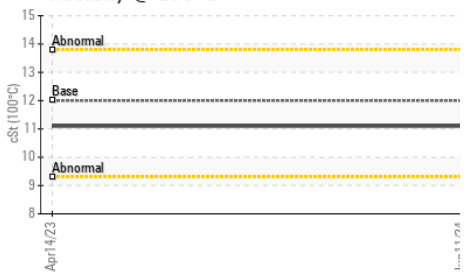


| PARAMETER | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- |
| Silt | scalar | *Visual | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- |
| Free Water | scalar | *Visual | | NEG | --- |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 12.00 | 11.1 | --- |

GRAPHS


Ferrous Alloys

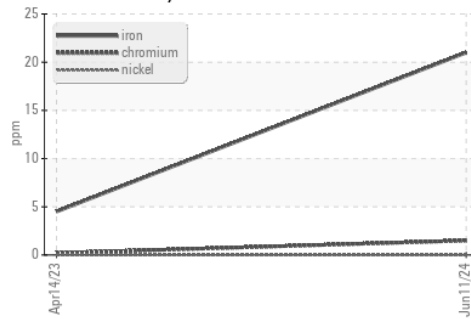


Non-ferrous Metals

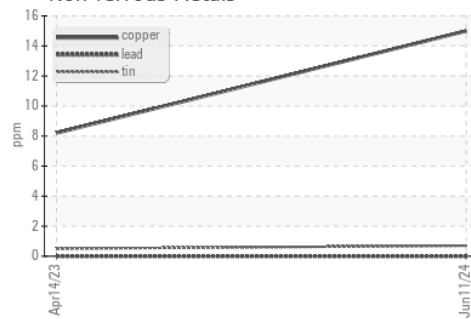

Viscosity @ 100°C

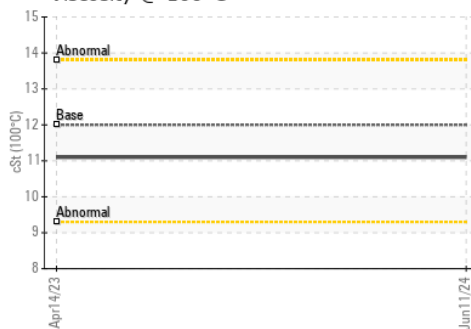

Base Number

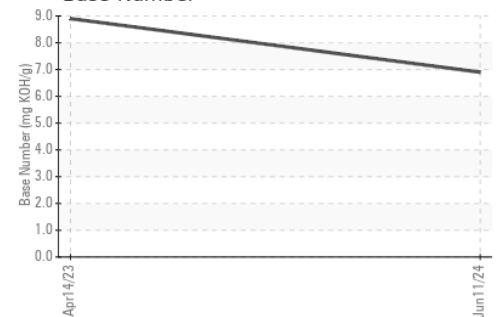

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0098285
Lab Number : 06235376
Unique Number : 11124210
Test Package : FLEET

Received : 15 Jul 2024
Tested : 15 Jul 2024
Diagnosed : 15 Jul 2024 - Wes Davis

Transervice - Shop 1960 - Feldman Lumber Service
 1281 Metropolitan Avenue
 Brooklyn, NY
 US 11237
 Contact: Marc Fried
 mfried@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: