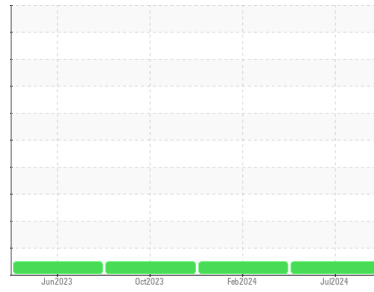


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**



Area  
**(P955052) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136D25688**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0123071</b>	PCA0110553	PCA0093522
Sample Date	Client Info			<b>02 Jul 2024</b>	06 Feb 2024	11 Oct 2023
Machine Age	mls	Client Info		<b>96834</b>	89372	89372
Oil Age	mls	Client Info		<b>7462</b>	89372	2619
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>110	<b>14</b>	14	23
Chromium	ppm	ASTM D5185m	>4	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>9</b>	1	18
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>5</b>	2	2
Lead	ppm	ASTM D5185m	>45	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>85	<b>5</b>	4	<1
Tin	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	<1

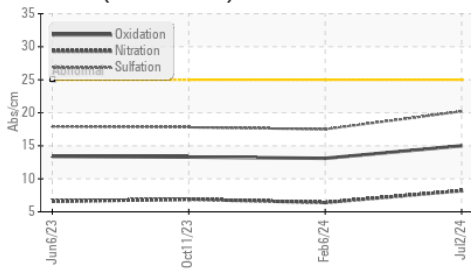
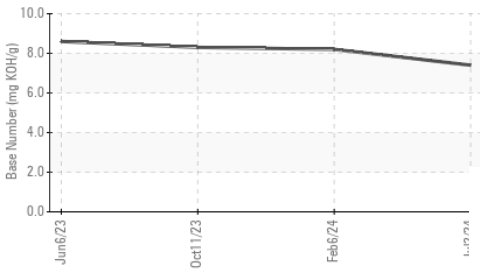
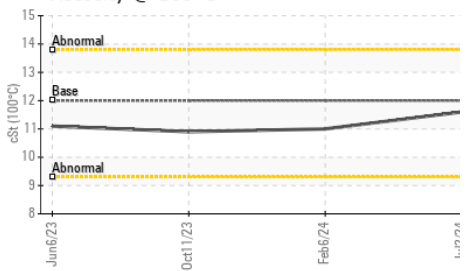
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>4</b>	15	40
Barium	ppm	ASTM D5185m	0	<b>0</b>	3	3
Molybdenum	ppm	ASTM D5185m	50	<b>52</b>	59	46
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	950	<b>876</b>	854	744
Calcium	ppm	ASTM D5185m	1050	<b>1226</b>	1043	1235
Phosphorus	ppm	ASTM D5185m	995	<b>1015</b>	943	1046
Zinc	ppm	ASTM D5185m	1180	<b>1205</b>	1146	1165
Sulfur	ppm	ASTM D5185m	2600	<b>3363</b>	3006	3421

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>4</b>	3	5
Sodium	ppm	ASTM D5185m		<b>2</b>	0	0
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	5	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.2</b>	6.4	6.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.2</b>	17.5	17.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.0</b>	13.1	13.3
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.4</b>	8.2	8.3

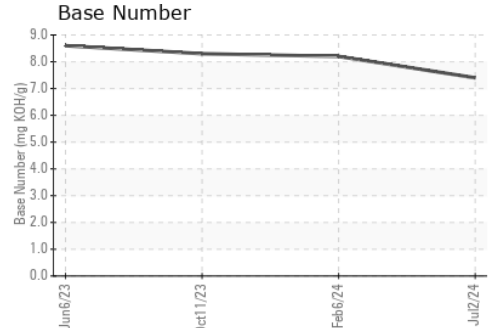
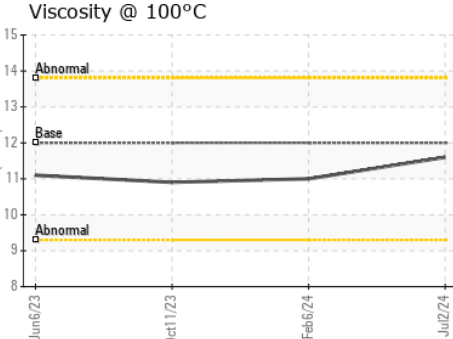
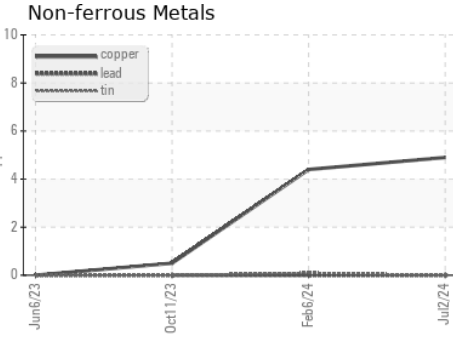
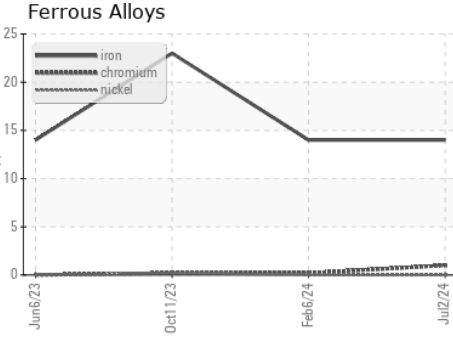
# OIL ANALYSIS REPORT

**FT-IR (Direct Trend)**

**Base Number**

**Viscosity @ 100°C**


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.6	11.0

## GRAPHS



Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0123071      **Received** : 15 Jul 2024  
**Lab Number** : 06235512      **Tested** : 15 Jul 2024  
**Unique Number** : 11124346      **Diagnosed** : 15 Jul 2024 - Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1376 - Berkeley-Linden**  
 3425 Tremley Point Road  
 Linden, NJ  
 US 07036

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

 Contact: Shop 1376 Oil Analysis  
 shop1376@transervice.com

 T:  
 F: