


# OIL ANALYSIS REPORT

Area  
**(MB9196)**  
Machine Id  
**2507**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (10 GAL)**

Sample Rating Trend

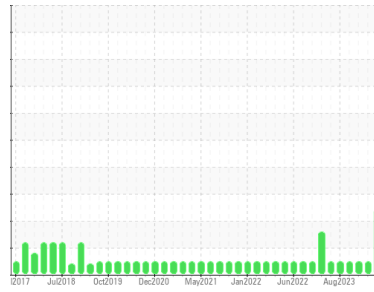

**GLYCOL**



## DIAGNOSIS

### ▲ Recommendation

Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### ▲ Contamination

Sodium and/or potassium levels are high. Test for glycol is negative.

### ▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0124236</b>	PCA0124245	PCA0113425
Sample Date	Client Info			<b>12 Jul 2024</b>	14 May 2024	13 Feb 2024
Machine Age	hrs	Client Info		<b>2858</b>	2252	1891
Oil Age	hrs	Client Info		<b>606</b>	361	567
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>ABNORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>165	<b>21</b>	16	32
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	1	3
Lead	ppm	ASTM D5185m	>150	<b>5</b>	2	6
Copper	ppm	ASTM D5185m	>90	<b>3</b>	1	4
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>9</b>	6	11
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>74</b>	59	73
Manganese	ppm	ASTM D5185m	0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>708</b>	690	858
Calcium	ppm	ASTM D5185m	1070	<b>1490</b>	1565	1163
Phosphorus	ppm	ASTM D5185m	1150	<b>923</b>	1006	987
Zinc	ppm	ASTM D5185m	1270	<b>1192</b>	1246	1193
Sulfur	ppm	ASTM D5185m	2060	<b>2918</b>	3775	2978


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>35	<b>10</b>	7	14
Sodium	ppm	ASTM D5185m		<b>▲ 73</b>	21	20
Potassium	ppm	ASTM D5185m	>20	<b>▲ 59</b>	21	20
Glycol	%	*ASTM D2982		<b>NEG</b>	NEG	NEG

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>7.5	<b>0.8</b>	0.6	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.1</b>	9.3	10.2
Sulfation	Abs.1mm	*ASTM D7415	>30	<b>22.6</b>	19.6	21.3


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs.1mm	*ASTM D7414	>25	<b>18.0</b>	15.3	17.0
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>6.3</b>	6.9	6.4

# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

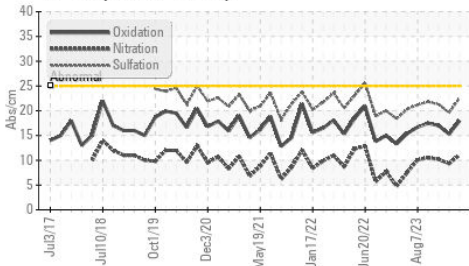


Glycol Contamination

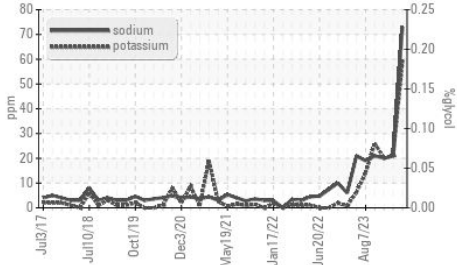

Viscosity @ 100°C

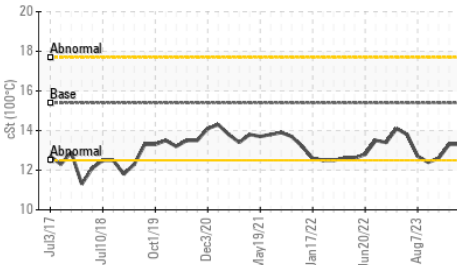

Glycol Contamination

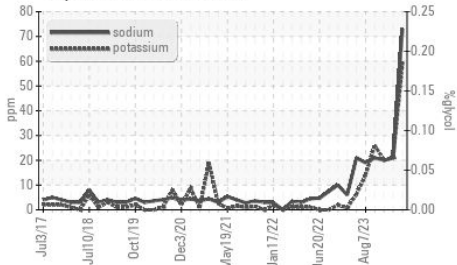


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.3</b>	13.3

## GRAPHS


Ferrous Alloys

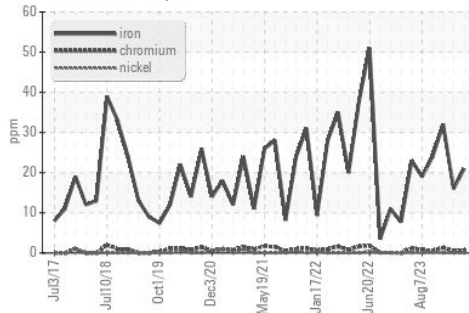


Non-ferrous Metals

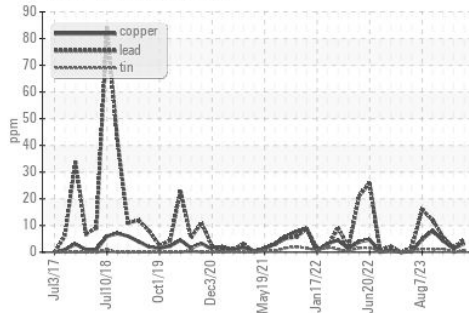

Viscosity @ 100°C

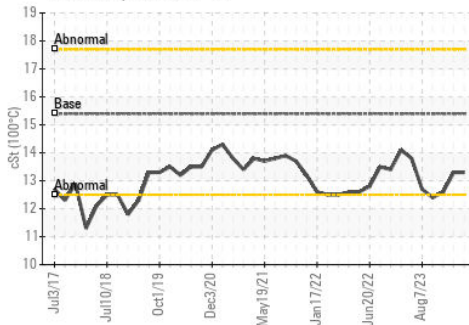

Base Number

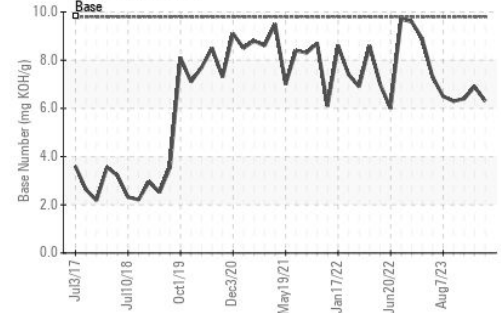

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : PCA0124236

**Lab Number** : 06235534

**Unique Number** : 11124368

**Test Package** : FLEET ( Additional Tests: Glycol )

**Received** : 15 Jul 2024

**Tested** : 17 Jul 2024

**Diagnosed** : 17 Jul 2024 - Jonathan Hester

**GFL Environmental - 002 - Vance-Granville**

241 Vanco Mill Rd

Henderson, NC

US 27537

Contact: Cameron King

cameron.king@gflenv.com

T: (252)438-5333

F: (252)431-1635

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)