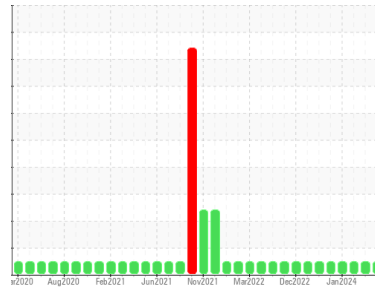


OIL ANALYSIS REPORT

Machine Id
12023
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (10 GAL)

Sample Rating Trend



DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | PCA0124234 | PCA0113454 | PCA0113426 |
| Sample Date | Client Info | 12 Jul 2024 | 14 May 2024 | 13 Feb 2024 |
| Machine Age | hrs | 11333 | 10752 | 10322 |
| Oil Age | hrs | 581 | 430 | 561 |
| Oil Changed | Client Info | Changed | Changed | Changed |
| Sample Status | | NORMAL | NORMAL | NORMAL |

CONTAMINATION

| method | limit/base | current | history1 | history2 |
|--------|----------------|----------------|----------|----------|
| Fuel | WC Method >5 | <1.0 | <1.0 | <1.0 |
| Water | WC Method >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | NEG | NEG | NEG |

WEAR METALS

| method | limit/base | current | history1 | history2 |
|----------|----------------------|--------------|----------|----------|
| Iron | ppm ASTM D5185m >100 | 8 | 6 | 8 |
| Chromium | ppm ASTM D5185m >20 | <1 | <1 | <1 |
| Nickel | ppm ASTM D5185m >4 | 0 | 0 | 0 |
| Titanium | ppm ASTM D5185m | <1 | <1 | 0 |
| Silver | ppm ASTM D5185m >3 | <1 | 0 | 0 |
| Aluminum | ppm ASTM D5185m >20 | 3 | 1 | 2 |
| Lead | ppm ASTM D5185m >40 | 0 | 0 | 0 |
| Copper | ppm ASTM D5185m >330 | 1 | 1 | 1 |
| Tin | ppm ASTM D5185m >15 | 0 | 0 | <1 |
| Vanadium | ppm ASTM D5185m | <1 | 0 | 0 |
| Cadmium | ppm ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| method | limit/base | current | history1 | history2 |
|------------|----------------------|--------------|----------|----------|
| Boron | ppm ASTM D5185m 0 | 11 | 14 | 17 |
| Barium | ppm ASTM D5185m 0 | <1 | 0 | 0 |
| Molybdenum | ppm ASTM D5185m 60 | 66 | 63 | 63 |
| Manganese | ppm ASTM D5185m 0 | 0 | <1 | <1 |
| Magnesium | ppm ASTM D5185m 1010 | 716 | 767 | 704 |
| Calcium | ppm ASTM D5185m 1070 | 1427 | 1558 | 1375 |
| Phosphorus | ppm ASTM D5185m 1150 | 915 | 1035 | 991 |
| Zinc | ppm ASTM D5185m 1270 | 1182 | 1317 | 1216 |
| Sulfur | ppm ASTM D5185m 2060 | 2884 | 3912 | 3232 |

CONTAMINANTS

| method | limit/base | current | history1 | history2 |
|-----------|---------------------|--------------|----------|----------|
| Silicon | ppm ASTM D5185m >25 | 4 | 3 | 4 |
| Sodium | ppm ASTM D5185m | <1 | 2 | 3 |
| Potassium | ppm ASTM D5185m >20 | 2 | <1 | <1 |

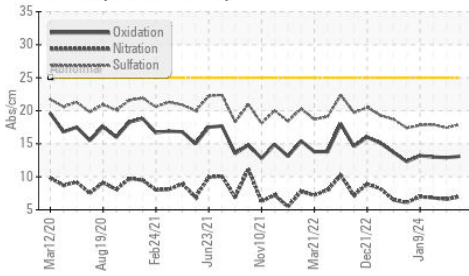
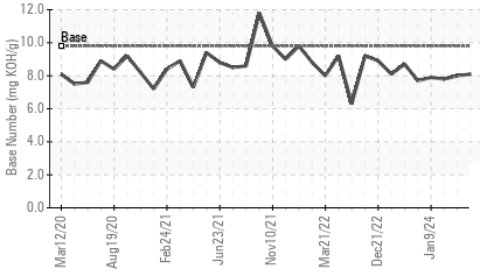
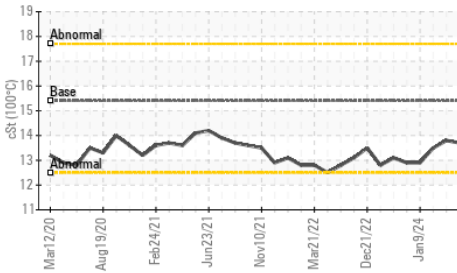
INFRA-RED

| method | limit/base | current | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot % | % *ASTM D7844 >3 | 0.2 | 0.2 | 0.2 |
| Nitration | Abs/cm *ASTM D7624 >20 | 7.0 | 6.6 | 6.8 |
| Sulfation | Abs/.1mm *ASTM D7415 >30 | 17.9 | 17.4 | 17.9 |

FLUID DEGRADATION

| method | limit/base | current | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Oxidation | Abs/.1mm *ASTM D7414 >25 | 13.1 | 12.9 | 13.0 |
| Base Number (BN) | mg KOH/g ASTM D2896 9.8 | 8.1 | 8.0 | 7.8 |

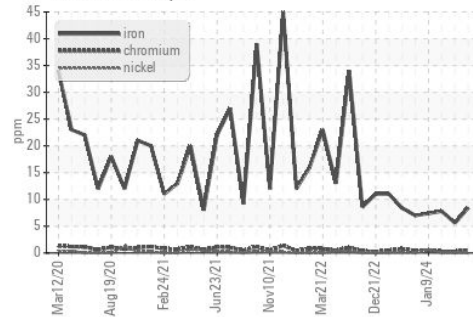
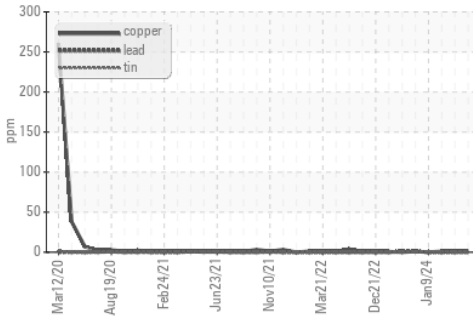
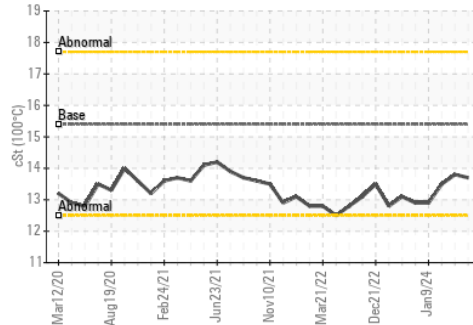
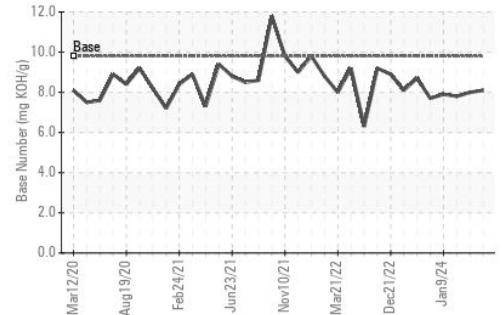
OIL ANALYSIS REPORT

FT-IR (Direct Trend)

Base Number

Viscosity @ 100°C

VISUAL

| | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

FLUID PROPERTIES

| | method | limit/base | current | history1 | history2 |
|--------------|--------|------------|---------|-------------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 13.7 | 13.8 |

GRAPHS
Ferrous Alloys

Non-ferrous Metals

Viscosity @ 100°C

Base Number


Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0124234
Lab Number : 06235536
Unique Number : 11124370
Test Package : FLEET

Received : 15 Jul 2024
Tested : 15 Jul 2024
Diagnosed : 15 Jul 2024 - Wes Davis

GFL Environmental - 002 - Vance-Granville
 241 Vanco Mill Rd
 Henderson, NC
 US 27537

Contact: Cameron King
 cameron.king@gflenv.com

T: (252)438-5333

F: (252)431-1635

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)