




OIL ANALYSIS REPORT

Sample Rating Trend

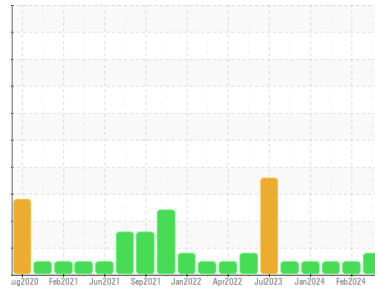

SOOT



Machine Id
822023-120

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- LTR)

DIAGNOSIS

▲ Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

Fuel content negligible. There is an abnormal amount of solids and carbon present in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0127194	GFL0111844	GFL0108265
Sample Date	Client Info	11 Jul 2024	23 Feb 2024	30 Jan 2024
Machine Age	hrs	8427	8135	7956
Oil Age	hrs	8248	179	5571
Oil Changed	Client Info	Not Chngd	Not Chngd	Changed
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>110	62	13	16
Chromium	ppm	ASTM D5185m	>4	2	<1	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>25	3	2	2
Lead	ppm	ASTM D5185m	>45	2	0	<1
Copper	ppm	ASTM D5185m	>85	3	<1	<1
Tin	ppm	ASTM D5185m	>4	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	10	14	7
Barium	ppm	ASTM D5185m	0	<1	8	<1
Molybdenum	ppm	ASTM D5185m	60	61	53	58
Manganese	ppm	ASTM D5185m	0	<1	0	0
Magnesium	ppm	ASTM D5185m	1010	912	804	882
Calcium	ppm	ASTM D5185m	1070	1206	987	1112
Phosphorus	ppm	ASTM D5185m	1150	933	934	1016
Zinc	ppm	ASTM D5185m	1270	1237	1083	1182
Sulfur	ppm	ASTM D5185m	2060	2864	3083	3287

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>30	8	3	2
Sodium	ppm	ASTM D5185m		1	0	0
Potassium	ppm	ASTM D5185m	>20	6	3	3
Fuel	%	ASTM D3524	>5	0.2	<1.0	<1.0

INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	▲ 3.7	1.2	1.1
Nitration	Abs/cm	*ASTM D7624	>20	10.3	6.0	5.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.4	19.0	18.9


FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.2	12.6	12.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.9	8.5	9.3




OIL ANALYSIS REPORT


▲ FT-IR (Direct Trend)

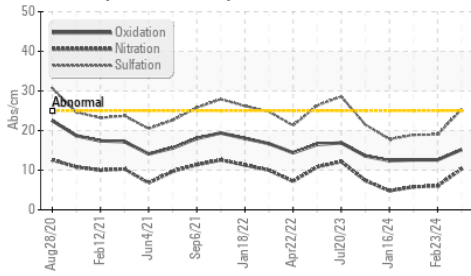


▲ Soot %

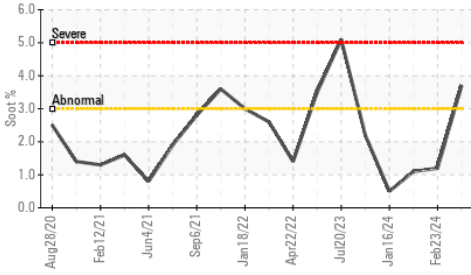


Fuel Dilution

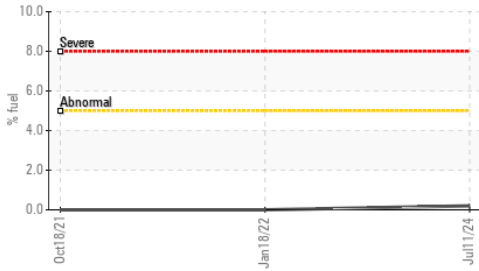

Base Number

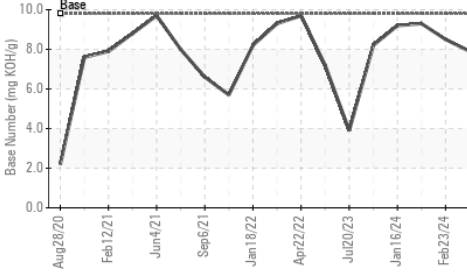

Viscosity @ 100°C

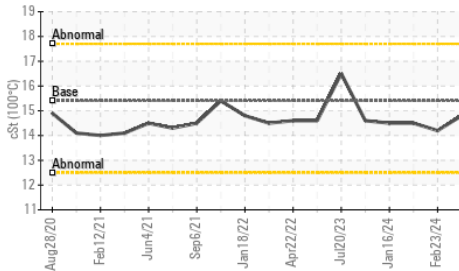


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.8	14.2

GRAPHS


Ferrous Alloys

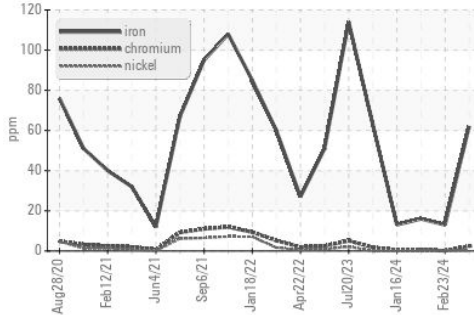


Non-ferrous Metals

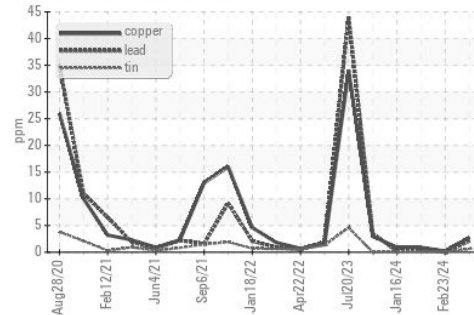

Viscosity @ 100°C

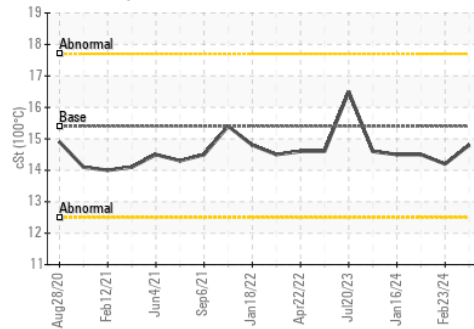

Base Number

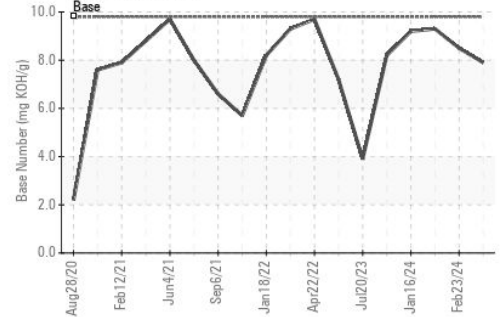

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0127194

Lab Number : 06235580

Unique Number : 11124414

Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 15 Jul 2024

Tested : 17 Jul 2024

Diagnosed : 17 Jul 2024 - Jonathan Hester

GFL Environmental - 652 - Fredericksburg Hauling

10954 Houser Drive

Fredericksburg, VA

US 22408

Contact: WILLIAM MILO

wmilo@gflenv.com

T:

F: