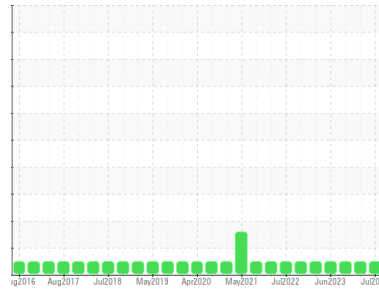


OIL ANALYSIS REPORT



Machine Id
KOMATSU HD465-5 60 (S/N 4963)
 Component
Diesel Engine
 Fluid
FLEETLINE SUPERFLEET XHD 15W40 (14 GAL)

Sample Rating Trend



NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0110133	LP0000878	LP0000858
Sample Date	Client Info			01 Jul 2024	26 Feb 2024	15 Dec 2023
Machine Age	hrs	Client Info		31680	31138	31138
Oil Age	hrs	Client Info		466	75	383
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	12	3	11
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	<1	2
Lead	ppm	ASTM D5185m	>40	2	1	0
Copper	ppm	ASTM D5185m	>330	2	0	<1
Tin	ppm	ASTM D5185m	>15	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0

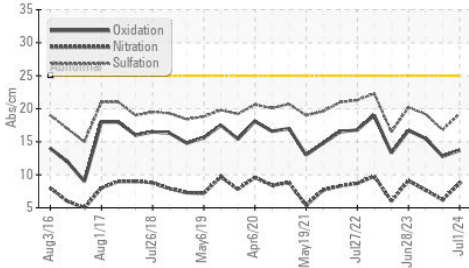
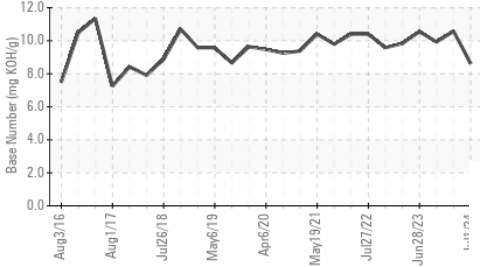
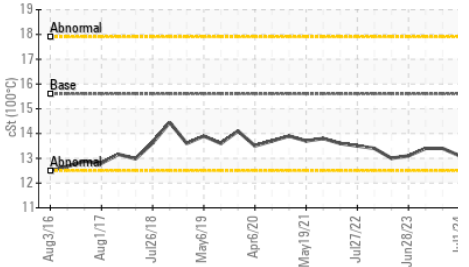
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		13	23	14
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		34	55	62
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		359	656	879
Calcium	ppm	ASTM D5185m		1895	1457	1180
Phosphorus	ppm	ASTM D5185m		953	1053	943
Zinc	ppm	ASTM D5185m		1194	1223	1242
Sulfur	ppm	ASTM D5185m		3242	3489	3183

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	3	2	4
Sodium	ppm	ASTM D5185m		<1	1	<1
Potassium	ppm	ASTM D5185m	>20	1	<1	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6	0.1	0.4
Nitration	Abs/cm	*ASTM D7624	>20	8.7	6.2	7.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.2	16.8	19.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.7	12.8	15.5
Base Number (BN)	mg KOH/g	ASTM D2896		8.63	10.57	9.93

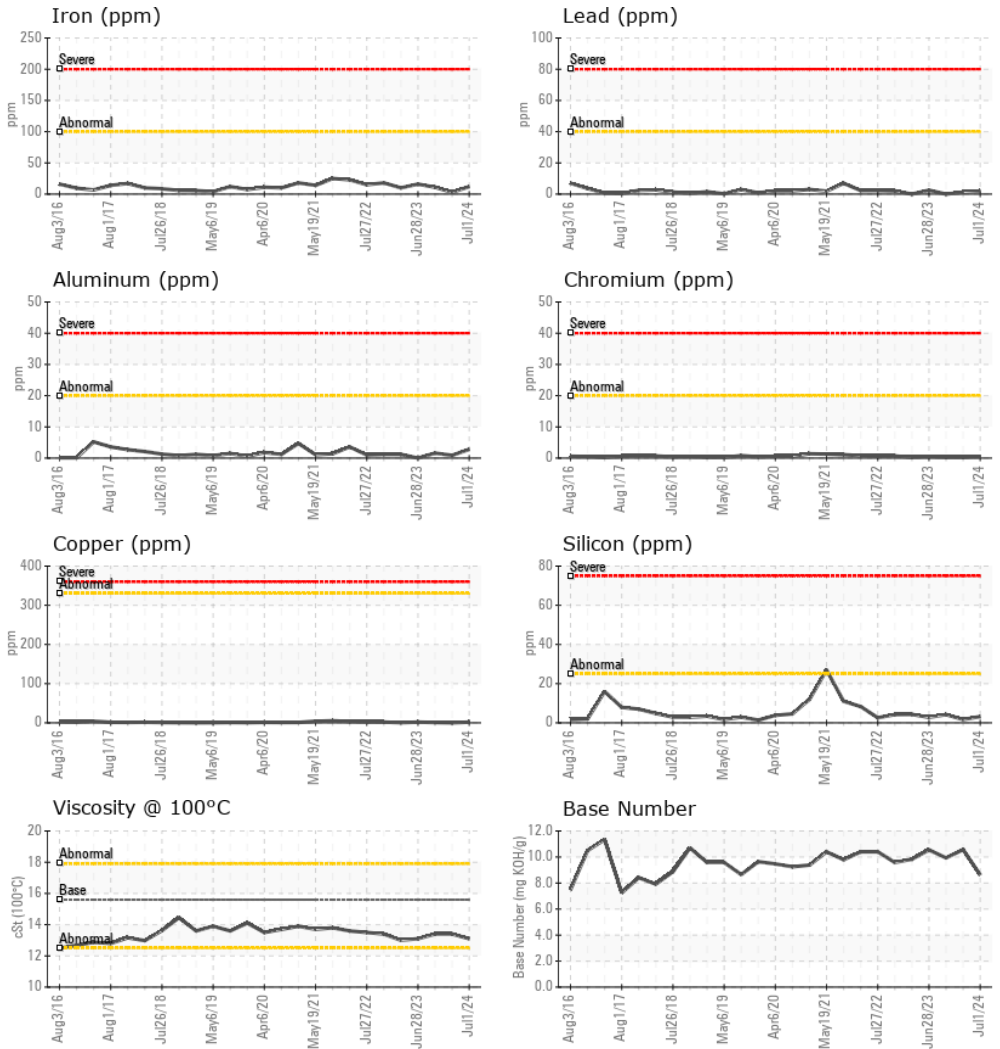
OIL ANALYSIS REPORT

FT-IR (Direct Trend)

Base Number

Viscosity @ 100°C


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.6	13.1	13.4

GRAPHS



Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0110133
Lab Number : 06237061
Unique Number : 11125895
Test Package : MOB 2

Received : 15 Jul 2024
Tested : 17 Jul 2024
Diagnosed : 17 Jul 2024 - Wes Davis

S.M. LORUSSO & SONS
 221 NORFOLK ST.
 WALPOLE, MA
 US 02081

Contact: PAUL BECKMAN
 pbeckman@smlorusso.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (508)668-2603

F: (508)660-0232