


# OIL ANALYSIS REPORT

Sample Rating Trend



**WEAR**

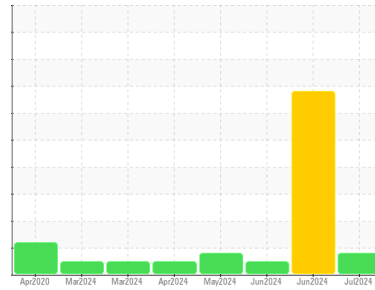

Machine Id

**L-56**

Component

**Rear Differential**

Fluid

**PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

### Wear

Gear wear is indicated.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0128761</b>	PCA0128746	PCA0123794
Sample Date	Client Info		<b>09 Jul 2024</b>	27 Jun 2024	05 Jun 2024
Machine Age	hrs	Client Info	<b>18037</b>	17836	17415
Oil Age	hrs	Client Info	<b>500</b>	500	34
Oil Changed		Client Info	<b>Not Chngd</b>	Not Chngd	Changed
Sample Status			<b>ABNORMAL</b>	SEVERE	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>▲ 735</b>	▲ 1559	236
Chromium	ppm	ASTM D5185m >10	<b>2</b>	▲ 4	1
Nickel	ppm	ASTM D5185m >10	<b>&lt;1</b>	3	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>6</b>	12	11
Lead	ppm	ASTM D5185m >25	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >100	<b>47</b>	50	40
Tin	ppm	ASTM D5185m >10	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>15</b>	16	12
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>3</b>	2	6
Manganese	ppm	ASTM D5185m 0	<b>7</b>	14	2
Magnesium	ppm	ASTM D5185m 9	<b>19</b>	25	37
Calcium	ppm	ASTM D5185m 3114	<b>3056</b>	3066	2336
Phosphorus	ppm	ASTM D5185m 1099	<b>862</b>	917	829
Zinc	ppm	ASTM D5185m 1245	<b>1053</b>	1028	981
Sulfur	ppm	ASTM D5185m 7086	<b>4405</b>	5339	4476

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	<b>10</b>	19	10
Sodium	ppm	ASTM D5185m	<b>0</b>	1	<1
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	1

## FLUID DEGRADATION


	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 3.27	<b>0.85</b>	0.99	1.32

# OIL ANALYSIS REPORT


## ▲ Ferrous Alloys

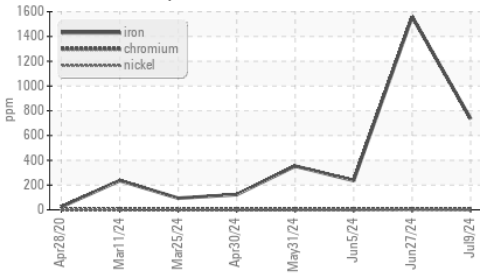

## Acid Number

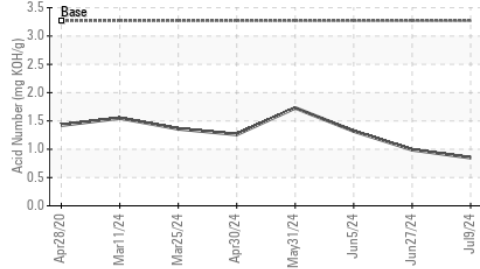

## Viscosity @ 40°C

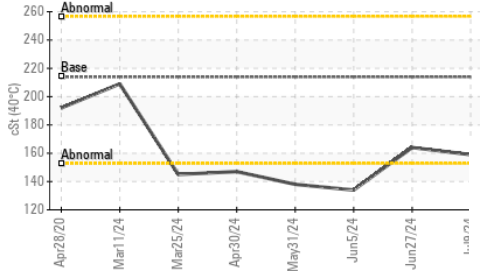

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	MODER	MODER
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	213.9	159	164

## SAMPLE IMAGES


method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

## GRAPHS


### ▲ Iron (ppm)

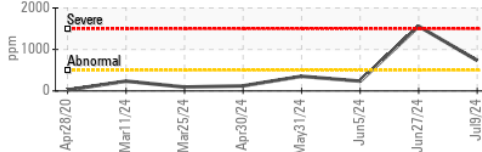


### Aluminum (ppm)

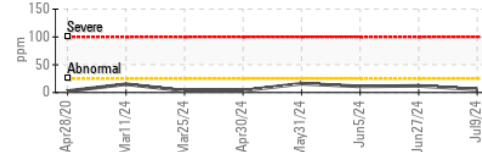


### Copper (ppm)

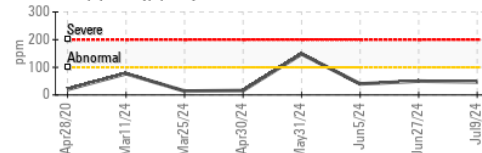

### Viscosity @ 40°C

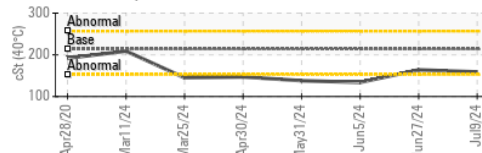


### Lead (ppm)

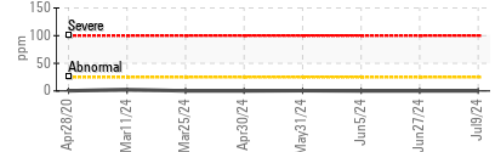


### Chromium (ppm)



### Silicon (ppm)

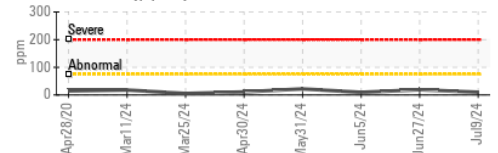

### Acid Number

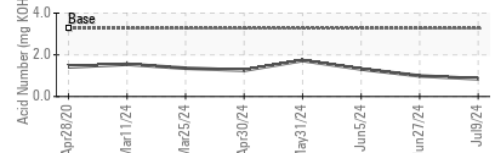

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : PCA0128761

**Lab Number** : 06237132

**Unique Number** : 11125966

**Test Package** : MOB 2

**Received** : 15 Jul 2024

**Tested** : 19 Jul 2024

**Diagnosed** : 19 Jul 2024 - Jonathan Hester

**SCRAP METAL SERVICES (SMS Mill Services LLC)**

1500 COMMERCIAL AVE

MINGO JUNCTION, OH

US 43938

Contact: STAN MANN

smann@scrapmetalservices.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)