




# OIL ANALYSIS REPORT



Area  
**(BD38783)**  
 Machine Id  
**713023**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (38 QTS)**

Sample Rating Trend

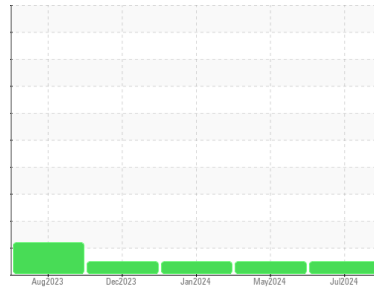

**NORMAL**

## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0120911</b>	GFL0120869	GFL0110360
Sample Date	Client Info		<b>11 Jul 2024</b>	31 May 2024	31 Jan 2024
Machine Age	hrs	Client Info	<b>3181</b>	380	380
Oil Age	hrs	Client Info	<b>2801</b>	0	600
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>32</b>	25	43
Chromium	ppm	ASTM D5185m >20	<b>1</b>	<1	2
Nickel	ppm	ASTM D5185m >5	<b>5</b>	5	14
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	4	<1
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>9</b>	10	40
Tin	ppm	ASTM D5185m >15	<b>2</b>	1	3
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	<1	5
Barium	ppm	ASTM D5185m 0	<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m 60	<b>62</b>	66	69
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	2
Magnesium	ppm	ASTM D5185m 1010	<b>935</b>	931	949
Calcium	ppm	ASTM D5185m 1070	<b>1114</b>	1135	1070
Phosphorus	ppm	ASTM D5185m 1150	<b>1046</b>	973	871
Zinc	ppm	ASTM D5185m 1270	<b>1279</b>	1258	1218
Sulfur	ppm	ASTM D5185m 2060	<b>2954</b>	2819	2172

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	4	9
Sodium	ppm	ASTM D5185m	<b>6</b>	0	0
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	3	3

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>1.2</b>	0.8	1.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.5</b>	9.5	11.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.7</b>	21.2	23.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.4</b>	17.0	19.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>5.9</b>	6.5	4.5







# OIL ANALYSIS REPORT

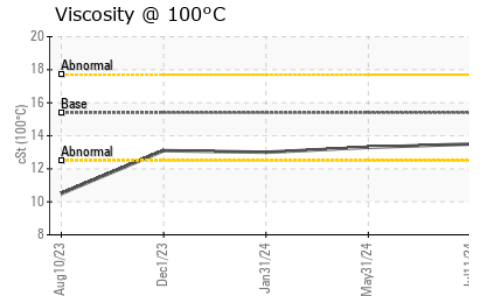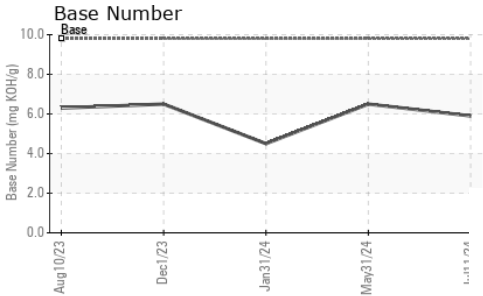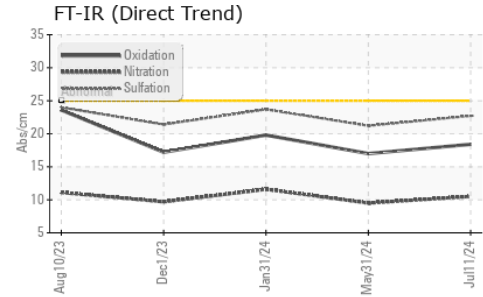

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	13.3

## GRAPHS

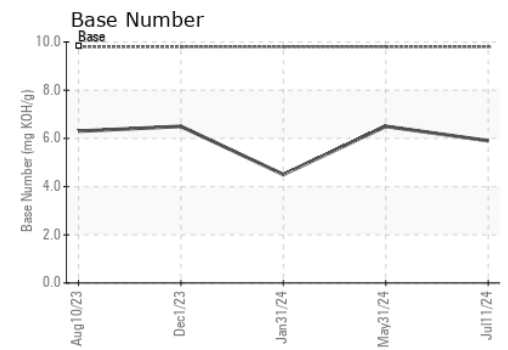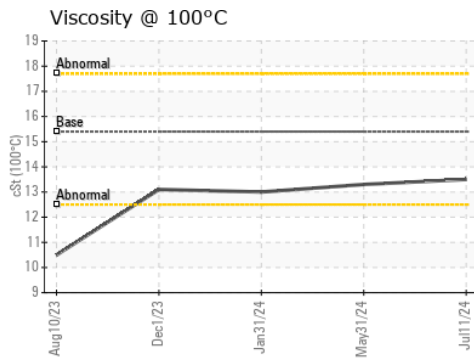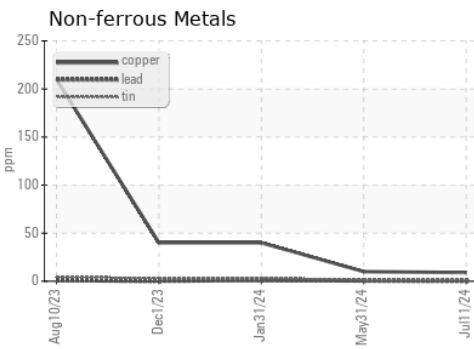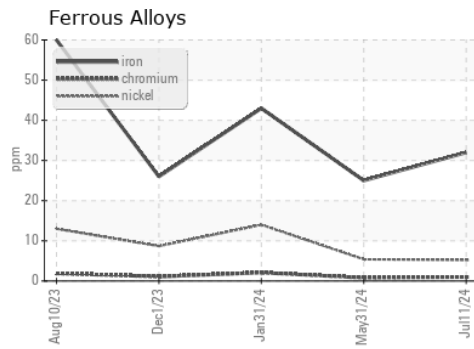

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0120911      **Received** : 15 Jul 2024  
**Lab Number** : **06237317**      **Tested** : 17 Jul 2024  
**Unique Number** : 11126151      **Diagnosed** : 17 Jul 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 622 - Traverse City Hauling**  
 160 Hughes Dr  
 Traverse City, MI  
 US 49686  
 Contact: TECHNICIAN ACCOUNT  
 aw.tc.maint@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)