




OIL ANALYSIS REPORT

Sample Rating Trend

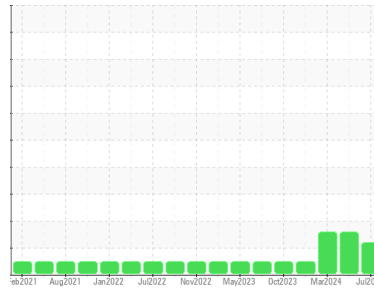

GLYCOL



Area
(BC14412)
 Machine Id
929017-1271
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (46 QTS)

DIAGNOSIS

▲ Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | GFL0120898 | GFL0110327 | GFL0110282 |
| Sample Date | Client Info | | | 11 Jul 2024 | 11 Apr 2024 | 04 Mar 2024 |
| Machine Age | hrs | Client Info | | 15881 | 13568 | 13568 |
| Oil Age | hrs | Client Info | | 2313 | 600 | 0 |
| Oil Changed | Client Info | | | Changed | Changed | Not Changed |
| Sample Status | | | | ABNORMAL | ABNORMAL | ABNORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel | WC Method | >3.0 | | <1.0 | <1.0 | 1.0 |
| Water | WC Method | >0.2 | | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >90 | 13 | 21 | 15 |
| Chromium | ppm | ASTM D5185m | >20 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 2 | 1 | 1 |
| Lead | ppm | ASTM D5185m | >40 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >330 | 0 | <1 | <1 |
| Tin | ppm | ASTM D5185m | >15 | 0 | <1 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | <1 | <1 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m | 0 | 0 | 4 | 5 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 60 | 66 | 64 | 66 |
| Manganese | ppm | ASTM D5185m | 0 | 0 | 0 | <1 |
| Magnesium | ppm | ASTM D5185m | 1010 | 842 | 821 | 824 |
| Calcium | ppm | ASTM D5185m | 1070 | 1063 | 1057 | 1057 |
| Phosphorus | ppm | ASTM D5185m | 1150 | 1042 | 907 | 853 |
| Zinc | ppm | ASTM D5185m | 1270 | 1216 | 1087 | 1068 |
| Sulfur | ppm | ASTM D5185m | 2060 | 3432 | 3036 | 2656 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|--------------|--------------|--------------|
| Silicon | ppm | ASTM D5185m | >25 | 6 | 4 | 3 |
| Sodium | ppm | ASTM D5185m | | ▲ 268 | ▲ 157 | ▲ 118 |
| Potassium | ppm | ASTM D5185m | >20 | 9 | 24 | 4 |
| Glycol | % | *ASTM D2982 | | NEG | NEG | NEG |


| INFRA-RED | | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 | >6 | 0.5 | 0.8 | 0.5 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 8.6 | 8.9 | 7.5 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 19.5 | 19.9 | 18.7 |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 14.3 | 15.0 | 13.5 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.8 | 8.2 | 7.2 | 7.9 |




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

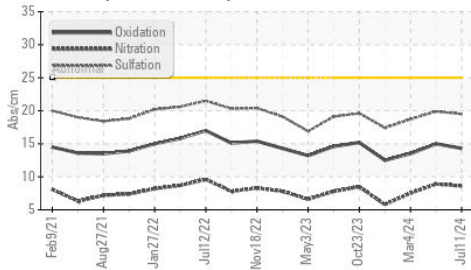


Glycol Contamination

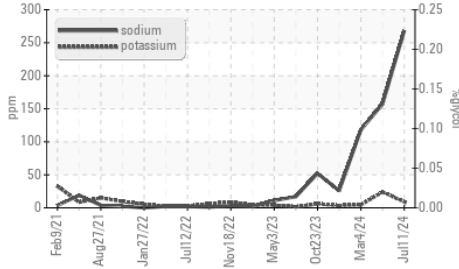

Viscosity @ 100°C

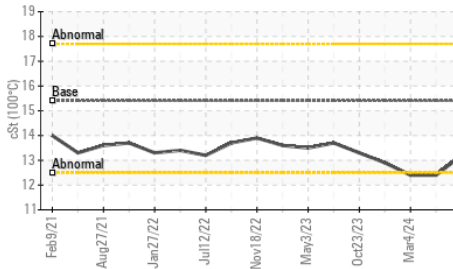

Glycol Contamination

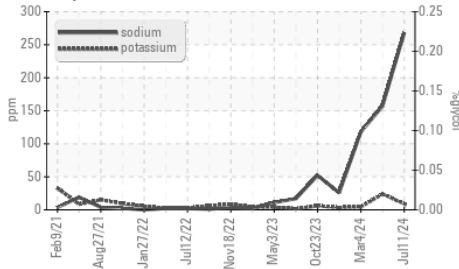


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|---------------|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 13.2 | ▲ 12.4 ▲ 12.4 |

GRAPHS


Ferrous Alloys

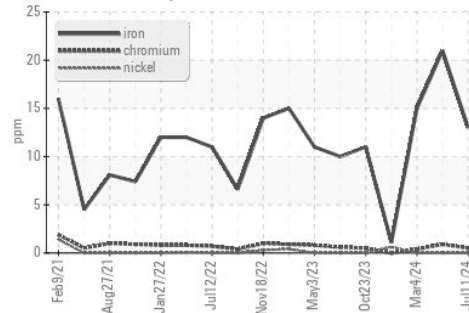


Non-ferrous Metals

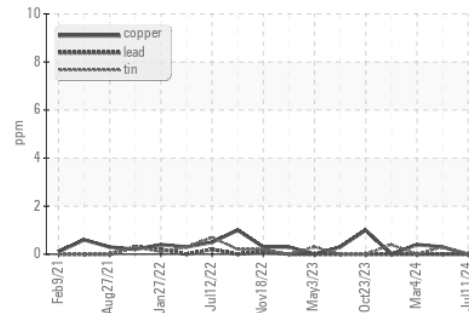

Viscosity @ 100°C

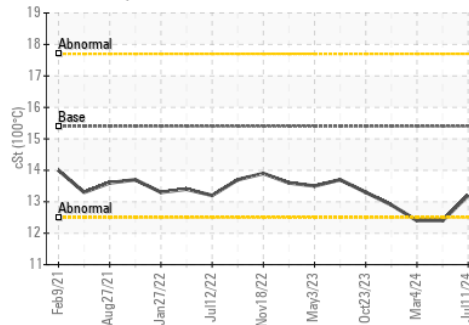

Base Number

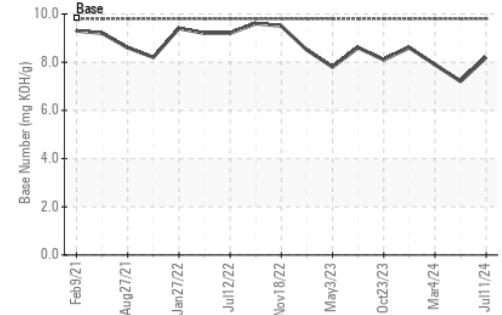

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0120898

Lab Number : 06237320

Unique Number : 11126154

Test Package : FLEET (Additional Tests: Glycol)

Received : 15 Jul 2024

Tested : 18 Jul 2024

Diagnosed : 18 Jul 2024 - Jonathan Hester

GFL Environmental - 622 - Traverse City Hauling

160 Hughes Dr

Traverse City, MI

US 49686

Contact: GARY BREWER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: