




OIL ANALYSIS REPORT

Sample Rating Trend

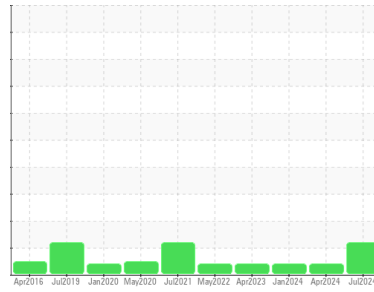

FUEL



Area
(ECE193)

Machine Id
11163

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (8 GAL)

DIAGNOSIS

● Recommendation

Resample at the next service interval to monitor.

● Wear

All component wear rates are normal.

▲ Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

● Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0089617	GFL0089626	GFL0089641
Sample Date	Client Info		12 Jul 2024	24 Apr 2024	17 Jan 2024
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			ATTENTION	ATTENTION	ATTENTION

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	34	28	20
Chromium	ppm	ASTM D5185m >20	<1	1	1
Nickel	ppm	ASTM D5185m >2	0	0	0
Titanium	ppm	ASTM D5185m >2	0	<1	<1
Silver	ppm	ASTM D5185m >2	0	<1	0
Aluminum	ppm	ASTM D5185m >25	3	4	2
Lead	ppm	ASTM D5185m >40	3	5	2
Copper	ppm	ASTM D5185m >330	2	3	2
Tin	ppm	ASTM D5185m >15	<1	2	1
Vanadium	ppm	ASTM D5185m	0	<1	<1
Cadmium	ppm	ASTM D5185m	0	<1	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	11	11	10
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	64	69	53
Manganese	ppm	ASTM D5185m 0	0	<1	<1
Magnesium	ppm	ASTM D5185m 1010	910	977	938
Calcium	ppm	ASTM D5185m 1070	1088	1138	1006
Phosphorus	ppm	ASTM D5185m 1150	881	1153	986
Zinc	ppm	ASTM D5185m 1270	1218	1276	1143
Sulfur	ppm	ASTM D5185m 2060	2671	3099	2840

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	5	7	4
Sodium	ppm	ASTM D5185m	0	<1	2
Potassium	ppm	ASTM D5185m >20	2	4	1
Fuel	%	ASTM D3524 >5	▲ 2.8	<1.0	<1.0

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.4	0.4	0.4
Nitration	Abs/cm	*ASTM D7624 >20	7.6	7.0	7.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.1	18.5	18.7


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.5	14.2	14.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.6	7.5	7.5




OIL ANALYSIS REPORT


▲ Fuel Dilution

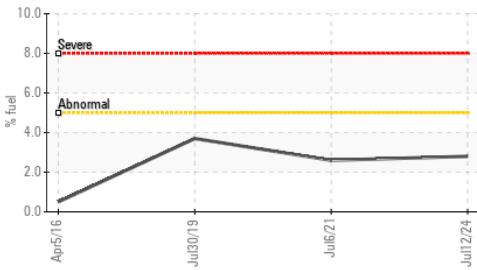


● FT-IR (Direct Trend)

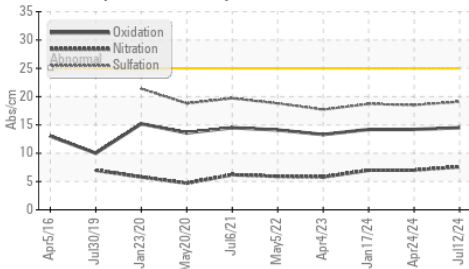

● FT-IR (Direct Trend)

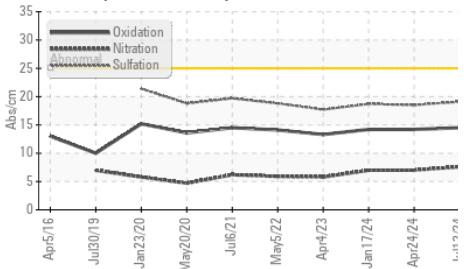

● Base Number

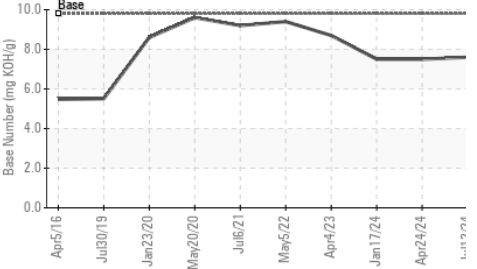


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ● 11.1	11.6	11.1

GRAPHS


● Ferrous Alloys

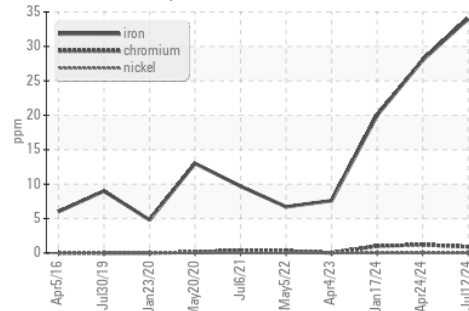


● Non-ferrous Metals

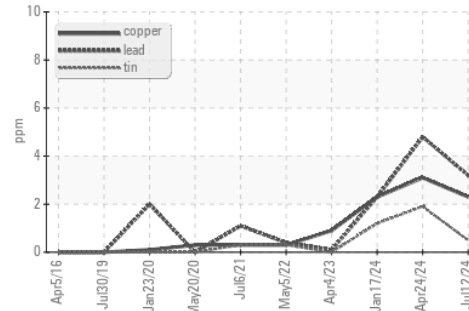

● Viscosity @ 100°C

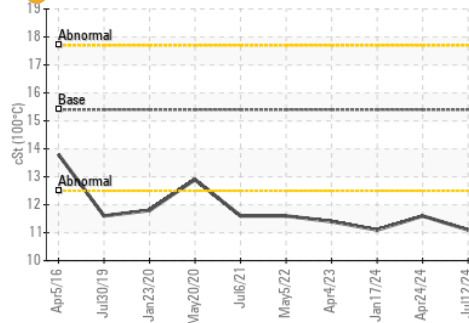

● Base Number

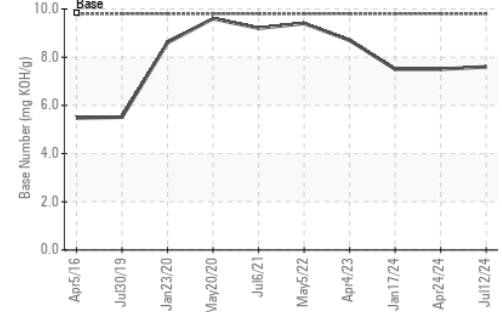

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0089617

Lab Number : 06237623

Unique Number : 11126457

Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

Received : 16 Jul 2024

Tested : 18 Jul 2024

Diagnosed : 18 Jul 2024 - Don Baldrige

GFL Environmental - 732 - Thomaston Hauling

2616 Waymansville Road

Thomaston, GA

US 30286

Contact: Michael Taft

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: