


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

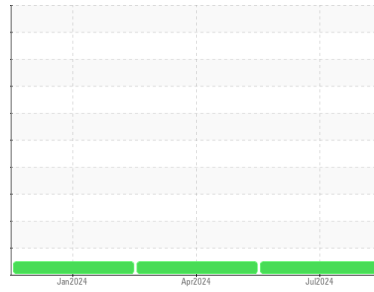

Machine Id  
**312**  
 Component  
**Diesel Engine**  
 Fluid  
**RED GIANT LOCOMOTIVE EO 20W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0092714</b>	PCA0092766	PCA0092702
Sample Date	Client Info			<b>01 Jul 2024</b>	03 Apr 2024	08 Jan 2024
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.20		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>26</b>	31	24
Chromium	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>2</b>	<1	3
Lead	ppm	ASTM D5185m	>75	<b>5</b>	5	5
Copper	ppm	ASTM D5185m	>90	<b>11</b>	12	14
Tin	ppm	ASTM D5185m	>30	<b>1</b>	<1	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>34</b>	36	28
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>38</b>	38	36
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	1
Magnesium	ppm	ASTM D5185m		<b>11</b>	12	25
Calcium	ppm	ASTM D5185m		<b>3276</b>	3561	2977
Phosphorus	ppm	ASTM D5185m	0	<b>12</b>	0	8
Zinc	ppm	ASTM D5185m	0	<b>16</b>	0	18
Sulfur	ppm	ASTM D5185m	1900	<b>3541</b>	3919	2812

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>17	<b>7</b>	8	8
Sodium	ppm	ASTM D5185m		<b>27</b>	36	34
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.9	0.8
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.1</b>	8.7	8.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>15.6</b>	16.1	15.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>7.7</b>	8.5	8.1
Base Number (BN)	mg KOH/g	ASTM D2896	11	<b>9.18</b>	9.59	10.14









# OIL ANALYSIS REPORT

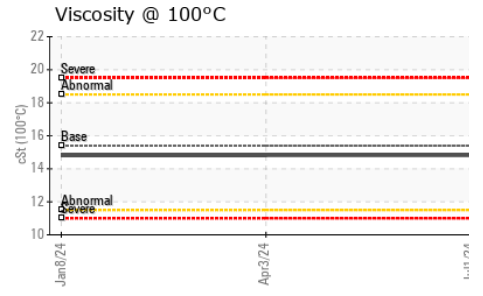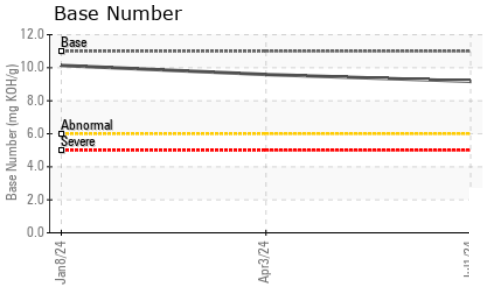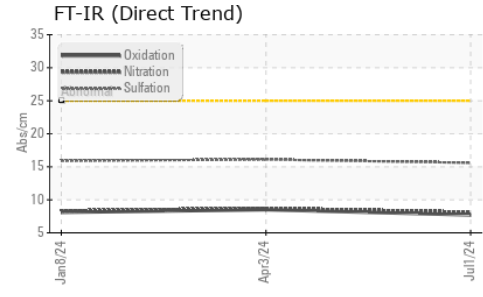

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.20	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.8</b>	14.8	14.8

## GRAPHS

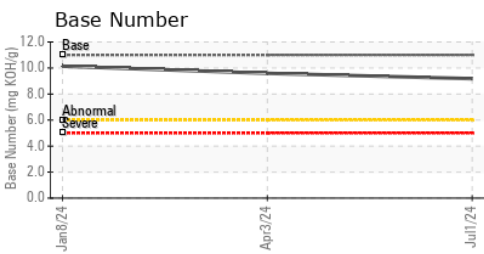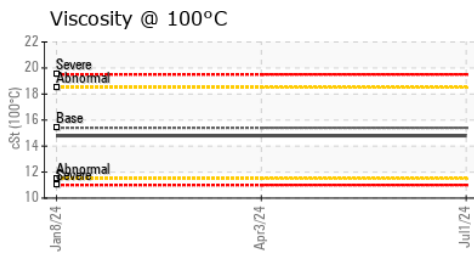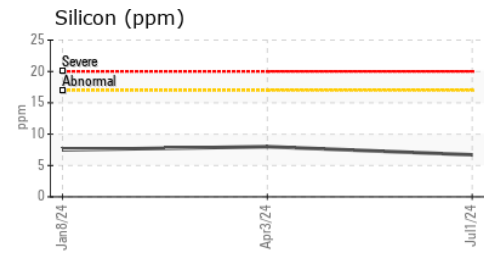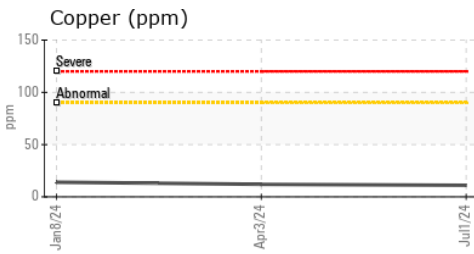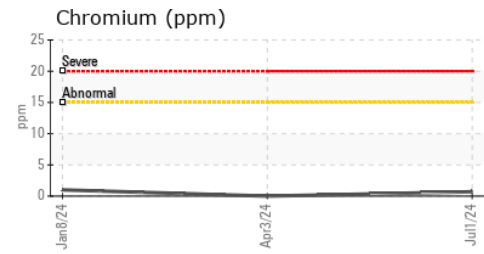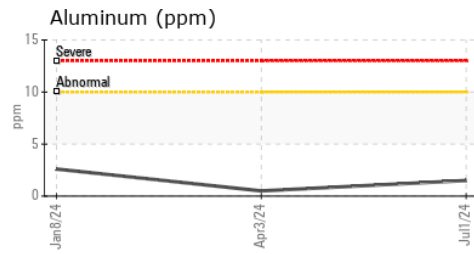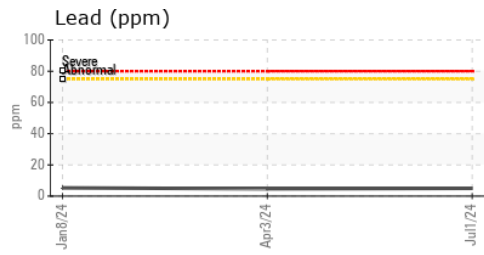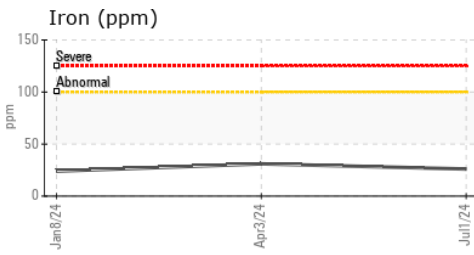

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0092714      **Received** : 16 Jul 2024  
**Lab Number** : **06238009**      **Tested** : 17 Jul 2024  
**Unique Number** : 11126843      **Diagnosed** : 17 Jul 2024 - Wes Davis  
**Test Package** : MOB 2

**U.S. SUGAR CORP**  
 1731 S W.C. OWEN AVENUE  
 CLEWISTON, FL  
 US 33440-3032  
 Contact: JAMES MCGROGAN  
 jmcgrogan@ussugar.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)