




OIL ANALYSIS REPORT

Machine Id
420094
 Component
2 Differential
 Fluid
 {not provided} (--- GAL)

Sample Rating Trend

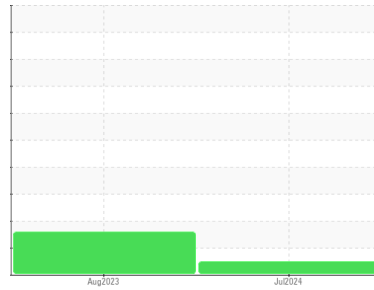

NORMAL

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. (Customer Sample Comment: 2nd Axle / Tag)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0128760	GFL0089398	---
Sample Date	Client Info		10 Jul 2024	15 Aug 2023	---
Machine Age	mls	Client Info	134054	109690	---
Oil Age	mls	Client Info	134054	109690	---
Oil Changed	Client Info		Not Chngd	Changed	---
Sample Status			NORMAL	ABNORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >1200	253	375	---
Chromium	ppm	ASTM D5185m >8	1	3	---
Nickel	ppm	ASTM D5185m >20	8	13	---
Titanium	ppm	ASTM D5185m >4	<1	<1	---
Silver	ppm	ASTM D5185m	0	0	---
Aluminum	ppm	ASTM D5185m >30	5	17	---
Lead	ppm	ASTM D5185m >25	0	0	---
Copper	ppm	ASTM D5185m >50	<1	1	---
Tin	ppm	ASTM D5185m >5	0	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	30	126	---
Barium	ppm	ASTM D5185m	0	1	---
Molybdenum	ppm	ASTM D5185m	0	0	---
Manganese	ppm	ASTM D5185m	3	6	---
Magnesium	ppm	ASTM D5185m	1	5	---
Calcium	ppm	ASTM D5185m	21	65	---
Phosphorus	ppm	ASTM D5185m	591	970	---
Zinc	ppm	ASTM D5185m	12	29	---
Sulfur	ppm	ASTM D5185m	20163	22036	---

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >230	70	▲ 339	---
Sodium	ppm	ASTM D5185m	1	4	---
Potassium	ppm	ASTM D5185m >20	1	2	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual NONE	NONE	NONE	---
Precipitate	scalar	*Visual NONE	NONE	NONE	---
Silt	scalar	*Visual NONE	NONE	NONE	---
Debris	scalar	*Visual NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	---
Appearance	scalar	*Visual NORML	NORML	NORML	---
Odor	scalar	*Visual NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual >.2	NEG	NEG	---
Free Water	scalar	*Visual	NEG	NEG	---



OIL ANALYSIS REPORT

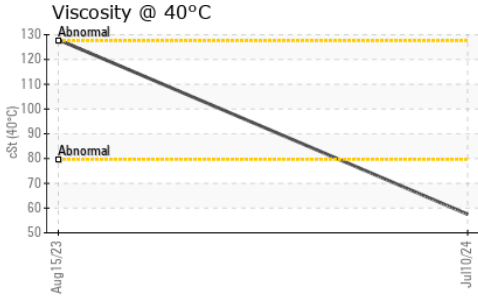




FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445	57.5	128	---

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

GRAPHS

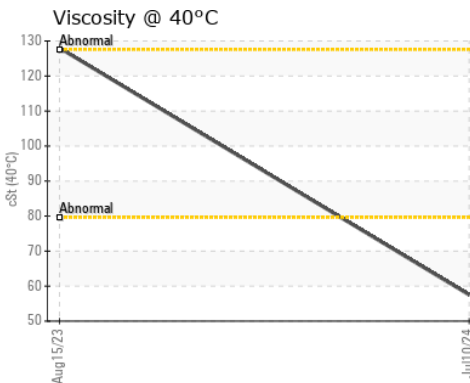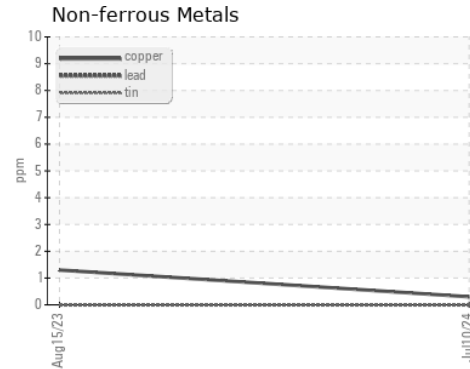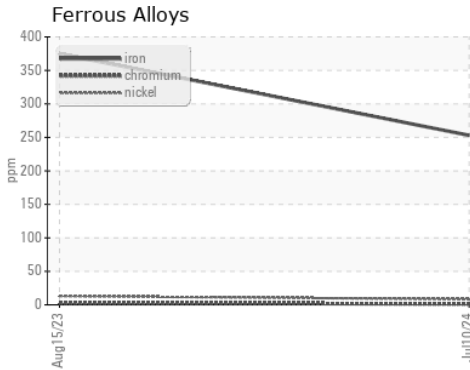

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0128760
Lab Number : 06238247
Unique Number : 11127081
Test Package : FLEET

Received : 16 Jul 2024
Tested : 17 Jul 2024
Diagnosed : 18 Jul 2024 - Sean Felton

GFL Environmental - 983 - Sugar Land Hauling
 16011 West Belfort Street
 Sugar Land, TX
 US 77498
 Contact: TECHNICIAN ACCOUNT
 wcgfldemo@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: