




OIL ANALYSIS REPORT

Sample Rating Trend

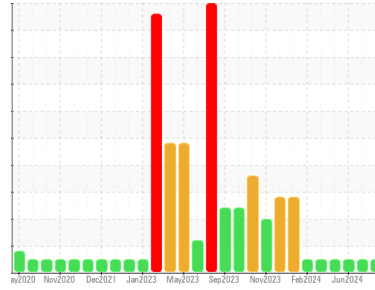

NORMAL



Machine Id
820018-101303

Component
Diesel Engine

Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | GFL0122947 | GFL0122943 | GFL0122955 |
| Sample Date | Client Info | 16 Jul 2024 | 30 Jun 2024 | 03 Jun 2024 |
| Machine Age | hrs | 10307 | 10230 | 10079 |
| Oil Age | hrs | 0 | 0 | 0 |
| Oil Changed | Client Info | N/A | N/A | N/A |
| Sample Status | | NORMAL | NORMAL | NORMAL |

CONTAMINATION

| method | limit/base | current | history1 | history2 |
|--------|----------------|----------------|----------|----------|
| Fuel | WC Method >5 | <1.0 | <1.0 | <1.0 |
| Water | WC Method >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | NEG | NEG | NEG |

WEAR METALS

| method | limit/base | current | history1 | history2 |
|----------|----------------------|--------------|----------|----------|
| Iron | ppm ASTM D5185m >100 | 11 | 9 | 22 |
| Chromium | ppm ASTM D5185m >20 | <1 | <1 | 2 |
| Nickel | ppm ASTM D5185m >4 | <1 | <1 | 0 |
| Titanium | ppm ASTM D5185m | <1 | <1 | 0 |
| Silver | ppm ASTM D5185m >3 | <1 | <1 | 0 |
| Aluminum | ppm ASTM D5185m >20 | 3 | 3 | 3 |
| Lead | ppm ASTM D5185m >40 | <1 | <1 | 0 |
| Copper | ppm ASTM D5185m >330 | 2 | 1 | 2 |
| Tin | ppm ASTM D5185m >15 | <1 | <1 | 0 |
| Vanadium | ppm ASTM D5185m | <1 | <1 | 0 |
| Cadmium | ppm ASTM D5185m | <1 | <1 | 0 |

ADDITIVES

| method | limit/base | current | history1 | history2 |
|------------|----------------------|--------------|----------|----------|
| Boron | ppm ASTM D5185m | 26 | 32 | 13 |
| Barium | ppm ASTM D5185m | 0 | <1 | 0 |
| Molybdenum | ppm ASTM D5185m | 78 | 82 | 71 |
| Manganese | ppm ASTM D5185m | <1 | <1 | <1 |
| Magnesium | ppm ASTM D5185m | 884 | 904 | 959 |
| Calcium | ppm ASTM D5185m | 1064 | 1117 | 1184 |
| Phosphorus | ppm ASTM D5185m 1360 | 930 | 912 | 1055 |
| Zinc | ppm ASTM D5185m 1480 | 1127 | 1152 | 1253 |
| Sulfur | ppm ASTM D5185m | 2602 | 2652 | 3359 |

CONTAMINANTS

| method | limit/base | current | history1 | history2 |
|-----------|---------------------|----------|----------|----------|
| Silicon | ppm ASTM D5185m >25 | 7 | 6 | 2 |
| Sodium | ppm ASTM D5185m | 9 | 8 | 27 |
| Potassium | ppm ASTM D5185m >20 | 5 | 6 | 3 |

INFRA-RED

| method | limit/base | current | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot % | % *ASTM D7844 >3 | 0.6 | 0.4 | 0.6 |
| Nitration | Abs/cm *ASTM D7624 >20 | 8.3 | 7.3 | 10.2 |
| Sulfation | Abs/.1mm *ASTM D7415 >30 | 20.3 | 19.4 | 22.5 |


FLUID DEGRADATION

| method | limit/base | current | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Oxidation | Abs/.1mm *ASTM D7414 >25 | 15.3 | 14.8 | 18.1 |
| Base Number (BN) | mg KOH/g ASTM D2896 12.2 | 8.4 | 8.3 | 7.4 |




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

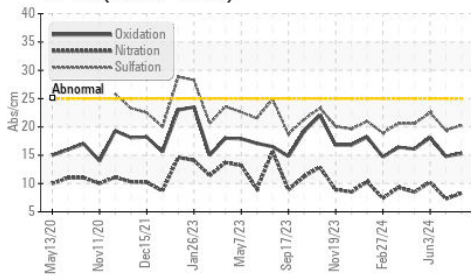

Base Number

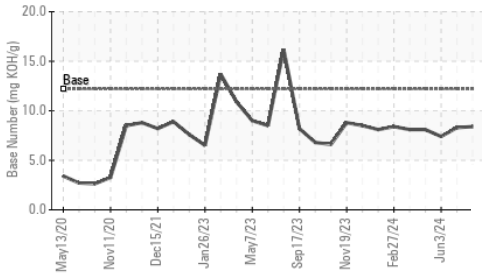

Viscosity @ 100°C

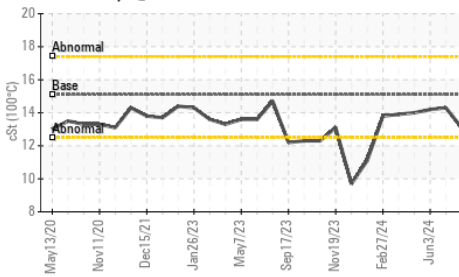


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 15.1 | 13.1 | 14.3 |

GRAPHS


Ferrous Alloys

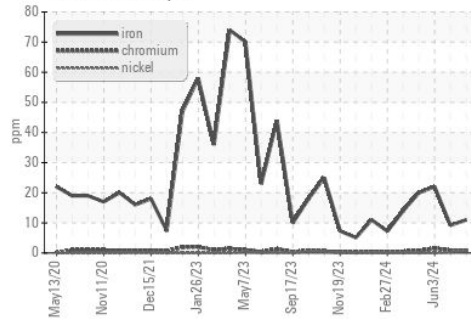


Non-ferrous Metals

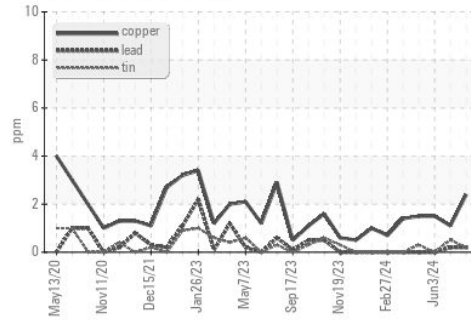

Viscosity @ 100°C

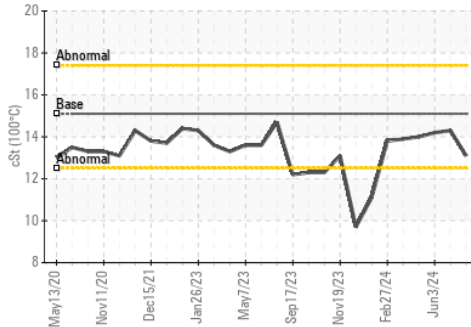

Base Number

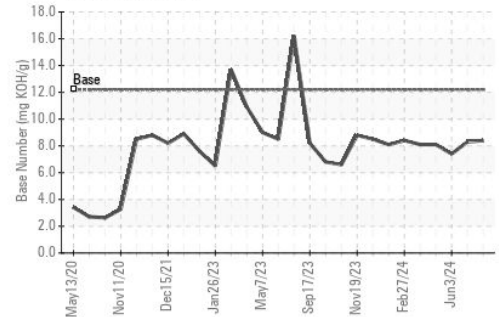

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0122947
Lab Number : 06238682
Unique Number : 11127516
Test Package : FLEET

Received : 16 Jul 2024
Tested : 17 Jul 2024
Diagnosed : 18 Jul 2024 - Sean Felton

GFL Environmental - 816 - WCA of South Arkansas
 3083 Smackover Hwy
 El Dorado, AR
 US 71730

Contact: Mike Howell
 mike.howell@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: