




OIL ANALYSIS REPORT



Area
(LZ2431)
Machine Id
2408
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (42 QTS)

Sample Rating Trend

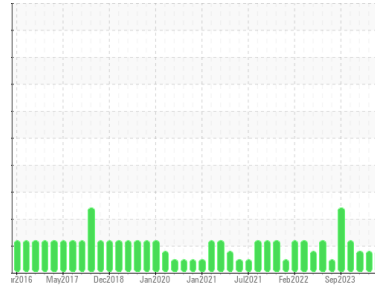

FUEL



DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0110414	GFL0094897	GFL0090142
Sample Date	Client Info	10 Jul 2024	20 May 2024	06 May 2024
Machine Age	hrs	17530	17148	17109
Oil Age	hrs	382	17148	17109
Oil Changed	Client Info	Not Changed	Changed	Not Changed
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>120	5	4	4
Chromium	ppm	ASTM D5185m	>20	<1	0	0
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	2	2
Lead	ppm	ASTM D5185m	>40	0	0	<1
Copper	ppm	ASTM D5185m	>330	6	2	<1
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	5	2	3
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	57	58	56
Manganese	ppm	ASTM D5185m	0	2	<1	<1
Magnesium	ppm	ASTM D5185m	1010	879	921	884
Calcium	ppm	ASTM D5185m	1070	1015	1038	1011
Phosphorus	ppm	ASTM D5185m	1150	990	1015	1007
Zinc	ppm	ASTM D5185m	1270	1182	1223	1192
Sulfur	ppm	ASTM D5185m	2060	3374	3461	3431

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	4	6	5
Sodium	ppm	ASTM D5185m		5	5	2
Potassium	ppm	ASTM D5185m	>20	2	1	2
Fuel	%	ASTM D3524	>3.0	▲ 3.6	▲ 3.6	▲ 3.7

INFRA-RED





method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>4	0.1	0.2	0.9
Nitration	Abs/cm	*ASTM D7624	>20	7.0	8.0	9.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.0	17.9	22.4

FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.1	15.0	18.8
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.3	7.4	6.5







OIL ANALYSIS REPORT

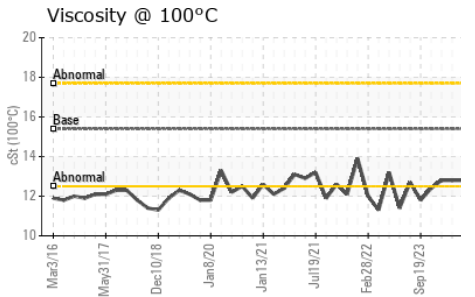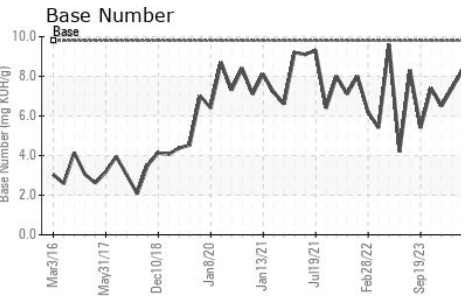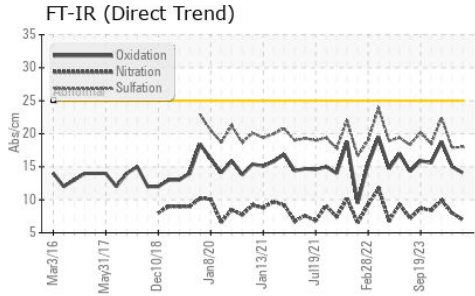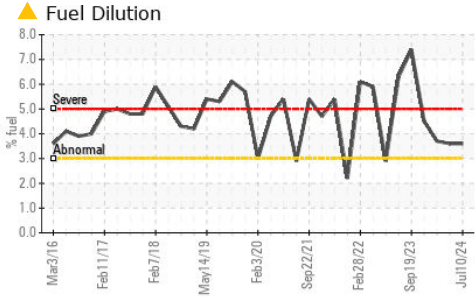

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.8	12.8

GRAPHS

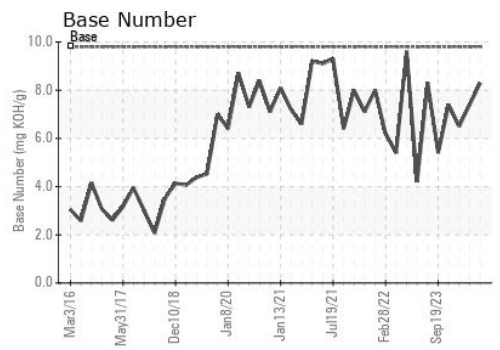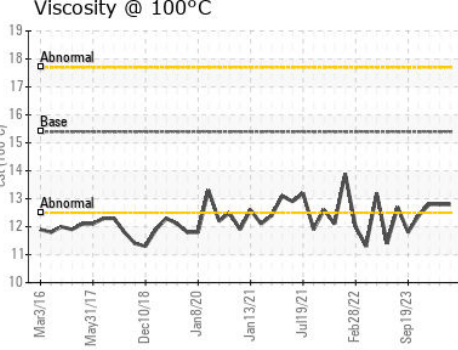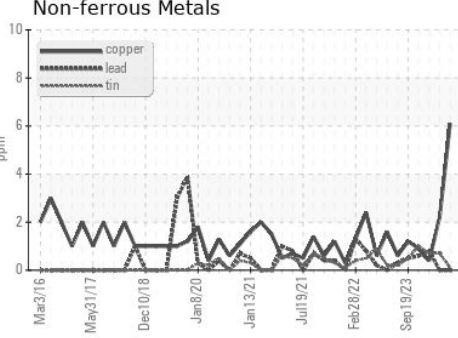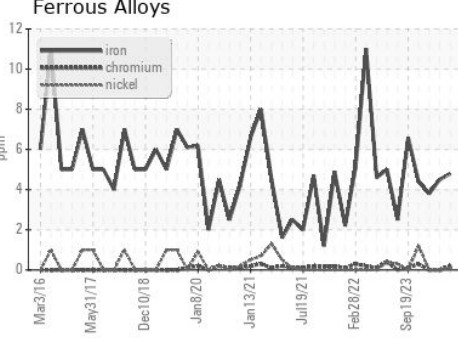

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0110414 **Received** : 17 Jul 2024
Lab Number : 06238785 **Tested** : 18 Jul 2024
Unique Number : 11127619 **Diagnosed** : 18 Jul 2024 - Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 044 - Elizabeth City
 657 Old US 17
 Elizabeth City, NC
 US 27909
 Contact: TOM BAIRD
 tom.baird@gflenv.com
 T: (252)562-2645
 F: (252)264-4411

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)