




# OIL ANALYSIS REPORT

Sample Rating Trend

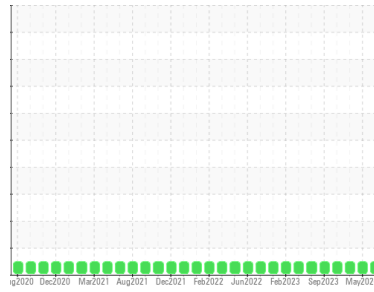

**NORMAL**



Area  
**(MB9146)**

Machine Id  
**910023**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (7 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0110416</b>	GFL0094894	GFL0090135
Sample Date	Client Info		<b>10 Jul 2024</b>	06 May 2024	15 Feb 2024
Machine Age	hrs	Client Info	<b>11170</b>	10548	9995
Oil Age	hrs	Client Info	<b>622</b>	10548	639
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >165	<b>11</b>	10	12
Chromium	ppm	ASTM D5185m >5	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	2
Lead	ppm	ASTM D5185m >150	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >90	<b>6</b>	0	<1
Tin	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>4</b>	3	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>59</b>	60	56
Manganese	ppm	ASTM D5185m 0	<b>2</b>	<1	0
Magnesium	ppm	ASTM D5185m 1010	<b>914</b>	924	936
Calcium	ppm	ASTM D5185m 1070	<b>1056</b>	1062	1018
Phosphorus	ppm	ASTM D5185m 1150	<b>1011</b>	1002	990
Zinc	ppm	ASTM D5185m 1270	<b>1224</b>	1235	1226
Sulfur	ppm	ASTM D5185m 2060	<b>3352</b>	3411	2956

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >35	<b>4</b>	3	3
Sodium	ppm	ASTM D5185m	<b>6</b>	4	4
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	1

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >7.5	<b>1.1</b>	0.9	0.7
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.2</b>	8.6	7.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.1</b>	20.8	19.4


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.3</b>	16.2	14.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.4</b>	8.2	8.5




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

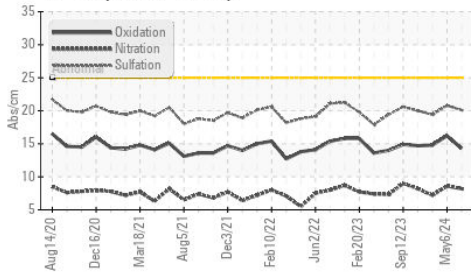

Base Number

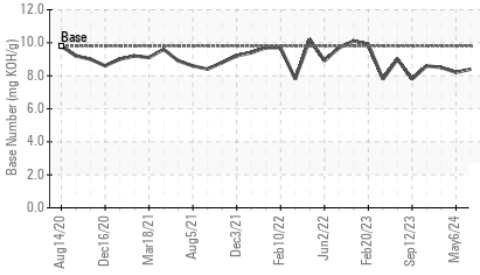

Viscosity @ 100°C

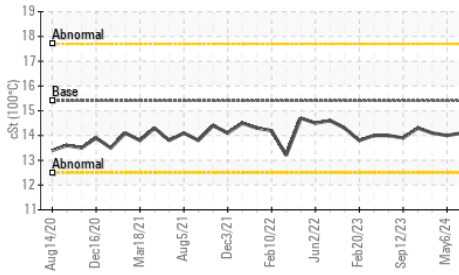


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.1	14.0

## GRAPHS


Ferrous Alloys

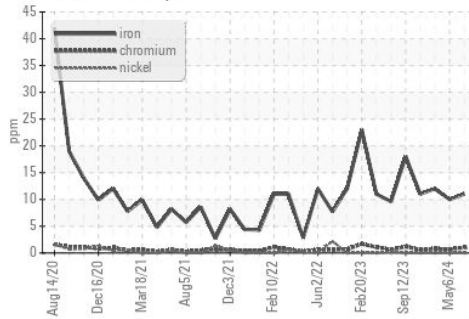


Non-ferrous Metals

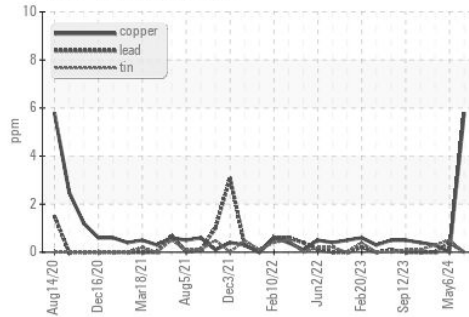

Viscosity @ 100°C

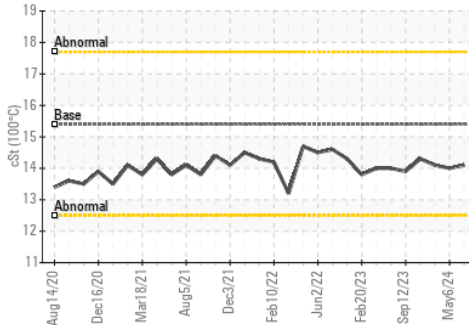

Base Number

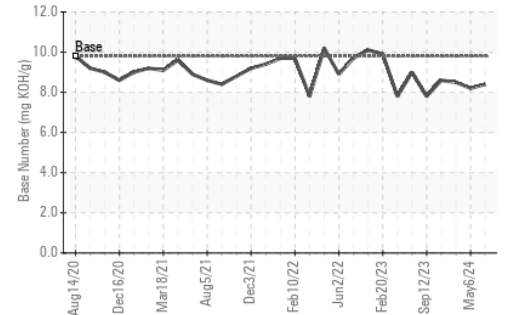

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0110416  
 Lab Number : 06238787  
 Unique Number : 11127621  
 Test Package : FLEET

Received : 17 Jul 2024  
 Tested : 17 Jul 2024  
 Diagnosed : 17 Jul 2024 - Wes Davis

GFL Environmental - 044 - Elizabeth City  
 657 Old US 17  
 Elizabeth City, NC  
 US 27909  
 Contact: TOM BAIRD  
 tom.baIRD@gflenv.com  
 T: (252)562-2645  
 F: (252)264-4411

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)