




# OIL ANALYSIS REPORT



Area  
 (62A1N7N) MONTGOMERY  
 Machine Id  
**MACK 428088**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

Sample Rating Trend

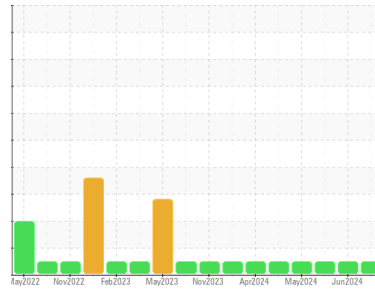

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0081935</b>	GFL0081927	GFL0080684
Sample Date	Client Info		<b>15 Jul 2024</b>	20 Jun 2024	23 May 2024
Machine Age	hrs	Client Info	<b>12147</b>	12017	11933
Oil Age	hrs	Client Info	<b>1483</b>	1353	1269
Oil Changed	Client Info		<b>Changed</b>	N/A	Not Changd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>10</b>	10	5
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	3	2
Lead	ppm	ASTM D5185m >40	<b>1</b>	1	0
Copper	ppm	ASTM D5185m >330	<b>4</b>	4	2
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>2</b>	4	4
Barium	ppm	ASTM D5185m 0	<b>&lt;1</b>	1	0
Molybdenum	ppm	ASTM D5185m 60	<b>61</b>	60	60
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m 1010	<b>922</b>	915	908
Calcium	ppm	ASTM D5185m 1070	<b>1074</b>	1062	1031
Phosphorus	ppm	ASTM D5185m 1150	<b>1033</b>	1077	957
Zinc	ppm	ASTM D5185m 1270	<b>1222</b>	1230	1189
Sulfur	ppm	ASTM D5185m 2060	<b>3045</b>	3173	3212

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	5	4
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	2	1
Potassium	ppm	ASTM D5185m >20	<b>6</b>	5	4

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.6</b>	0.5	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.5</b>	7.5	6.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.3</b>	18.7	18.2


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.0</b>	14.3	14.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.3</b>	8.5	9.0




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

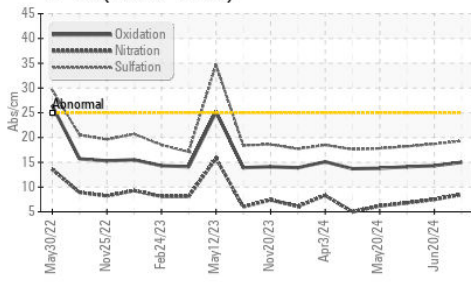

Base Number

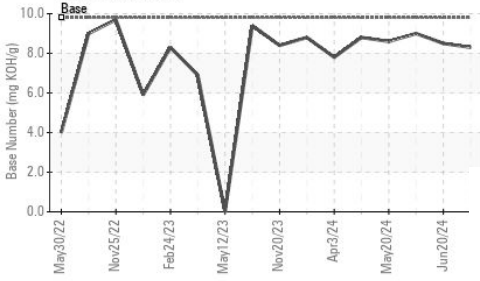

Viscosity @ 100°C

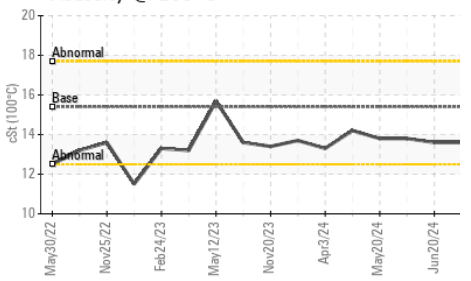


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.6	13.6

## GRAPHS


Ferrous Alloys

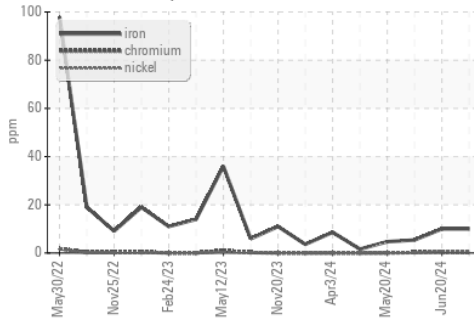


Non-ferrous Metals

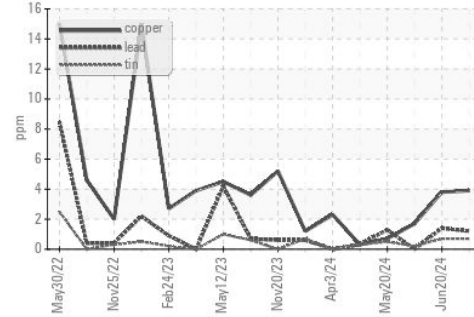

Viscosity @ 100°C

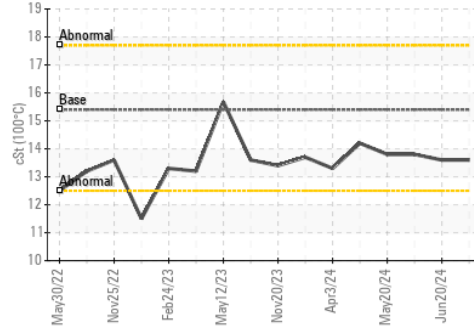

Base Number

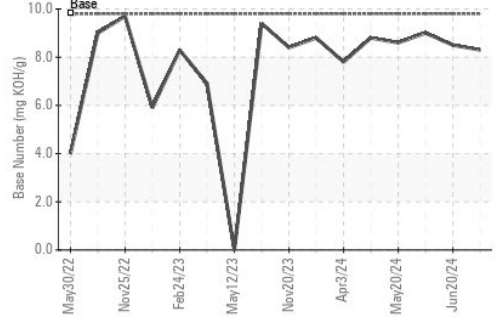

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0081935 **Received** : 17 Jul 2024  
**Lab Number** : 06238978 **Tested** : 18 Jul 2024  
**Unique Number** : 11127812 **Diagnosed** : 18 Jul 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 955 - Montgomery**  
 1121 Wilbanks St  
 Montgomery, AL  
 US 36108  
 Contact: LISA REEVES

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: