


# OIL ANALYSIS REPORT

Area  
**Charlestown**  
 Machine Id  
**636**  
 Component  
**Diesel Engine**  
 Fluid  
**{not provided} (--- GAL)**

Sample Rating Trend

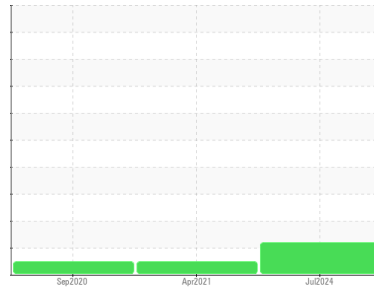

**VISUAL METAL**



## DIAGNOSIS

**Recommendation**  
 We suspect abnormal metal contamination may be due to sampling method. No corrective action is recommended at this time. Resample at the next service interval to monitor.

**Wear**  
 Moderate concentration of visible metal present. All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0122767</b>	PCA0041304	PCA0023330
Sample Date	Client Info	<b>11 Jul 2024</b>	28 Apr 2021	02 Sep 2020
Machine Age	mls Client Info	<b>502509</b>	136041	198789
Oil Age	mls Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	Changed	Changed
Sample Status		<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >200	<b>23</b>	9	10
Chromium	ppm ASTM D5185m >20	<b>2</b>	1	1
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	<1	<1
Aluminum	ppm ASTM D5185m >30	<b>7</b>	4	4
Lead	ppm ASTM D5185m >30	<b>&lt;1</b>	<1	0
Copper	ppm ASTM D5185m >30	<b>5</b>	3	7
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Antimony	ppm ASTM D5185m	<b>---</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>3</b>	0	6
Barium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Molybdenum	ppm ASTM D5185m	<b>64</b>	62	63
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m	<b>1000</b>	993	962
Calcium	ppm ASTM D5185m	<b>1158</b>	1099	1084
Phosphorus	ppm ASTM D5185m	<b>984</b>	1063	974
Zinc	ppm ASTM D5185m	<b>1302</b>	1278	1291
Sulfur	ppm ASTM D5185m	<b>2823</b>	2593	2479

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>5</b>	0	3
Sodium	ppm ASTM D5185m	<b>0</b>	0	2
Potassium	ppm ASTM D5185m >20	<b>3</b>	2	3
Fuel	% ASTM D3524 >3.0	<b>&lt;1.0</b>	<1.0	<1.0

## INFRA-RED


method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.9</b>	0.4	0.5
Nitration	Abs/cm *ASTM D7624 >20	<b>11.2</b>	9.4	8.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>24.5</b>	21.2	20.4

## FLUID DEGRADATION


method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>20.9</b>	17.5	16.2
Base Number (BN)	mg KOH/g ASTM D2896	<b>6.81</b>	8.69	7.83

# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

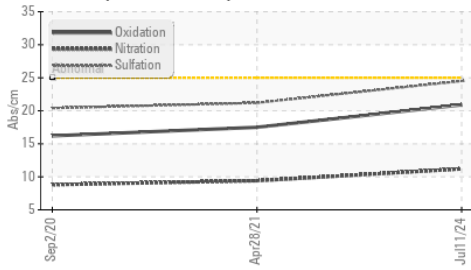

Base Number

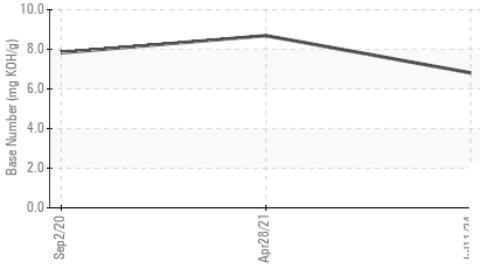









Viscosity @ 100°C

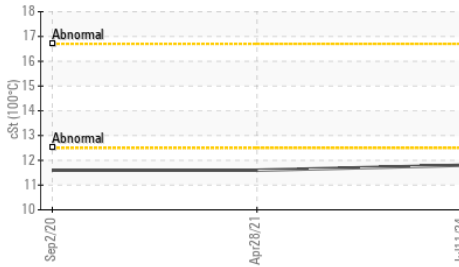

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	▲ MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.8	11.6	11.6

## GRAPHS

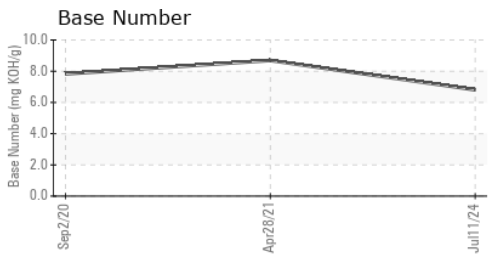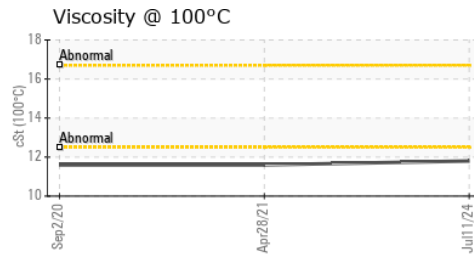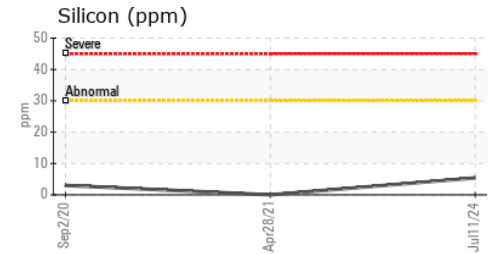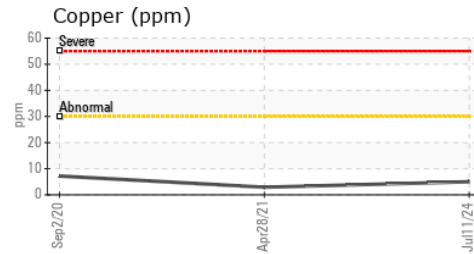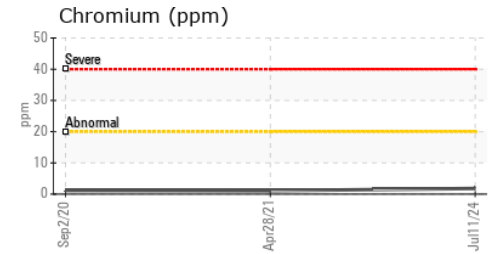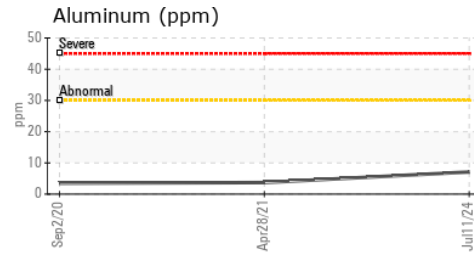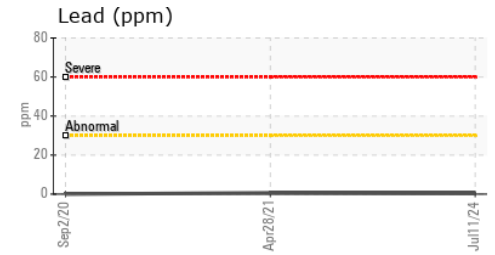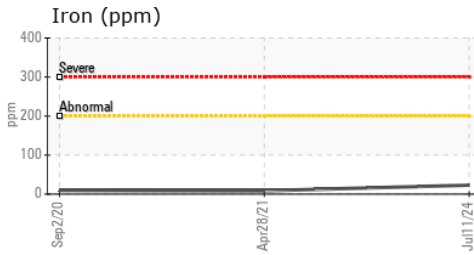

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0122767      **Received** : 17 Jul 2024  
**Lab Number** : 06239328      **Tested** : 18 Jul 2024  
**Unique Number** : 11128162      **Diagnosed** : 18 Jul 2024 - Jonathan Hester  
**Test Package** : MOB 2 ( Additional Tests: FuelDilution )

**PORTSIDE TRUCK AND AUTO - DIVERSIFIED AUTO**  
 100 TERMINAL ST  
 CHARLESTOWN, MA  
 US 02129

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact: BRYAN WINTER  
BWINTERS@DIVERSIFIEDAUTO.COM

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: 1(857)998-2229

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: