




OIL ANALYSIS REPORT

Sample Rating Trend

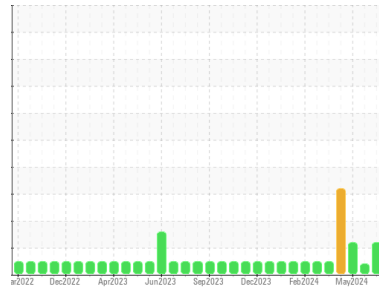

DEGRADATION



Machine Id
912066

Component
Natural Gas Engine

Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

DIAGNOSIS

Recommendation

The oil is near the end of its useful service life, recommend schedule an oil change. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN level is low. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0124100	GFL0120161	GFL0117249
Sample Date	Client Info	15 Jul 2024	29 May 2024	04 May 2024
Machine Age	hrs	6393	6072	5922
Oil Age	hrs	0	0	0
Oil Changed	Client Info	Not Changed	Not Changed	Not Changed
Sample Status		ABNORMAL	MARGINAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	7	37	6
Chromium	ppm ASTM D5185m >4	<1	3	1
Nickel	ppm ASTM D5185m >2	<1	<1	1
Titanium	ppm ASTM D5185m	<1	<1	<1
Silver	ppm ASTM D5185m >3	<1	<1	<1
Aluminum	ppm ASTM D5185m >9	6	7	4
Lead	ppm ASTM D5185m >30	19	<1	5
Copper	ppm ASTM D5185m >35	4	2	2
Tin	ppm ASTM D5185m >4	<1	<1	2
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	<1	0	2

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 50	3	3	<1
Barium	ppm ASTM D5185m 5	0	<1	0
Molybdenum	ppm ASTM D5185m 50	50	60	45
Manganese	ppm ASTM D5185m 0	<1	<1	1
Magnesium	ppm ASTM D5185m 560	555	882	544
Calcium	ppm ASTM D5185m 1510	1736	1119	1778
Phosphorus	ppm ASTM D5185m 780	837	1034	808
Zinc	ppm ASTM D5185m 870	1016	1179	1004
Sulfur	ppm ASTM D5185m 2040	2657	3031	3063

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >+100	6	18	6
Sodium	ppm ASTM D5185m	6	5	11
Potassium	ppm ASTM D5185m >20	3	9	3

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	0	0.4	0.1
Nitration	Abs/cm *ASTM D7624 >20	12.4	8.6	11.0
Sulfation	Abs/.1mm *ASTM D7415 >30	28.8	19.4	24.1

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	24.4	16.3	19.1
Base Number (BN)	mg KOH/g ASTM D2896 10.2	▲ 1.8	8.0	▲ 1.6







OIL ANALYSIS REPORT

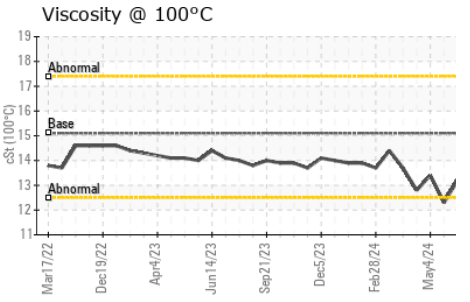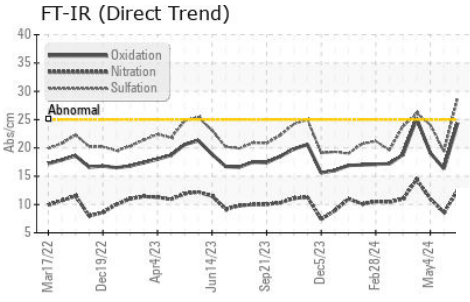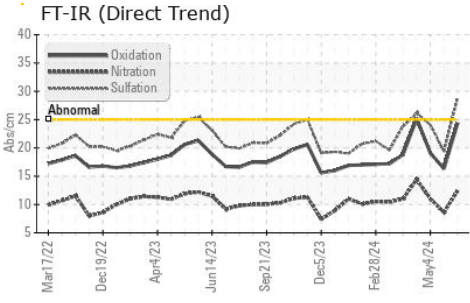

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	13.2	▲ 12.3	13.4

GRAPHS

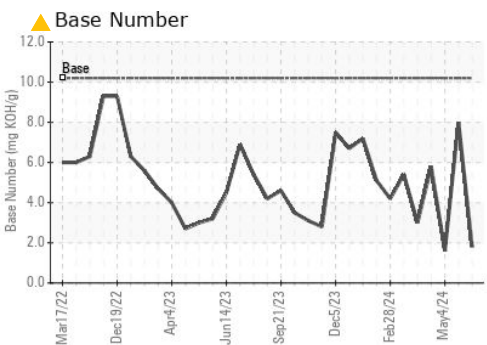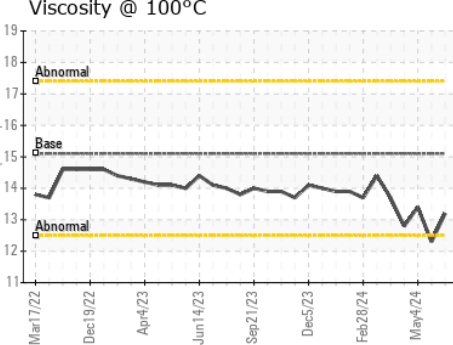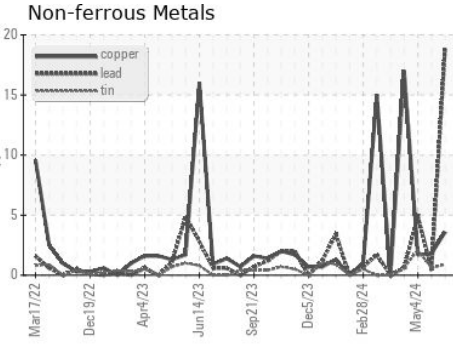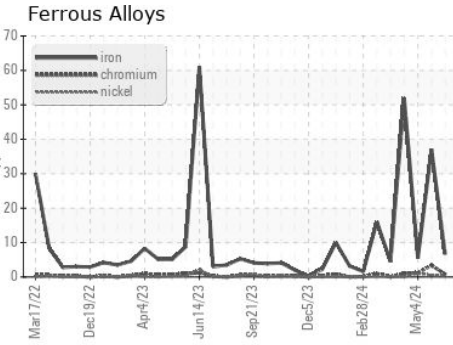

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0124100 **Received** : 18 Jul 2024
Lab Number : 06239849 **Tested** : 18 Jul 2024
Unique Number : 11128683 **Diagnosed** : 19 Jul 2024 - Sean Felton
Test Package : FLEET

GFL Environmental - 836 - Kansas City Hauling
 7801 East Truman Road
 Kansas City, MO
 US 64126
 Contact: Loyce Stewart
 loyce.stewart@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)